

Exclusives uPVC Casement Window



1 WINDOW COLOURS

All colours available in dual colour (matching exterior and interior), or colour on the exterior with either smooth white or white woodgrain interior



2 WINDOW HANDLES

This window comes as standard with an Off Set handle.

Min Width	Max Width
237mm	4500mm
Min Height	Max Height
232mm	2525mm

Cottage Casement Window	
Min Width	Max Width
348mm	4500mm
Min Height	Max Height
383mm	2525mm

HANDLE OPTIONS




PREMIUM COASTAL HANDLES




3 GLAZING OPTIONS

Lead Designs – Bespoke customer designs are available

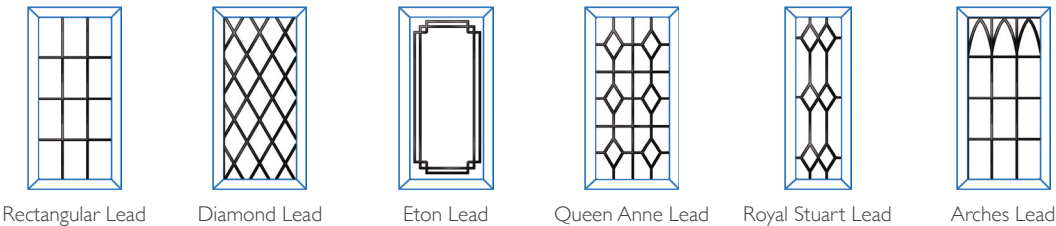

Privacy Glass options

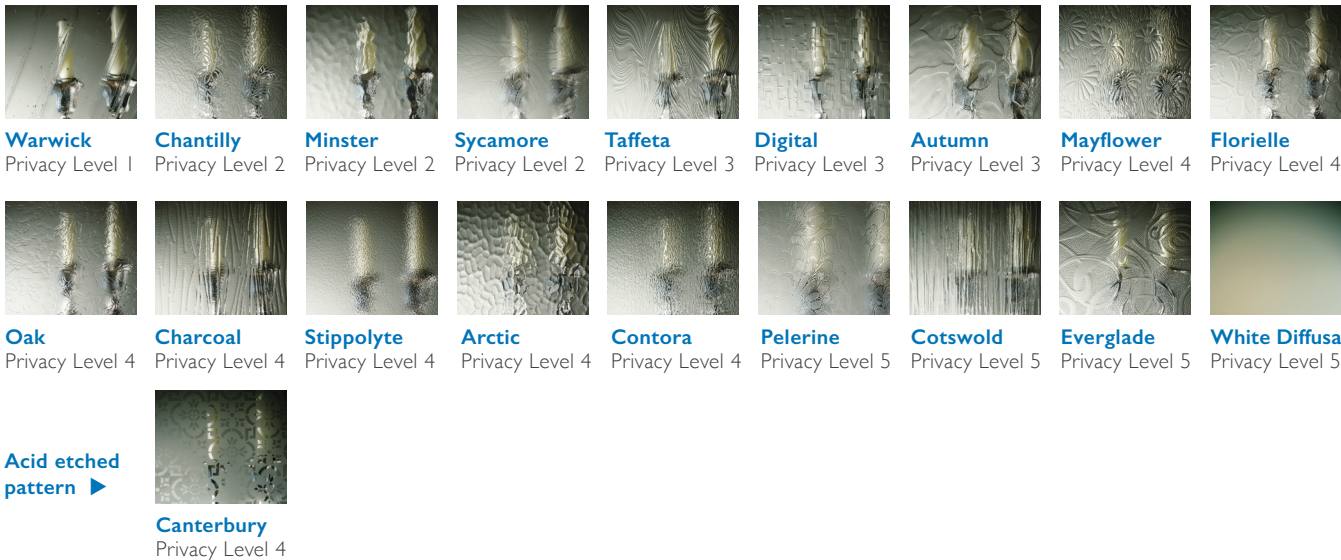

Exclusives uPVC Casement Window

TECHNICAL FEATURES

Finish	Smooth uPVC Woodgrain Textured Finish
Construction	Multi-chambered uPVC
Material	uPVC
Profile Style	Storm
Window and Frame Colours	White uPVC Agate Grey Anthracite Grey White Woodgrain Black (beck brown) Chartwell Green Irish Oak Cream Golden Oak Rosewood Silver Grey Slate Grey
Unequal SightLines	Yes
Equal SightLines	Yes
Locking system	GrabLock
Test standard	Latest PAS 24:2022 security and weatherproof standards
Secured by Design	Yes

GLAZING

Double Glazing 28mm	Energy Saver Plus Energy Saver Noise Reducing Ultimate Solar Control
Triple Glazing 36mm (used with Authentic Georgian Bars)	Energy Saver Plus
Triple Glazing 44mm	Energy Saver Plus Ultimate Solar Control
Glass Options	Privacy, Leaded, Decorative
Window Energy rating	A++ Triple Glazed A+ Double Glazed

ACCESSORIES

Stays	Standard, sash restricted and Egress easi clean
Georgian Bars	Internal Georgian Bars External Georgian Bars
Trickle ventilation	Yes – required to meet new Building Regulations
Standard Handles	Monkey Tail, Tear Drop
Standard Colours	Chrome, Gold, Black, Graphite
Premium Handles by Coastal	Opera, Regent, Inline
Premium Handles by Coastal Colours	Satin Brass, Satin Black, Stainless Steel

GUARANTEE

20 year guarantee against fog and condensation between the panes
20 year guarantee against discolouration of the white uPVC
10 year guarantee on the whole window including colour finish, handles, locking mechanism and installation

Lifetime Guarantee

Optional Upgrade
Lifetime Guarantee against fog and condensation between the panes
Lifetime Guarantee against discolouration of the white uPVC

4 WINDOW TECHNICAL DIMENSIONS

Chamfered cross section

