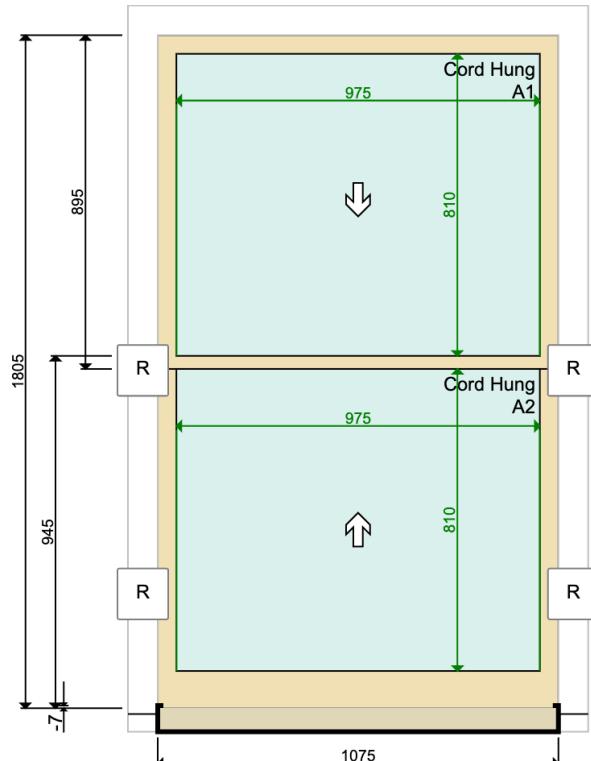


JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

<i>Customer</i>	<i>Job No</i>	<i>Item No</i>	<i>Sheet</i>
Perryman	N1465	1	1 of 1

Diagram



Sectional Details

Sash Head	50 mm	
Sash Stile	50 mm	
Sash Btm Rail (ext)	100 mm	Chamfered
Sash Midrail	35 mm	
Sash Thickness	45 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Location

Second Floor Rear Unknown

<i>Material</i>	Solid Sapele Hardwood	<i>Quantity</i>	1
			of shown on drawing

Glazing Bar	N/A
Profile	Ovolo
Glazing Rebate	16 x 33 mm

Ironmongery

- 1 x Fitch Fastener - Polished Brass
- 1 x Rola Sash Stops - Polished Brass
- 2 x Standard Lifter - Polished Brass
- 4 x Standard Pulley - Polished Brass

Glazing		Internal Pane	Spacer	External Pane
Top	4mm Thermaglass Toughened		10mm	4mm Float Toughened
Btm	4mm Thermaglass Toughened		10mm	4mm Float Toughened

Qwood	Black Tape, Black Spacer	Argon Filled
<i>Paint Finish</i>		
Internal	Farrow & Ball - All White No.2005	
External	Farrow & Ball - All White No.2005	
Cill	Farrow & Ball - All White No 2005	

Production Notes

45 x 1075 x 1805

Installation Notes

Installed: Internally
External Access: Item Easily Accessable
Hazard Below: Pedestrians, Pavement

Flat 6 living room

Job Tracking

Order received: 06-06-2024

Print date: 23-10-2024

Sold by: Robin Partridge

Last modified by: Kieran Eysel

Surveyed by: Kieran Eyle

Last modified by: Kieran Tyle
Last modified date: 23-10-2024

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

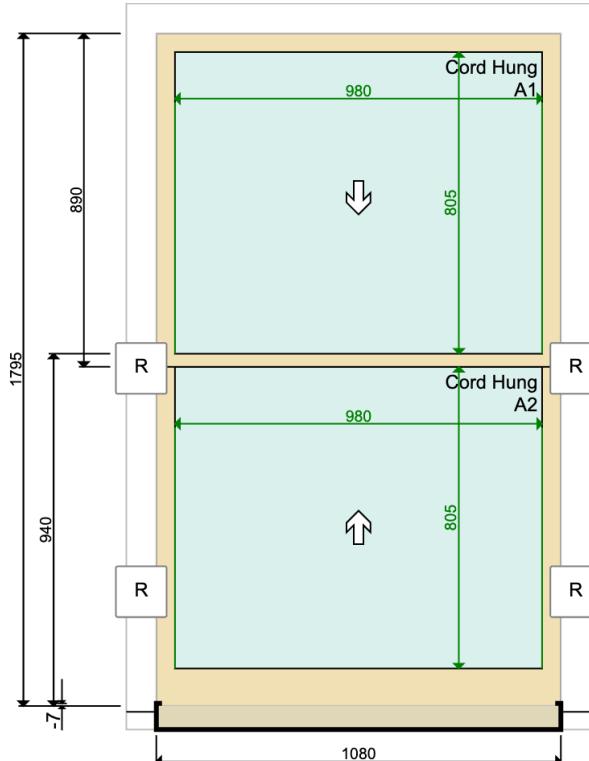
Customer Perryman	Job No N1465	Item No 2	Sheet 1 of 1		
Diagram					
Sectional Details		<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn No horn Btm Sash Horn No horn</p> 			
Location Second Floor Rear Unknown		<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>			
Material Solid Sapele Hardwood	Quantity 1 of shown on drawing	<p>Glazing Internal Pane Spacer External Pane Top 4mm Thermaglass Toughened 10mm 4mm Float Toughened Btm 4mm Thermaglass Toughened 10mm 4mm Float Toughened</p> <p>Qwood Black Tape, Black Spacer Argon Filled</p> <p>Paint Finish Internal Farrow & Ball - All White No.2005 External Farrow & Ball - All White No.2005 Cill Farrow & Ball - All White No.2005</p>			
Production Notes 45 x 1075 x 1805	<p>Installation Notes Installed: Internally External Access: Item Easily Accessible Hazard Below: Pedestrians, Pavement Flat 6 living room</p>				
211010133					
Job Tracking Order received: 06-06-2024 Sold by: Robin Partridge Surveyed by: Kieran Fyfe	<p>Print date: 23-10-2024 Last modified by: Kieran Fyfe Last modified date: 23-10-2024</p>				

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

<i>Customer</i> Perryman	<i>Job No</i> N1465	<i>Item No</i> 3	<i>Sheet</i> 1 of 1
------------------------------------	-------------------------------	----------------------------	-------------------------------

Diagram



Sectional Details

Sash Head	50 mm	
Sash Stile	50 mm	
Sash Btm Rail (ext)	100 mm	Chamfered
Sash Midrail	35 mm	
Sash Thickness	45 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Location

Second Floor Rear Unknown

Material	Solid Sapele Hardwood	Quantity	1
			of shown on drawing

Glazing Bar	N/A
Profile	Ovolo
Glazing Rebate	16 x 33 mm

Ironmongery

- 1 x Fitch Fastener - Polished Brass
- 1 x Rola Sash Stops - Polished Brass
- 2 x Standard Lifter - Polished Brass
- 4 x Standard Pulley - Polished Brass

Glazing		Internal Pane	Spacer	External Pane
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	

Btm | 4mm Thermaglass Toughened | 10mm | 4mm Float Toughened

Production Notes

45 x 1080 x 1795

Installation Notes

Installed: Internally
External Access: Item Easily Accessable
Hazard Below: Pedestrians Pavement

Flat 6 bed room

Job Tracking

Order received: 06-06-2024

Print date: 09.10.2024

Sold by: Robin Partridge

Surveyed by: Kieran Eysse

Last modified by: Kieran Eysel

Last modified by: Kieran Tyle
Last modified date: 23-10-2024

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	4	Sheet	1 of 1																				
Diagram					Sectional Details																						
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> 																							
Location	Second Floor Rear Unknown				Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm																						
Material	Solid Sapele Hardwood	Quantity	1																								
Ironmongery 1 x Rola Sash Stops - TBC 1 x Sash Fastener - TBC 2 x Sash Lift - TBC 4 x Standard Pulley - TBC				<p>Glazing Internal Pane Spacer External Pane</p> <table> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> </table> <p>Qwood Black Tape, Black Spacer Argon Filled</p> <p>Paint Finish</p> <table> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> </table>				Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Internal	Farrow & Ball - All White No.2005			External	Farrow & Ball - All White No.2005			Cill	Farrow & Ball - All White No.2005		
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																								
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																								
Internal	Farrow & Ball - All White No.2005																										
External	Farrow & Ball - All White No.2005																										
Cill	Farrow & Ball - All White No.2005																										
Production Notes	<p>*bespoke parting bead and staff bead required for arch *true arch, rad = 435 45 x 870 x 1825</p>				Installation Notes																						
				Installed:	Internally																						
				211010133																							
Job Tracking		Print date: 23-10-2024																									
Order received: 06-06-2024		Last modified by: Kieran Fyfe																									
Sold by: Robin Partridge		Last modified date: 20-10-2024																									
Surveyed by: Kieran Fyfe																											

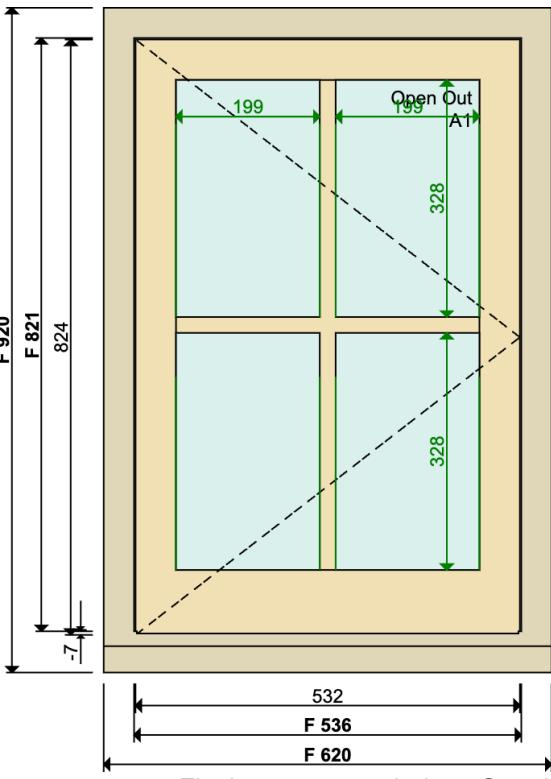
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Perryman	Job No N1465	Item No 5	Sheet 1 of 1		
Diagram					
Sectional Details					
		Sash Head	50 mm		
		Sash Stile	50 mm		
		Sash Btm Rail (ext)	100 mm		
		Sash Midrail	35 mm		
		Sash Thickness	43 mm		
		Top Sash Horn	No horn		
		Btm Sash Horn	No horn		
Location	First Floor Rear Unknown				
Material	Solid Sapele Hardwood	Quantity	1		
		of shown on drawing			
<i>Ironmongery</i>		<i>Glazing</i>			
1 x Fitch Fastener - Polished Brass		Internal Pane	Spacer		
1 x Rola Sash Stops - Polished Brass		8mm	External Pane		
2 x Standard Lifter - Polished Brass		4mm Thermaglass Toughened	4mm Float Toughened		
4 x Standard Pulley - Polished Brass		8mm	4mm Thermaglass Toughened		
		Qwood	Black Tape, Black Spacer		
			Argon Filled		
<i>Paint Finish</i>					
Internal Farrow & Ball - All White No.2005					
External Farrow & Ball - All White No.2005					
Cill Farrow & Ball - All White No.2005					
<i>Production Notes</i>		<i>Installation Notes</i>			
*rebated parting bead required		Installed:	Internally		
43 x 1030 x 1930		External Access:	Scaffold by Customer		
		Hazard Below:	Pedestrians, Pavement		
		Flat 5 bedroom			
211010131					
<i>Job Tracking</i>					
Order received: 06-06-2024		Print date: 23-10-2024			
Sold by: Robin Partridge		Last modified by: Kieran Fyfe			
Surveyed by: Kieran Fyfe		Last modified date: 23-10-2024			

JOINERY DETAIL SHEET

1 x 1 Complete New Flush Casement Window (45mm)

Customer	Perryman	Job No	N1465	Item No	6	Sheet	1 of 1										
Diagram						Sectional Details <table> <tr> <td>Gasket Colour</td> <td>White</td> </tr> <tr> <td>Jamb Type</td> <td>Solid Profiled</td> </tr> <tr> <td>Head</td> <td>80 x 55 mm</td> </tr> <tr> <td>Jamb</td> <td>80 x 55 mm</td> </tr> <tr> <td>Finished Cill</td> <td>130 x 70 mm</td> </tr> </table> 		Gasket Colour	White	Jamb Type	Solid Profiled	Head	80 x 55 mm	Jamb	80 x 55 mm	Finished Cill	130 x 70 mm
Gasket Colour	White																
Jamb Type	Solid Profiled																
Head	80 x 55 mm																
Jamb	80 x 55 mm																
Finished Cill	130 x 70 mm																
						<table> <tr> <td>Sash Head</td> <td>56 mm</td> </tr> <tr> <td>Sash Stile</td> <td>56 mm</td> </tr> <tr> <td>Sash Btm Rail (ext)</td> <td>90 mm</td> </tr> <tr> <td>Sash Thickness</td> <td>45 mm</td> </tr> </table> 		Sash Head	56 mm	Sash Stile	56 mm	Sash Btm Rail (ext)	90 mm	Sash Thickness	45 mm		
Sash Head	56 mm																
Sash Stile	56 mm																
Sash Btm Rail (ext)	90 mm																
Sash Thickness	45 mm																
Location		First Floor Rear Unknown				<table> <tr> <td>Glazing Bar</td> <td>22 mm</td> </tr> <tr> <td>Profile</td> <td>Ovolo</td> </tr> <tr> <td>Glazing Rebate</td> <td>16 x 33 mm</td> </tr> </table>		Glazing Bar	22 mm	Profile	Ovolo	Glazing Rebate	16 x 33 mm				
Glazing Bar	22 mm																
Profile	Ovolo																
Glazing Rebate	16 x 33 mm																
Solid Sapele Hardwood sashes, Solid Sapele Hardwood frame, Solid Sapele Hardwood cill		Quantity 1 of shown on drawing															
Ironmongery 2 x 3inch Brass Hinges 1 x Spoon End 10 inch Stay - Polished Brass 1 x Spoon End Fastener - Polished Brass		Glazing <table> <tr> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Case 4mm Thermaglass Toughened</td> <td>10mm</td> <td> 4mm Float Toughened</td> </tr> </table>				Internal Pane	Spacer	External Pane	Case 4mm Thermaglass Toughened	10mm	4mm Float Toughened						
Internal Pane	Spacer	External Pane															
Case 4mm Thermaglass Toughened	10mm	4mm Float Toughened															
		Qwood Black Tape, Black Spacer Argon Filled															
		Paint Finish <table> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> </tr> </table>				Internal	Farrow & Ball - All White No.2005	External	Farrow & Ball - All White No.2005	Cill	Farrow & Ball - All White No.2005						
Internal	Farrow & Ball - All White No.2005																
External	Farrow & Ball - All White No.2005																
Cill	Farrow & Ball - All White No.2005																
Production Notes 620 x 920		Installation Notes <table> <tr> <td>Installed:</td> <td>Internally</td> </tr> <tr> <td>External Access:</td> <td>Scaffold by Customer</td> </tr> <tr> <td colspan="2">Flat 5 bedroom</td></tr> </table>				Installed:	Internally	External Access:	Scaffold by Customer	Flat 5 bedroom							
Installed:	Internally																
External Access:	Scaffold by Customer																
Flat 5 bedroom																	
		211010133															
Job Tracking		Order received: 06-06-2024 Print date: 23-10-2024 Sold by: Robin Partridge Last modified by: Kieran Fyfe Surveyed by: Kieran Fyfe Last modified date: 20-10-2024															

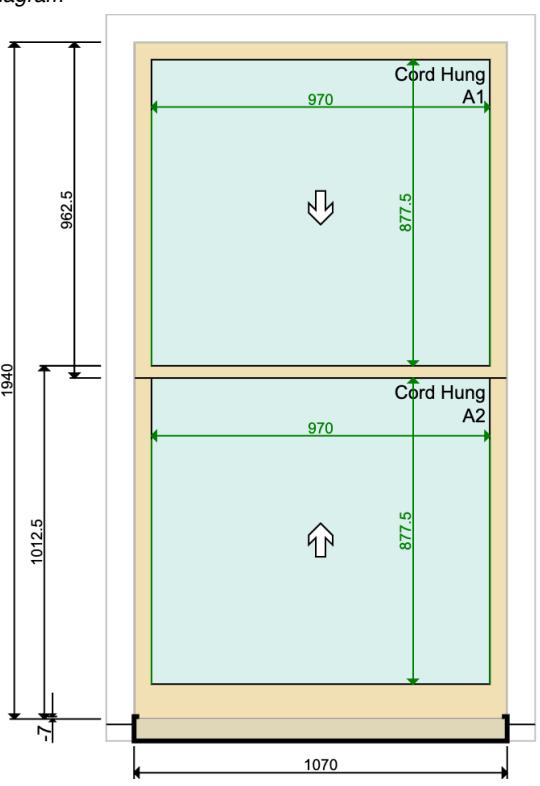
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	7	Sheet	1 of 1																			
Diagram						Sectional Details																				
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 43 mm Top Sash Horn No horn Btm Sash Horn No horn</p> 																						
Location		First Floor Rear Unknown																								
Material	Solid Sapele Hardwood	Quantity	1	of shown on drawing																						
Ironmongery		<table border="1"> <tr> <td colspan="2">Glazing</td> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>8mm</td> <td>4mm</td> <td>Float Toughened</td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>8mm</td> <td>4mm</td> <td>Float Toughened</td> </tr> <tr> <td colspan="2">Qwood</td><td colspan="2">Black Tape, Black Spacer</td><td>Argon Filled</td> </tr> </table>					Glazing		Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	8mm	4mm	Float Toughened	Btm	4mm Thermaglass Toughened	8mm	4mm	Float Toughened	Qwood		Black Tape, Black Spacer		Argon Filled
Glazing		Internal Pane	Spacer	External Pane																						
Top	4mm Thermaglass Toughened	8mm	4mm	Float Toughened																						
Btm	4mm Thermaglass Toughened	8mm	4mm	Float Toughened																						
Qwood		Black Tape, Black Spacer		Argon Filled																						
		<table border="1"> <tr> <td colspan="2">Paint Finish</td> <td>Internal</td> <td colspan="3">Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> </table>						Paint Finish		Internal	Farrow & Ball - All White No.2005			External	Cill	Farrow & Ball - All White No.2005	Farrow & Ball - All White No.2005									
Paint Finish		Internal	Farrow & Ball - All White No.2005																							
External	Cill	Farrow & Ball - All White No.2005	Farrow & Ball - All White No.2005																							
Production Notes		Installation Notes																								
*rebated parting bead required		<p>Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement</p> <p>Flat 5</p>																								
43 x 1025 x 1960																										
Cill = 70 x 145 x 1100																										
211010131																										
Job Tracking																										
Order received: 06-06-2024		Print date: 23-10-2024																								
Sold by: Robin Partridge		Last modified by: Kieran Fyfe																								
Surveyed by: Kieran Fyfe		Last modified date: 23-10-2024																								

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Perryman	Job No N1465	Item No 8	Sheet 1 of 1															
Diagram		Sectional Details																
		<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn No horn Btm Sash Horn No horn</p> <p></p>																
Location First Floor Rear Unknown		<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>																
Material Solid Sapele Hardwood	Quantity 1 of shown on drawing	<p>Glazing</p> <table border="1"> <tr> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top 4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm 4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> </table> <p>Qwood Black Tape, Black Spacer Argon Filled</p> <p>Paint Finish</p> <table border="1"> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> </tr> </table>		Internal Pane	Spacer	External Pane	Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Internal	Farrow & Ball - All White No.2005	External	Farrow & Ball - All White No.2005	Cill	Farrow & Ball - All White No.2005
Internal Pane	Spacer	External Pane																
Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened																
Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened																
Internal	Farrow & Ball - All White No.2005																	
External	Farrow & Ball - All White No.2005																	
Cill	Farrow & Ball - All White No.2005																	
Production Notes 45 x 1070 x 1940		Installation Notes Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 3 living room																
211010133																		
Job Tracking																		
Order received: 06-06-2024	Print date: 23-10-2024	Last modified by: Kieran Fyfe	Last modified date: 23-10-2024															

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	9	Sheet	1 of 1															
Diagram					Sectional Details																	
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn No horn Btm Sash Horn No horn</p> 																		
Location	First Floor Rear Unknown				Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm																	
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p> <p>Glazing</p> <table> <tr> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top 4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm 4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> </table> <p>Qwood Black Tape, Black Spacer Argon Filled</p> <p>Paint Finish</p> <table> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> </tr> </table>				Internal Pane	Spacer	External Pane	Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Internal	Farrow & Ball - All White No.2005	External	Farrow & Ball - All White No.2005	Cill	Farrow & Ball - All White No.2005
Internal Pane	Spacer	External Pane																				
Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened																				
Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened																				
Internal	Farrow & Ball - All White No.2005																					
External	Farrow & Ball - All White No.2005																					
Cill	Farrow & Ball - All White No.2005																					
Production Notes	<p>45 x 1075 x 1940</p>				Installation Notes																	
				<p>Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 3 bedroom</p>																		
211010133																						
Job Tracking		<p>Order received: 06-06-2024 Print date: 23-10-2024 Sold by: Robin Partridge Last modified by: Kieran Fyfe Surveyed by: Kieran Fyfe Last modified date: 23-10-2024</p>																				

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Perryman	Job No N1465	Item No 10	Sheet 1 of 1																										
Diagram		Sectional Details																											
		<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn No horn Btm Sash Horn No horn</p> <p></p>																											
Location First Floor Rear Unknown		<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>																											
Material Solid Sapele Hardwood	Quantity 1 of shown on drawing	<p>Glazing</p> <table> <thead> <tr> <th></th> <th>Internal Pane</th> <th>Spacer</th> <th>External Pane</th> </tr> </thead> <tbody> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Qwood</td> <td></td> <td>Black Tape, Black Spacer</td> <td>Argon Filled</td> </tr> </tbody> </table> <p>Paint Finish</p> <table> <tbody> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> </tr> </tbody> </table>			Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened					Qwood		Black Tape, Black Spacer	Argon Filled	Internal	Farrow & Ball - All White No.2005	External	Farrow & Ball - All White No.2005	Cill	Farrow & Ball - All White No.2005
	Internal Pane	Spacer	External Pane																										
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																										
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																										
Qwood		Black Tape, Black Spacer	Argon Filled																										
Internal	Farrow & Ball - All White No.2005																												
External	Farrow & Ball - All White No.2005																												
Cill	Farrow & Ball - All White No.2005																												
Production Notes 45 x 1070 x 1950		Installation Notes Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 3 bedroom																											
211010133																													
Job Tracking																													
Order received: 06-06-2024	Print date: 23-10-2024	Last modified by: Kieran Fyfe	Last modified date: 23-10-2024																										

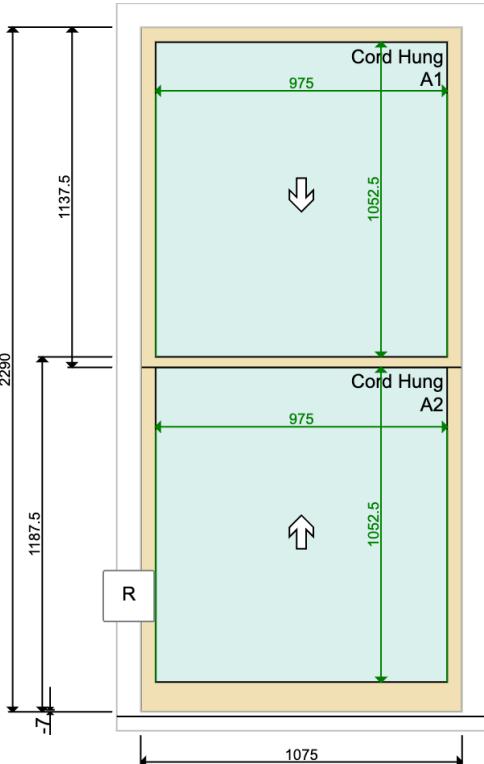
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	11	Sheet	1 of 1																				
Diagram					Sectional Details																						
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> 																							
Location	First Floor Rear Unknown				<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>																						
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p>																							
Ironmongery	<p>1 x Rola Sash Stops - TBC 1 x Sash Fastener - TBC 2 x Sash Lift - TBC 4 x Standard Pulley - TBC</p>																										
				<table border="1"> <thead> <tr> <th colspan="2">Glazing</th> <th>Internal Pane</th> <th>Spacer</th> <th>External Pane</th> </tr> </thead> <tbody> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> <td></td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> <td></td> </tr> <tr> <td colspan="2"></td><td colspan="2" rowspan="2">Qwood</td><td>Black Tape, Black Spacer Argon Filled</td> </tr> </tbody> </table>				Glazing		Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened		Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened				Qwood		Black Tape, Black Spacer Argon Filled
Glazing		Internal Pane	Spacer	External Pane																							
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																								
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																								
		Qwood		Black Tape, Black Spacer Argon Filled																							
				<table border="1"> <thead> <tr> <th colspan="2">Paint Finish</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> </tbody> </table>				Paint Finish				Internal	Farrow & Ball - All White No.2005			External	Farrow & Ball - All White No.2005			Cill	Farrow & Ball - All White No.2005						
Paint Finish																											
Internal	Farrow & Ball - All White No.2005																										
External	Farrow & Ball - All White No.2005																										
Cill	Farrow & Ball - All White No.2005																										
Production Notes	<p>45 x 850 x 1800, 60mm arch</p>																										
				<p>Installation Notes</p> <p>Installed: Internally Vertical Sliding SDG: Remove and Dispose</p>																							
				<p>211010133</p>																							
Job Tracking	<p>Order received: 06-06-2024 Sold by: Robin Partridge Surveyed by: Kieran Fyfe</p>																										
				<p>Print date: 23-10-2024 Last modified by: Kieran Fyfe Last modified date: 23-10-2024</p>																							

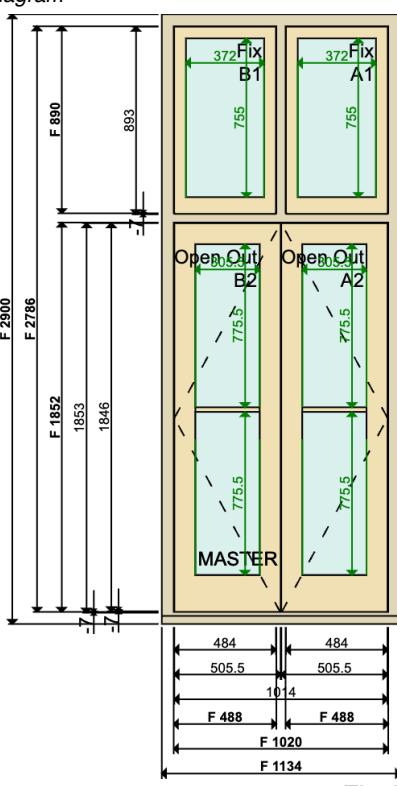
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Perryman	Job No N1465	Item No 12	Sheet 1 of 1															
Diagram		Sectional Details																
		<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 43 mm Top Sash Horn No horn Btm Sash Horn No horn</p> <p></p>																
Location Ground Floor Rear Unknown		<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 31 mm</p>																
Material Solid Sapele Hardwood	Quantity 1 of shown on drawing																	
Ironmongery 1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass	<p>Glazing</p> <table border="1"> <tr> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top 4mm Thermaglass Toughened</td> <td>8mm</td> <td> 4mm Float Toughened</td> </tr> <tr> <td>Btm 4mm Thermaglass Toughened</td> <td>8mm</td> <td> 4mm Float Toughened</td> </tr> </table> <p>Qwood Black Tape, Black Spacer Argon Filled</p> <p>Paint Finish</p> <table border="1"> <tr> <td>Internal Farrow & Ball - All White No.2005</td> <td></td> </tr> <tr> <td>External Farrow & Ball - All White No.2005</td> <td></td> </tr> <tr> <td>Cill Farrow & Ball - All White No.2005</td> <td></td> </tr> </table>			Internal Pane	Spacer	External Pane	Top 4mm Thermaglass Toughened	8mm	4mm Float Toughened	Btm 4mm Thermaglass Toughened	8mm	4mm Float Toughened	Internal Farrow & Ball - All White No.2005		External Farrow & Ball - All White No.2005		Cill Farrow & Ball - All White No.2005	
Internal Pane	Spacer	External Pane																
Top 4mm Thermaglass Toughened	8mm	4mm Float Toughened																
Btm 4mm Thermaglass Toughened	8mm	4mm Float Toughened																
Internal Farrow & Ball - All White No.2005																		
External Farrow & Ball - All White No.2005																		
Cill Farrow & Ball - All White No.2005																		
Production Notes 43 x 1075 x 2290		Installation Notes Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 1 living room																
211010131																		
Job Tracking																		
Order received: 06-06-2024	Print date: 23-10-2024	Last modified by: Kieran Fyfe	Last modified date: 23-10-2024															
Sold by: Robin Partridge	Surveyed by: Kieran Fyfe																	

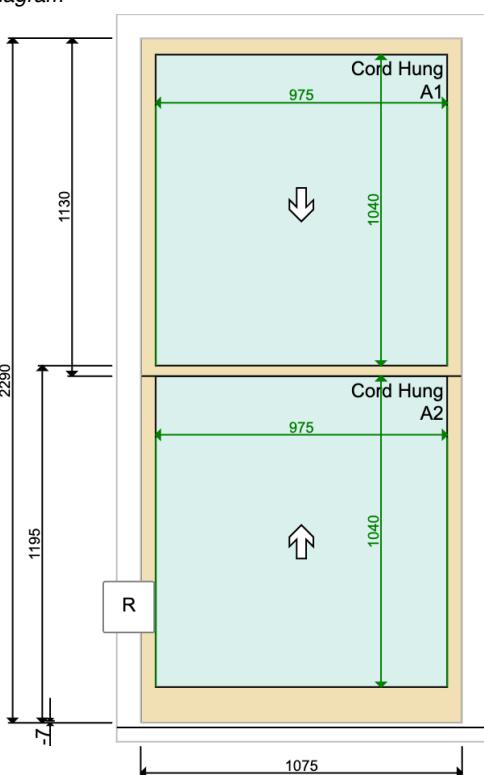
JOINERY DETAIL SHEET

1 x 1 Complete New Flush Door (45mm)

Customer	Perryman	Job No	N1465	Item No	13	Sheet	1 of 1		
Diagram						Sectional Details			
		<p>Cill Stop White Gasket Colour Solid Profiled Jamb Type 120 x 70 mm Head 120 x 70 mm Jamb 120 x 70 mm Mullion 120 x 70 mm Transom 120 x 70 mm Finished Cill 120 x 70 mm</p> <p>Sash Head 56 mm Sash Stile 56 mm Fanlight Btm Rail (ext) 82 mm Chamfered Sash Thickness 45 mm</p> <p>Door Head 100 mm Door Stile 100 mm Door Btm Rail (ext) 180 mm Chamfered Door Meetintig Stile 203 mm incl. 3mm gap Door Thickness 45 mm</p> <p>Glazing Bar 22 mm Profile Ovolo Glazing Rebate 16 x 33 mm</p>							
Flush door, Opening out, Viewed externally									
Location		Ground Floor Front Flat 1 - Living Room							
Solid Sapele Hardwood sashes, Solid Sapele Hardwood frame, Solid Sapele Hardwood cill		Quantity		1	of shown on drawing				
Ironmongery		Glazing							
6 x 4inch Brass Hinges 1 x Europrofile Sash Lock & Cylinder 2 x Standard Range Door Lever 4 x Standard Range Flush Bolts		Internal Pane		Spacer		External Pane			
		Fan 4mm Thermaglass Toughened		10mm 4mm Float Toughened					
		Door 4mm Thermaglass Toughened		10mm 4mm Float Toughened					
		Qwood				Black Tape, Black Spacer			
						Argon Filled			
Paint Finish									
Internal Farrow & Ball - All White No.2005									
External Farrow & Ball - All White No.2005									
Cill Farrow & Ball - All White No.2005									
Production Notes		Installation Notes							
Weatherstrip on door externally 1150 x 2900		Installed: Internally Shutter Boxes: Remove and Re-fit							
		Flat 1 living room							
211010133									
Job Tracking									
Order received: 06-06-2024		Print date: 23-10-2024							
Sold by: Robin Partridge		Last modified by: Kieran Fyfe							
Surveyed by: Kieran Fyfe		Last modified date: 23-10-2024							

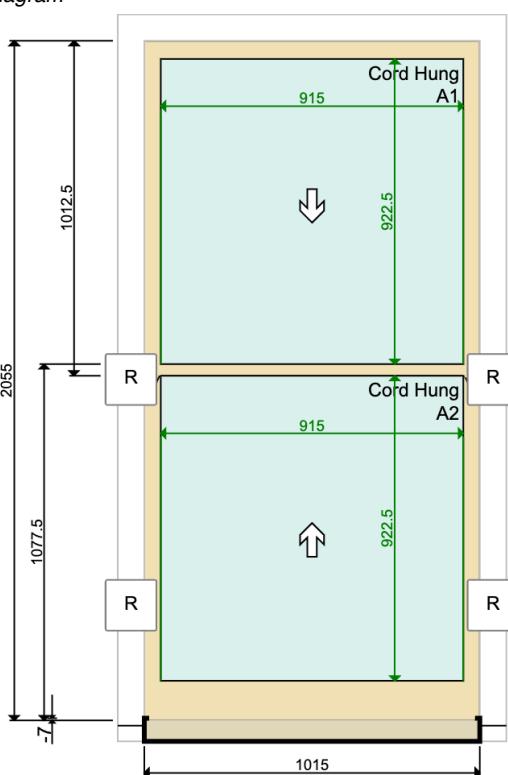
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	14	Sheet	1 of 1																										
Diagram					Sectional Details																												
				<p>Sash Head 55 mm Sash Stile 50 mm Sash Btm Rail (ext) 120 mm Chamfered Sash Midrail 35 mm Sash Thickness 43 mm Top Sash Horn No horn Btm Sash Horn No horn</p> 																													
Location	Ground Floor Rear Unknown				<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 31 mm</p>																												
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p>																													
<p>Ironmongery 1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass</p>				<table border="1"> <thead> <tr> <th colspan="2">Glazing</th> <th>Internal Pane</th> <th>Spacer</th> <th>External Pane</th> </tr> </thead> <tbody> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>8mm</td> <td>4mm</td> <td>Float Toughened</td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>8mm</td> <td>4mm</td> <td>Float Toughened</td> </tr> <tr> <td colspan="2"></td><td colspan="2">Qwood</td><td>Black Tape, Black Spacer Argon Filled</td> </tr> </tbody> </table> <p>Paint Finish</p> <table> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> </tr> </table>				Glazing		Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	8mm	4mm	Float Toughened	Btm	4mm Thermaglass Toughened	8mm	4mm	Float Toughened			Qwood		Black Tape, Black Spacer Argon Filled	Internal	Farrow & Ball - All White No.2005	External	Farrow & Ball - All White No.2005	Cill	Farrow & Ball - All White No.2005
Glazing		Internal Pane	Spacer	External Pane																													
Top	4mm Thermaglass Toughened	8mm	4mm	Float Toughened																													
Btm	4mm Thermaglass Toughened	8mm	4mm	Float Toughened																													
		Qwood		Black Tape, Black Spacer Argon Filled																													
Internal	Farrow & Ball - All White No.2005																																
External	Farrow & Ball - All White No.2005																																
Cill	Farrow & Ball - All White No.2005																																
Production Notes				Installation Notes																													
45 x 1075 x 2290				<p>Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 1 bathroom</p>																													
211010131																																	
Job Tracking																																	
Order received: 06-06-2024		Print date: 23-10-2024																															
Sold by: Robin Partridge		Last modified by: Kieran Fyfe																															
Surveyed by: Kieran Fyfe		Last modified date: 23-10-2024																															

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

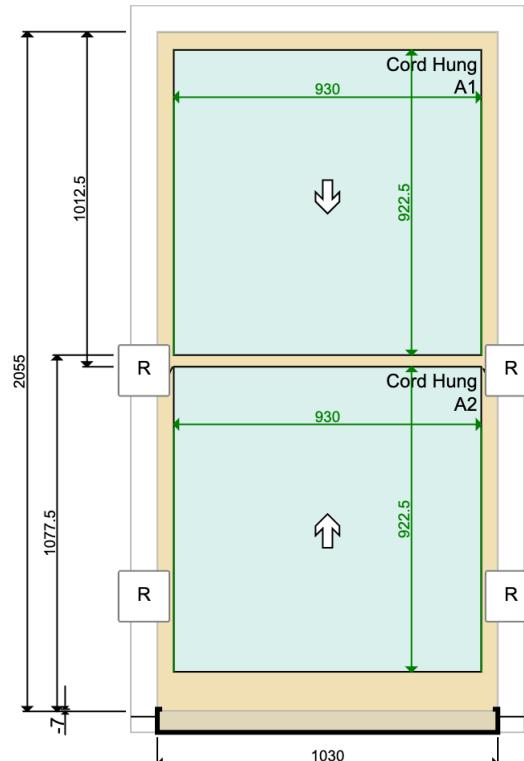
Customer	Perryman	Job No	N1465	Item No	15	Sheet	1 of 1																												
Diagram					Sectional Details																														
				<table> <tr> <td>Sash Head</td> <td>55 mm</td> <td></td> <td></td> </tr> <tr> <td>Sash Stile</td> <td>50 mm</td> <td></td> <td></td> </tr> <tr> <td>Sash Btm Rail (ext)</td> <td>120 mm</td> <td>Chamfered</td> <td></td> </tr> <tr> <td>Sash Midrail</td> <td>35 mm</td> <td></td> <td></td> </tr> <tr> <td>Sash Thickness</td> <td>45 mm</td> <td></td> <td></td> </tr> <tr> <td>Top Sash Horn</td> <td>Type H</td> <td>60 mm</td> <td></td> </tr> <tr> <td>Btm Sash Horn</td> <td>No horn</td> <td></td> <td></td> </tr> </table>				Sash Head	55 mm			Sash Stile	50 mm			Sash Btm Rail (ext)	120 mm	Chamfered		Sash Midrail	35 mm			Sash Thickness	45 mm			Top Sash Horn	Type H	60 mm		Btm Sash Horn	No horn		
Sash Head	55 mm																																		
Sash Stile	50 mm																																		
Sash Btm Rail (ext)	120 mm	Chamfered																																	
Sash Midrail	35 mm																																		
Sash Thickness	45 mm																																		
Top Sash Horn	Type H	60 mm																																	
Btm Sash Horn	No horn																																		
																																			
Location	Ground Floor Rear Unknown				<table> <tr> <td>Glazing Bar</td> <td>N/A</td> <td></td> </tr> <tr> <td>Profile</td> <td>Ovolo</td> <td></td> </tr> <tr> <td>Glazing Rebate</td> <td>16 x 33 mm</td> <td></td> </tr> </table>			Glazing Bar	N/A		Profile	Ovolo		Glazing Rebate	16 x 33 mm																				
Glazing Bar	N/A																																		
Profile	Ovolo																																		
Glazing Rebate	16 x 33 mm																																		
Material	Solid Sapele Hardwood	Quantity	1	<table> <tr> <td>of shown on drawing</td> <td></td> <td></td> <td></td> </tr> </table>				of shown on drawing																											
of shown on drawing																																			
Ironmongery	<table> <tr> <td>1 x Rola Sash Stops - TBC</td> <td>Glazing</td> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>1 x Sash Fastener - TBC</td> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>2 x Sash Lift - TBC</td> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>4 x Standard Pulley - TBC</td> <td>Qwood</td> <td></td> <td>Black Tape, Black Spacer</td> <td>Argon Filled</td> </tr> </table>				1 x Rola Sash Stops - TBC	Glazing	Internal Pane	Spacer	External Pane	1 x Sash Fastener - TBC	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	2 x Sash Lift - TBC	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened	4 x Standard Pulley - TBC	Qwood		Black Tape, Black Spacer	Argon Filled											
1 x Rola Sash Stops - TBC	Glazing	Internal Pane	Spacer	External Pane																															
1 x Sash Fastener - TBC	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																															
2 x Sash Lift - TBC	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																															
4 x Standard Pulley - TBC	Qwood		Black Tape, Black Spacer	Argon Filled																															
	<table> <tr> <td></td> <td>Paint Finish</td> <td></td> <td></td> </tr> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> </table>					Paint Finish			Internal	Farrow & Ball - All White No.2005			External	Farrow & Ball - All White No.2005			Cill	Farrow & Ball - All White No.2005																	
	Paint Finish																																		
Internal	Farrow & Ball - All White No.2005																																		
External	Farrow & Ball - All White No.2005																																		
Cill	Farrow & Ball - All White No.2005																																		
Production Notes	45 x 1015 x 2055				Installation Notes																														
					Installed: Internally																														
				<p style="text-align: center;">2 10 0 33</p>																															
Job Tracking																																			
Order received: 06-06-2024		Print date: 23-10-2024																																	
Sold by: Robin Partridge		Last modified by: Kieran Fyfe																																	
Surveyed by: Kieran Fyfe		Last modified date: 23-10-2024																																	

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

<i>Customer</i>	<i>Job No</i>	<i>Item No</i>	<i>Sheet</i>
Perryman	N1465	16	1 of 1

Diagram



Sectional Details

Sash Head	55 mm
Sash Stile	50 mm
Sash Btm Rail (ext)	120 mm
Sash Midrail	35 mm
Sash Thickness	45 mm
Top Sash Horn	Type H
Btm Sash Horn	No horn



Location

Ground Floor Rear Unknown

Material	Solid Sapele Hardwood	Quantity	1
		of shown on drawing	

Glazing Bar	N/A
Profile	Ovolo
Glazing Rebate	16 x 33 mm

Ironmongery

- 1 x Rola Sash Stops - TBC
- 1 x Sash Fastener - TBC
- 2 x Sash Lift - TBC
- 4 x Standard Pulley - TBC

Glazing		Internal Pane	Spacer	External Pane
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened	
Qwood		Black Tape, Black Spacer		Argon Filled
Paint Finish				
Internal	Farrow & Ball - All White No.2005			
External	Farrow & Ball - All White No.2005			
Cill	Farrow & Ball - All White No.2005			

Production Notes

45 x 1030 x 2055

Installation Notes

Installed: Internally

Flat 2 bedroom

2 | 10 | 0 | 33

Job Tracking

Order received: 06-06-2024

Print date: 23-10-2024

Order received: 08-06-2018

Last modified by: Kieran Eysel

Sold by: Robin Partridge

Last modified by: Kieran Fyle

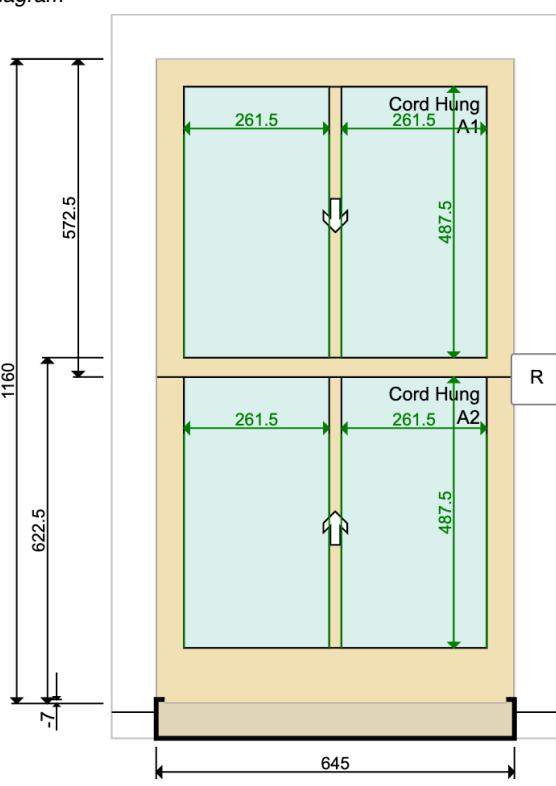
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	17	Sheet	1 of 1		
Diagram					Sectional Details				
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn No horn Btm Sash Horn No horn</p> 					
Location	Second Floor LHS Unknown								
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p> <p>Glazing Bar 22 mm Profile Ovolo Glazing Rebate 16 x 33 mm</p>					
Ironmongery	<p>1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass</p>				<p>Glazing Internal Pane Spacer External Pane</p> <p>Top 4mm Thermaglass Toughened 10mm 4mm Float Toughened</p> <p>Btm 4mm Thermaglass Toughened 10mm 4mm Float Toughened</p> <p>Qwood Black Tape, Black Spacer Argon Filled</p>				
				<p>Paint Finish</p> <p>Internal Farrow & Ball - All White No.2005 External Farrow & Ball - All White No.2005 Cill Farrow & Ball - All White No.2005</p>					
Production Notes	<p>45 x 645 x 1160 Cill = 70 x 145 x 700 Outerjamb = 17 x 90 x 250 - 2 of, rounded button bead</p>				<p>Installation Notes</p> <p>Installed: Internally Hazard Below: Main Entrance Flat 7</p>				
				<p>211010133</p>					
Job Tracking	<p>Order received: 06-06-2024 Sold by: Robin Partridge Surveyed by: Kieran Fyfe</p>				<p>Print date: 23-10-2024 Last modified by: Kieran Fyfe Last modified date: 23-10-2024</p>				

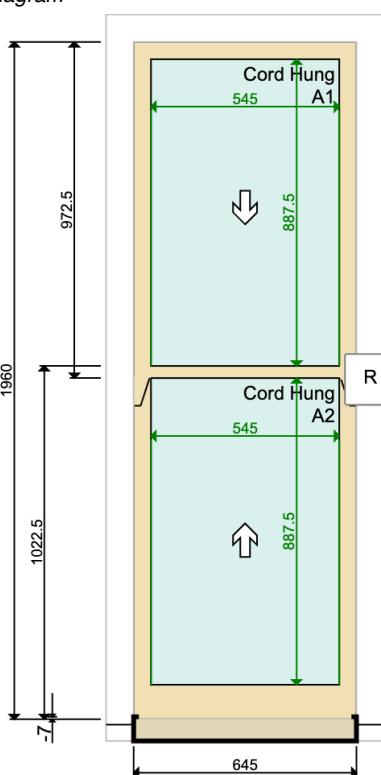
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Perryman	Job No N1465	Item No 18	Sheet 1 of 1																		
Diagram		Sectional Details																			
		<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn No horn Btm Sash Horn No horn</p> <p></p>																			
Location Second Floor LHS Unknown		<p>Glazing Bar 22 mm Profile Ovolo Glazing Rebate 16 x 33 mm</p>																			
Material Solid Sapele Hardwood	Quantity 1 of shown on drawing	<p>Glazing</p> <table border="1"> <tr> <th></th> <th>Internal Pane</th> <th>Spacer</th> <th>External Pane</th> </tr> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> </table> <p>Qwood Black Tape, Black Spacer Argon Filled</p> <p>Paint Finish</p> <table border="1"> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> </tr> </table>			Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Internal	Farrow & Ball - All White No.2005	External	Farrow & Ball - All White No.2005	Cill	Farrow & Ball - All White No.2005
	Internal Pane	Spacer	External Pane																		
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																		
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																		
Internal	Farrow & Ball - All White No.2005																				
External	Farrow & Ball - All White No.2005																				
Cill	Farrow & Ball - All White No.2005																				
Production Notes 45 x 645 x 1160		Installation Notes Installed: Internally Flat 7																			
211010133																					
Job Tracking Order received: 06-06-2024 Print date: 23-10-2024 Sold by: Robin Partridge Last modified by: Kieran Fyfe Surveyed by: Kieran Fyfe Last modified date: 23-10-2024																					

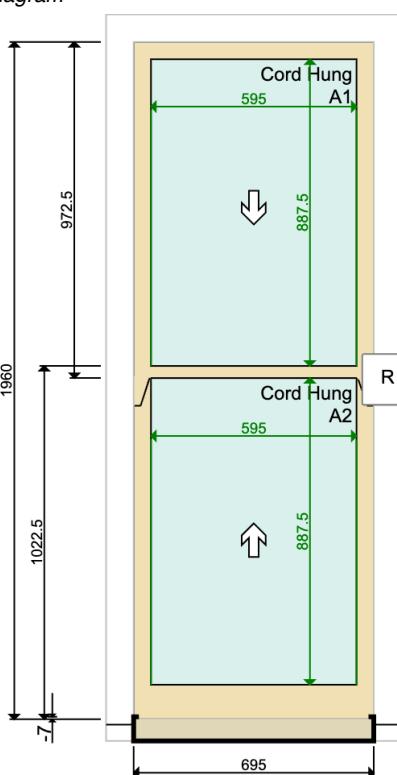
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Perryman	Job No N1465	Item No 19	Sheet 1 of 1									
Diagram		Sectional Details										
		<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> <p></p>										
Location First Floor LHS Unknown		<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>										
Material Solid Sapele Hardwood	Quantity 1 of shown on drawing											
Ironmongery 1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass	<p>Glazing</p> <table border="1"> <tr> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top 4mm Thermaglass Toughened</td> <td>10mm</td> <td> 4mm Float Toughened</td> </tr> <tr> <td>Btm 4mm Thermaglass Toughened</td> <td>10mm</td> <td> 4mm Float Toughened</td> </tr> </table> <p>Qwood Black Tape, Black Spacer Argon Filled</p>			Internal Pane	Spacer	External Pane	Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened
Internal Pane	Spacer	External Pane										
Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened										
Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened										
<p>Paint Finish</p> <table border="1"> <tr> <td>Internal Farrow & Ball - All White No.2005</td> <td></td> </tr> <tr> <td>External Farrow & Ball - All White No.2005</td> <td></td> </tr> <tr> <td>Cill Farrow & Ball - All White No.2005</td> <td></td> </tr> </table>			Internal Farrow & Ball - All White No.2005		External Farrow & Ball - All White No.2005		Cill Farrow & Ball - All White No.2005					
Internal Farrow & Ball - All White No.2005												
External Farrow & Ball - All White No.2005												
Cill Farrow & Ball - All White No.2005												
Production Notes *match existing horn - see notes 45 x 645 x 1960 Cill = 70 x 145 x 1100	<p>Installation Notes</p> <table border="1"> <tr> <td>Installed:</td> <td>Internally</td> </tr> <tr> <td>External Access:</td> <td>Scaffold by Customer</td> </tr> <tr> <td>Hazard Below:</td> <td>Pedestrians, Pavement</td> </tr> </table> <p>Flat 5 living room</p>			Installed:	Internally	External Access:	Scaffold by Customer	Hazard Below:	Pedestrians, Pavement			
Installed:	Internally											
External Access:	Scaffold by Customer											
Hazard Below:	Pedestrians, Pavement											
211010133												
<p>Job Tracking</p> <table border="1"> <tr> <td>Order received: 06-06-2024</td> <td>Print date: 23-10-2024</td> </tr> <tr> <td>Sold by: Robin Partridge</td> <td>Last modified by: Kieran Fyfe</td> </tr> <tr> <td>Surveyed by: Kieran Fyfe</td> <td>Last modified date: 23-10-2024</td> </tr> </table>				Order received: 06-06-2024	Print date: 23-10-2024	Sold by: Robin Partridge	Last modified by: Kieran Fyfe	Surveyed by: Kieran Fyfe	Last modified date: 23-10-2024			
Order received: 06-06-2024	Print date: 23-10-2024											
Sold by: Robin Partridge	Last modified by: Kieran Fyfe											
Surveyed by: Kieran Fyfe	Last modified date: 23-10-2024											

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Perryman	Job No N1465	Item No 20	Sheet 1 of 1															
Diagram		Sectional Details																
		<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> 																
Location First Floor LHS Unknown		<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>																
Material Solid Sapele Hardwood	Quantity 1 of shown on drawing																	
Ironmongery 1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass	<p>Glazing</p> <table border="1"> <tr> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top 4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm 4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> </table> <p>Qwood Black Tape, Black Spacer Argon Filled</p> <p>Paint Finish</p> <table border="1"> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> </tr> </table>			Internal Pane	Spacer	External Pane	Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Internal	Farrow & Ball - All White No.2005	External	Farrow & Ball - All White No.2005	Cill	Farrow & Ball - All White No.2005
Internal Pane	Spacer	External Pane																
Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened																
Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened																
Internal	Farrow & Ball - All White No.2005																	
External	Farrow & Ball - All White No.2005																	
Cill	Farrow & Ball - All White No.2005																	
Production Notes *match existing horn - see notes 45 x 695 x 1960 Cill = 70 x 145 x 1100		Installation Notes Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 5 living room																
211010133																		
Job Tracking Order received: 06-06-2024 Print date: 23-10-2024 Sold by: Robin Partridge Last modified by: Kieran Fyfe Surveyed by: Kieran Fyfe Last modified date: 23-10-2024																		

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	21	Sheet	1 of 1												
Diagram					Sectional Details														
				<p>Sash Head 55 mm Sash Stile 50 mm Sash Btm Rail (ext) 120 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> 															
Location	Ground Floor LHS Unknown				<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>														
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p>															
<p>Ironmongery 1 x Rola Sash Stops - TBC 1 x Sash Fastener - TBC 2 x Sash Lift - TBC 4 x Standard Pulley - TBC</p>				<p>Glazing <table border="1"> <thead> <tr> <th></th> <th>Internal Pane</th> <th>Spacer</th> <th>External Pane</th> </tr> </thead> <tbody> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> </tbody> </table> <p>Qwood Black Tape, Black Spacer Argon Filled</p> </p>					Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened
	Internal Pane	Spacer	External Pane																
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																
				<p>Paint Finish Internal Farrow & Ball - All White No.2005 External Farrow & Ball - All White No.2005 Cill Farrow & Ball - All White No.2005</p>															
<p>Production Notes 45 x 1025 x 2055</p>				<p>Installation Notes Installed: Internally Flat 2 bedroom</p>															
				<p>211010133</p>															
Job Tracking		<p>Order received: 06-06-2024 Print date: 23-10-2024 Sold by: Robin Partridge Last modified by: Kieran Fyfe Surveyed by: Kieran Fyfe Last modified date: 23-10-2024</p>																	

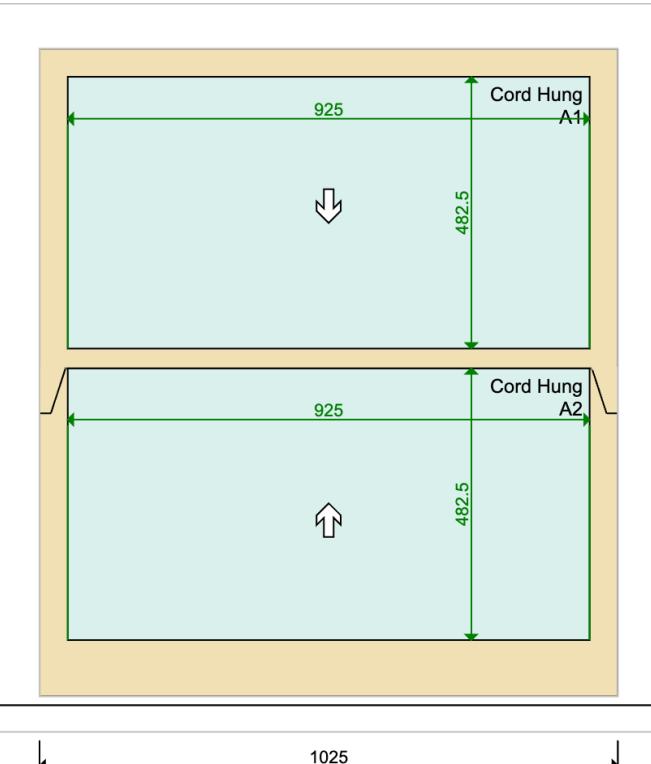
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	22	Sheet	1 of 1																						
Diagram					Sectional Details																								
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p>																									
Location	Second Floor Front Unknown				<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>																								
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p> <table> <tr> <td>Glazing</td> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td colspan="2">Qwood</td><td>Black Tape, Black Spacer</td><td>Argon Filled</td> </tr> </table> <p>Paint Finish</p> <table> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> </tr> </table>				Glazing	Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Qwood		Black Tape, Black Spacer	Argon Filled	Internal	Farrow & Ball - All White No.2005	External	Farrow & Ball - All White No.2005	Cill	Farrow & Ball - All White No.2005
Glazing	Internal Pane	Spacer	External Pane																										
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																										
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																										
Qwood		Black Tape, Black Spacer	Argon Filled																										
Internal	Farrow & Ball - All White No.2005																												
External	Farrow & Ball - All White No.2005																												
Cill	Farrow & Ball - All White No.2005																												
Production Notes	<p>*match existing horn - see notes 45 x 1025 x 1150</p>				<p>Installation Notes</p> <table> <tr> <td>Installed:</td> <td>Internally</td> </tr> <tr> <td>External Access:</td> <td>Scaffold by Customer</td> </tr> <tr> <td>Hazard Below:</td> <td>Pedestrians, Pavement</td> </tr> </table> <p>Flat 7 No repairs to frame</p>			Installed:	Internally	External Access:	Scaffold by Customer	Hazard Below:	Pedestrians, Pavement																
Installed:	Internally																												
External Access:	Scaffold by Customer																												
Hazard Below:	Pedestrians, Pavement																												
211010133																													
Job Tracking	<p>⚠ Order received: 06-06-2024 Sold by: Robin Partridge Surveyed by: Kieran Fyfe</p>				<p>Print date: 23-10-2024 Last modified by: Kieran Fyfe Last modified date: 23-10-2024</p>																								

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	23	Sheet	1 of 1									
Diagram					Sectional Details											
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> 												
Location	Second Floor Front Unknown				<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>											
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p>												
<p>Ironmongery 1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass</p>				<p>Glazing <table border="1"> <tr> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top 4mm Thermaglass Toughened</td> <td>10mm</td> <td> 4mm Float Toughened</td> </tr> <tr> <td>Btm 4mm Thermaglass Toughened</td> <td>10mm</td> <td> 4mm Float Toughened</td> </tr> </table> Qwood Black Tape, Black Spacer Argon Filled </p>				Internal Pane	Spacer	External Pane	Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened
Internal Pane	Spacer	External Pane														
Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened														
Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened														
				<p>Paint Finish Internal Farrow & Ball - All White No.2005 External Farrow & Ball - All White No.2005 Cill Farrow & Ball - All White No.2005</p>												
<p>Production Notes *match existing horn - see notes 45 x 1025 x 1150</p>				<p>Installation Notes Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 7 No repairs to frame</p>												
211010133																
Job Tracking 		Order received: 06-06-2024		Print date: 23-10-2024												
Sold by: Robin Partridge		Last modified by: Kieran Fyfe														
Surveyed by: Kieran Fyfe		Last modified date: 23-10-2024														

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	24	Sheet	1 of 1																										
Diagram					Sectional Details																												
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> 																													
Location	Second Floor Front Unknown				<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>																												
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p>																													
<p>Ironmongery 1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass</p>				<table border="1"> <thead> <tr> <th colspan="2">Glazing</th> <th>Internal Pane</th> <th>Spacer</th> <th>External Pane</th> </tr> </thead> <tbody> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> <td></td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> <td></td> </tr> <tr> <td colspan="2"></td><td colspan="2">Qwood</td><td>Black Tape, Black Spacer Argon Filled</td> </tr> </tbody> </table> <p>Paint Finish</p> <table> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> </tr> </table>				Glazing		Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened		Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened				Qwood		Black Tape, Black Spacer Argon Filled	Internal	Farrow & Ball - All White No.2005	External	Farrow & Ball - All White No.2005	Cill	Farrow & Ball - All White No.2005
Glazing		Internal Pane	Spacer	External Pane																													
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																														
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																														
		Qwood		Black Tape, Black Spacer Argon Filled																													
Internal	Farrow & Ball - All White No.2005																																
External	Farrow & Ball - All White No.2005																																
Cill	Farrow & Ball - All White No.2005																																
<p>Production Notes *match existing horn - see notes 45 x 1025 x 1150</p>				<p>Installation Notes</p> <table> <tr> <td>Installed:</td> <td>Internally</td> </tr> <tr> <td>External Access:</td> <td>Scaffold by Customer</td> </tr> <tr> <td>Hazard Below:</td> <td>Pedestrians, Pavement</td> </tr> <tr> <td colspan="2">Flat 7 Kitchen</td> </tr> <tr> <td colspan="2">No repairs to frame</td> </tr> </table>				Installed:	Internally	External Access:	Scaffold by Customer	Hazard Below:	Pedestrians, Pavement	Flat 7 Kitchen		No repairs to frame																	
Installed:	Internally																																
External Access:	Scaffold by Customer																																
Hazard Below:	Pedestrians, Pavement																																
Flat 7 Kitchen																																	
No repairs to frame																																	
211010133																																	
Job Tracking		<p>⚠ Order received: 06-06-2024 Sold by: Robin Partridge Surveyed by: Kieran Fyfe</p>																															
		<p>Print date: 23-10-2024 Last modified by: Kieran Fyfe Last modified date: 23-10-2024</p>																															

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	25	Sheet	1 of 1			
Diagram					Sectional Details					
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> 						
Location	Second Floor Front Unknown				<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>					
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p>						
<p>Ironmongery 1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass</p>				<p>Glazing Internal Pane Spacer External Pane Top 4mm Thermaglass Toughened 10mm 4mm Float Toughened Btm 4mm Thermaglass Toughened 10mm 4mm Float Toughened</p>						
				<p>Qwood Black Tape, Black Spacer Argon Filled</p>						
				<p>Paint Finish Internal Farrow & Ball - All White No.2005 External Farrow & Ball - All White No.2005 Cill Farrow & Ball - All White No.2005</p>						
<p>Production Notes *match existing horn - see notes 45 x 1025 x 1150 Cill = 70 x 145 x 1100</p>				<p>Installation Notes Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 7 Bedroom No repairs to frame</p>						
				<p>211010133</p>						
<p>Job Tracking </p>		<p>Order received: 06-06-2024 Print date: 23-10-2024 Sold by: Robin Partridge Last modified by: Kieran Fyfe Surveyed by: Kieran Fyfe Last modified date: 23-10-2024</p>								

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	26	Sheet	1 of 1												
Diagram					Sectional Details														
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> 															
Location	Second Floor Front Unknown				<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>														
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p>															
<p>Ironmongery 1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass</p>				<p>Glazing <table border="1"> <tr> <td></td> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> </table> Qwood Black Tape, Black Spacer Argon Filled </p>					Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened
	Internal Pane	Spacer	External Pane																
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																
				<p>Paint Finish Internal Farrow & Ball - All White No.2005 External Farrow & Ball - All White No.2005 Cill Farrow & Ball - All White No.2005</p>															
<p>Production Notes *match existing horn - see notes 45 x 1025 x 1150 Cill = 70 x 145 x 1100</p>				<p>Installation Notes Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 7 Bedroom No repairs to frame</p>															
211010133																			
Job Tracking 		Order received: 06-06-2024		Print date: 23-10-2024															
Sold by: Robin Partridge		Last modified by: Kieran Fyfe																	
Surveyed by: Kieran Fyfe		Last modified date: 23-10-2024																	

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	27	Sheet	1 of 1									
Diagram					Sectional Details											
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> 												
Location	First Floor Front Unknown															
Material	Solid Sapele Hardwood	Quantity	1	of shown on drawing												
Ironmongery 1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass				Glazing <table border="1"> <tr> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top 4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm 4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> </table> Qwood Black Tape, Black Spacer Argon Filled				Internal Pane	Spacer	External Pane	Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened
Internal Pane	Spacer	External Pane														
Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened														
Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened														
Paint Finish Internal Farrow & Ball - All White No.2005 External Farrow & Ball - All White No.2005 Cill Farrow & Ball - All White No.2005																
Production Notes *match existing horn - see notes 45 x 1025 x 1960 Cill = 70 x 145 x 1100				Installation Notes Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 5 living room												
211010133																
Job Tracking Order received: 06-06-2024 Sold by: Robin Partridge Surveyed by: Kieran Fyfe		Print date: 23-10-2024 Last modified by: Kieran Fyfe Last modified date: 23-10-2024														

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	28	Sheet	1 of 1												
Diagram					Sectional Details														
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p>															
Location	First Floor Front Unknown				Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm														
Material	Solid Sapele Hardwood	Quantity	1	of shown on drawing															
Ironmongery 1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass				Glazing <table border="1"> <tr> <td></td> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> </table> Qwood Black Tape, Black Spacer Argon Filled					Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened
	Internal Pane	Spacer	External Pane																
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																
				Paint Finish Internal Farrow & Ball - All White No.2005 External Farrow & Ball - All White No.2005 Cill Farrow & Ball - All White No.2005															
Production Notes *match existing horn - see notes 45 x 1025 x 1960 Cill = 70 x 145 x 1100				Installation Notes Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 5 living room															
				211010133															
Job Tracking		Order received: 06-06-2024		Print date: 23-10-2024															
Sold by: Robin Partridge		Last modified by: Kieran Fyfe																	
Surveyed by: Kieran Fyfe		Last modified date: 23-10-2024																	

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	29	Sheet	1 of 1																	
Diagram					Sectional Details																			
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p>																				
Location	First Floor Front Unknown				<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>																			
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p>																				
Ironmongery	<p>1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass</p>				<table border="1"> <thead> <tr> <th>Glazing</th> <th>Internal Pane</th> <th>Spacer</th> <th>External Pane</th> </tr> </thead> <tbody> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td colspan="2">Qwood</td><td>Black Tape, Black Spacer</td><td>Argon Filled</td> </tr> </tbody> </table>				Glazing	Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened	Qwood		Black Tape, Black Spacer	Argon Filled
Glazing	Internal Pane	Spacer	External Pane																					
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																					
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																					
Qwood		Black Tape, Black Spacer	Argon Filled																					
				<p>Paint Finish</p> <table border="1"> <tbody> <tr> <td>Internal</td> <td colspan="3">Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td colspan="3">Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td colspan="3">Farrow & Ball - All White No.2005</td> </tr> </tbody> </table>				Internal	Farrow & Ball - All White No.2005			External	Farrow & Ball - All White No.2005			Cill	Farrow & Ball - All White No.2005							
Internal	Farrow & Ball - All White No.2005																							
External	Farrow & Ball - All White No.2005																							
Cill	Farrow & Ball - All White No.2005																							
Production Notes	<p>*match existing horn - see notes 45 x 1025 x 1960 Cill = 70 x 145 x 1100</p>				<p>Installation Notes</p> <table border="1"> <tbody> <tr> <td>Installed:</td> <td colspan="2">Internally</td> </tr> <tr> <td>External Access:</td> <td colspan="2">Scaffold by Customer</td> </tr> <tr> <td>Hazard Below:</td> <td colspan="2">Pedestrians, Pavement</td> </tr> <tr> <td colspan="3">Flat 5 bath room</td></tr> </tbody> </table>			Installed:	Internally		External Access:	Scaffold by Customer		Hazard Below:	Pedestrians, Pavement		Flat 5 bath room							
Installed:	Internally																							
External Access:	Scaffold by Customer																							
Hazard Below:	Pedestrians, Pavement																							
Flat 5 bath room																								
				<p>211010133</p>																				
Job Tracking	<p>Order received: 06-06-2024 Sold by: Robin Partridge Surveyed by: Kieran Fyfe</p>				<p>Print date: 23-10-2024 Last modified by: Kieran Fyfe Last modified date: 23-10-2024</p>																			

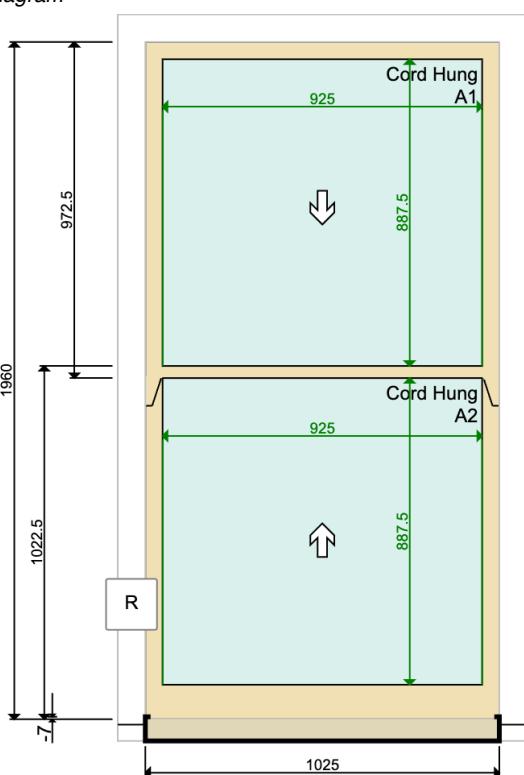
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	30	Sheet	1 of 1					
Diagram					Sectional Details							
				<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p>								
Location	First Floor Front Unknown				Glazing Bar	N/A						
Material	Solid Sapele Hardwood	Quantity	1	of shown on drawing	Profile	Ovolo						
Ironmongery				Glazing	Internal Pane	Spacer	External Pane					
1 x Fitch Fastener - Polished Brass 1 x Rola Sash Stops - Polished Brass 2 x Standard Lifter - Polished Brass 4 x Standard Pulley - Polished Brass				Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened					
				Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened					
				Qwood		Black Tape, Black Spacer	Argon Filled					
				Paint Finish								
				Internal	Farrow & Ball - All White No.2005							
				External	Farrow & Ball - All White No.2005							
				Cill	Farrow & Ball - All White No.2005							
Production Notes				Installation Notes								
*match existing horn - see notes 45 x 1020 x 1960				Installed:	Internally							
				External Access:	Scaffold by Customer							
				Hazard Below:	Pedestrians, Pavement							
				Flat 4 living room								
211010133												
Job Tracking												
Order received: 06-06-2024		Print date: 23-10-2024										
Sold by: Robin Partridge		Last modified by: Kieran Fyfe										
Surveyed by: Kieran Fyfe		Last modified date: 23-10-2024										

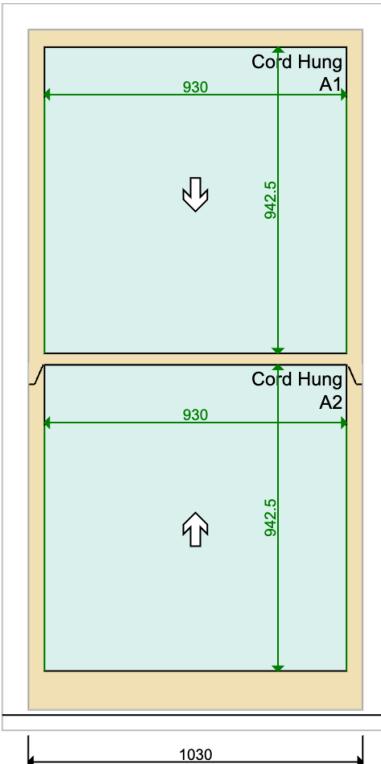
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Perryman	Job No N1465	Item No 31	Sheet 1 of 1															
Diagram		Sectional Details																
		<p>Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (ext) 100 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn As per not. 80 mm Btm Sash Horn No horn</p> <p></p>																
Location First Floor Front Unknown		<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>																
Material Solid Sapele Hardwood	Quantity 1 of shown on drawing	<p>Glazing</p> <table border="1"> <tr> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> </tr> <tr> <td>Top 4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> <tr> <td>Btm 4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> </tr> </table> <p>Qwood Black Tape, Black Spacer Argon Filled</p> <p>Paint Finish</p> <table border="1"> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> </tr> </table>		Internal Pane	Spacer	External Pane	Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened	Internal	Farrow & Ball - All White No.2005	External	Farrow & Ball - All White No.2005	Cill	Farrow & Ball - All White No.2005
Internal Pane	Spacer	External Pane																
Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened																
Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened																
Internal	Farrow & Ball - All White No.2005																	
External	Farrow & Ball - All White No.2005																	
Cill	Farrow & Ball - All White No.2005																	
Production Notes *match existing horn - see notes 45 x 1025 x 1960		Installation Notes Installed: Internally External Access: Scaffold by Customer Hazard Below: Pedestrians, Pavement Flat 4 living room																
211010133																		
Job Tracking Order received: 06-06-2024 Print date: 23-10-2024 Sold by: Robin Partridge Last modified by: Kieran Fyfe Surveyed by: Kieran Fyfe Last modified date: 23-10-2024																		

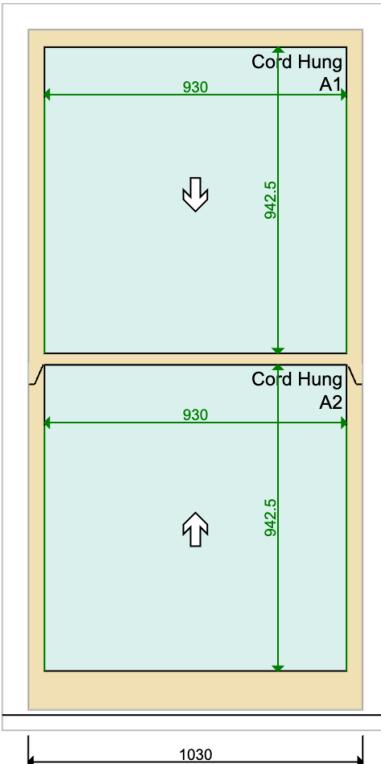
JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	32	Sheet	1 of 1																												
Diagram					Sectional Details																														
				<table> <tr> <td>Sash Head</td> <td>55 mm</td> <td></td> <td></td> </tr> <tr> <td>Sash Stile</td> <td>50 mm</td> <td></td> <td></td> </tr> <tr> <td>Sash Btm Rail (ext)</td> <td>120 mm</td> <td>Chamfered</td> <td></td> </tr> <tr> <td>Sash Midrail</td> <td>35 mm</td> <td></td> <td></td> </tr> <tr> <td>Sash Thickness</td> <td>45 mm</td> <td></td> <td></td> </tr> <tr> <td>Top Sash Horn</td> <td>Type H</td> <td>60 mm</td> <td></td> </tr> <tr> <td>Btm Sash Horn</td> <td>No horn</td> <td></td> <td></td> </tr> </table>				Sash Head	55 mm			Sash Stile	50 mm			Sash Btm Rail (ext)	120 mm	Chamfered		Sash Midrail	35 mm			Sash Thickness	45 mm			Top Sash Horn	Type H	60 mm		Btm Sash Horn	No horn		
Sash Head	55 mm																																		
Sash Stile	50 mm																																		
Sash Btm Rail (ext)	120 mm	Chamfered																																	
Sash Midrail	35 mm																																		
Sash Thickness	45 mm																																		
Top Sash Horn	Type H	60 mm																																	
Btm Sash Horn	No horn																																		
																																			
Location	Ground Floor Front Unknown				Glazing Bar	N/A																													
Material	Solid Sapele Hardwood		Quantity	1	Profile	Ovolo																													
				Glazing Rebate 16 x 33 mm																															
Ironmongery					Glazing																														
1 x Rola Sash Stops - TBC					Internal Pane	Spacer	External Pane																												
1 x Sash Fastener - TBC					Top 4mm Thermaglass Toughened	10mm	4mm Float Toughened																												
2 x Sash Lift - TBC					Btm 4mm Thermaglass Toughened	10mm	4mm Float Toughened																												
4 x Standard Pulley - TBC					Qwood	Black Tape, Black Spacer	Argon Filled																												
				Paint Finish																															
				Internal	Farrow & Ball - All White No.2005																														
				External	Farrow & Ball - All White No.2005																														
				Cill	Farrow & Ball - All White No.2005																														
Production Notes				Installation Notes																															
45 x 1030 x 2095				Installed:	Internally																														

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Perryman	Job No	N1465	Item No	33	Sheet	1 of 1																												
Diagram					Sectional Details																														
				<table> <tr> <td>Sash Head</td> <td>55 mm</td> <td></td> <td></td> </tr> <tr> <td>Sash Stile</td> <td>50 mm</td> <td></td> <td></td> </tr> <tr> <td>Sash Btm Rail (ext)</td> <td>120 mm</td> <td>Chamfered</td> <td></td> </tr> <tr> <td>Sash Midrail</td> <td>35 mm</td> <td></td> <td></td> </tr> <tr> <td>Sash Thickness</td> <td>45 mm</td> <td></td> <td></td> </tr> <tr> <td>Top Sash Horn</td> <td>Type H</td> <td>60 mm</td> <td></td> </tr> <tr> <td>Btm Sash Horn</td> <td>No horn</td> <td></td> <td></td> </tr> </table>				Sash Head	55 mm			Sash Stile	50 mm			Sash Btm Rail (ext)	120 mm	Chamfered		Sash Midrail	35 mm			Sash Thickness	45 mm			Top Sash Horn	Type H	60 mm		Btm Sash Horn	No horn		
Sash Head	55 mm																																		
Sash Stile	50 mm																																		
Sash Btm Rail (ext)	120 mm	Chamfered																																	
Sash Midrail	35 mm																																		
Sash Thickness	45 mm																																		
Top Sash Horn	Type H	60 mm																																	
Btm Sash Horn	No horn																																		
																																			
Location	Ground Floor Front Unknown				<table> <tr> <td>Glazing Bar</td> <td>N/A</td> <td></td> </tr> <tr> <td>Profile</td> <td>Ovolo</td> <td></td> </tr> <tr> <td>Glazing Rebate</td> <td>16 x 33 mm</td> <td></td> </tr> </table>			Glazing Bar	N/A		Profile	Ovolo		Glazing Rebate	16 x 33 mm																				
Glazing Bar	N/A																																		
Profile	Ovolo																																		
Glazing Rebate	16 x 33 mm																																		
Material	Solid Sapele Hardwood	Quantity	1	<table> <tr> <td>of shown on drawing</td> <td></td> <td></td> <td></td> </tr> </table>				of shown on drawing																											
of shown on drawing																																			
Ironmongery	<table> <tr> <td>1 x Rola Sash Stops - TBC</td> <td>Glazing</td> <td>Internal Pane</td> <td>Spacer</td> <td>External Pane</td> <td></td> <td></td> </tr> <tr> <td>1 x Sash Fastener - TBC</td> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> <td></td> <td></td> </tr> <tr> <td>2 x Sash Lift - TBC</td> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> <td></td> <td></td> </tr> <tr> <td>4 x Standard Pulley - TBC</td> <td>Qwood</td> <td></td> <td>Black Tape, Black Spacer</td> <td></td> <td>Argon Filled</td> <td></td> </tr> </table>							1 x Rola Sash Stops - TBC	Glazing	Internal Pane	Spacer	External Pane			1 x Sash Fastener - TBC	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened			2 x Sash Lift - TBC	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened			4 x Standard Pulley - TBC	Qwood		Black Tape, Black Spacer		Argon Filled	
1 x Rola Sash Stops - TBC	Glazing	Internal Pane	Spacer	External Pane																															
1 x Sash Fastener - TBC	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																															
2 x Sash Lift - TBC	Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																															
4 x Standard Pulley - TBC	Qwood		Black Tape, Black Spacer		Argon Filled																														
				<table> <tr> <td>Paint Finish</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> </table>				Paint Finish				Internal	Farrow & Ball - All White No.2005			External	Farrow & Ball - All White No.2005			Cill	Farrow & Ball - All White No.2005														
Paint Finish																																			
Internal	Farrow & Ball - All White No.2005																																		
External	Farrow & Ball - All White No.2005																																		
Cill	Farrow & Ball - All White No.2005																																		
Production Notes	<p>45 x 1030 x 2095</p>																																		
				<p>Installation Notes</p> <p>Installed: Internally</p>																															
211010133																																			
Job Tracking																																			
Order received: 06-06-2024		Print date: 23-10-2024																																	
Sold by: Robin Partridge		Last modified by: Kieran Fyfe																																	
Surveyed by: Kieran Fyfe		Last modified date: 23-10-2024																																	

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

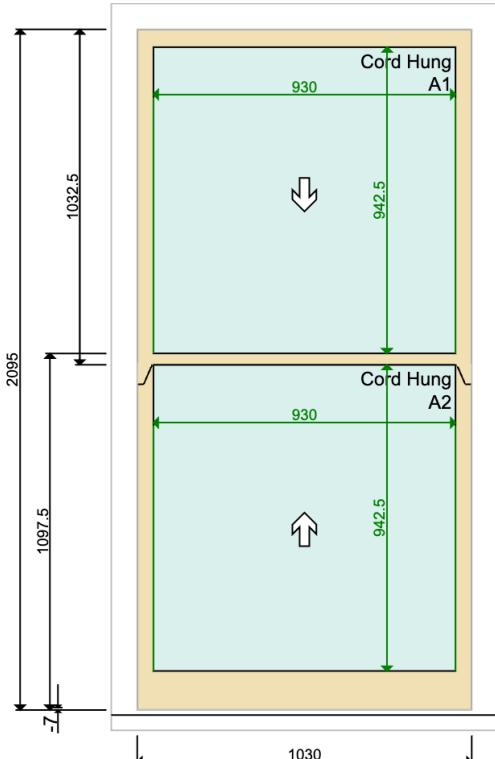
Customer	Perryman	Job No	N1465	Item No	34	Sheet	1 of 1																				
Diagram					Sectional Details																						
				<p>Sash Head 55 mm Sash Stile 50 mm Sash Btm Rail (ext) 120 mm Chamfered Sash Midrail 35 mm Sash Thickness 45 mm Top Sash Horn Type H 60 mm Btm Sash Horn No horn</p> 																							
Location	Ground Floor Front Unknown				<p>Glazing Bar N/A Profile Ovolo Glazing Rebate 16 x 33 mm</p>																						
Material	Solid Sapele Hardwood	Quantity	1	<p>of shown on drawing</p>																							
Ironmongery	<p>1 x Rola Sash Stops - TBC 1 x Sash Fastener - TBC 2 x Sash Lift - TBC 4 x Standard Pulley - TBC</p>																										
				<table border="1"> <thead> <tr> <th colspan="2">Glazing</th> <th>Internal Pane</th> <th>Spacer</th> <th>External Pane</th> </tr> </thead> <tbody> <tr> <td>Top</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> <td></td> </tr> <tr> <td>Btm</td> <td>4mm Thermaglass Toughened</td> <td>10mm</td> <td>4mm Float Toughened</td> <td></td> </tr> <tr> <td colspan="2"></td><td colspan="2" rowspan="2">Qwood</td><td>Black Tape, Black Spacer Argon Filled</td> </tr> </tbody> </table>				Glazing		Internal Pane	Spacer	External Pane	Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened		Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened				Qwood		Black Tape, Black Spacer Argon Filled
Glazing		Internal Pane	Spacer	External Pane																							
Top	4mm Thermaglass Toughened	10mm	4mm Float Toughened																								
Btm	4mm Thermaglass Toughened	10mm	4mm Float Toughened																								
		Qwood		Black Tape, Black Spacer Argon Filled																							
				<table border="1"> <thead> <tr> <th colspan="2">Paint Finish</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>Internal</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> <tr> <td>External</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> <tr> <td>Cill</td> <td>Farrow & Ball - All White No.2005</td> <td></td> <td></td> </tr> </tbody> </table>				Paint Finish				Internal	Farrow & Ball - All White No.2005			External	Farrow & Ball - All White No.2005			Cill	Farrow & Ball - All White No.2005						
Paint Finish																											
Internal	Farrow & Ball - All White No.2005																										
External	Farrow & Ball - All White No.2005																										
Cill	Farrow & Ball - All White No.2005																										
Production Notes	<p>45 x 1030 x 2095</p>																										
				Installation Notes																							
				<p>Installed: Internally Vertical Sliding SDG: Remove and Dispose</p>																							
211010133																											
Job Tracking	<p>Order received: 06-06-2024 Sold by: Robin Partridge Surveyed by: Kieran Fyfe</p>																										
				<p>Print date: 23-10-2024 Last modified by: Kieran Fyfe Last modified date: 23-10-2024</p>																							

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

<i>Customer</i>	<i>Job No</i>	<i>Item No</i>	<i>Sheet</i>
Perryman	N1465	35	1 of 1

Diagram



Sectional Details

Sash Head	55 mm
Sash Stile	50 mm
Sash Btm Rail (ext)	120 mm
Sash Midrail	35 mm
Sash Thickness	45 mm
Top Sash Horn	Type H
Btm Sash Horn	No horn



Location

Ground Floor Front Unknown

Material	Solid Sapele Hardwood	Quantity	1
			of shown on drawing

Glazing Bar	N/A
Profile	Ovolo
Glazing Rebate	16 x 33 mm

Ironmongery
1 x Rola Sash Stops - TBC
1 x Sash Fastener - TBC
2 x Sash Lift - TBC
4 x Standard Pulley - TBC

Glazing		Internal Pane	Spacer	External Pane
Top	4mm Thermaglass Toughened		10mm	4mm Float Toughened
Btm	4mm Thermaglass Toughened		10mm	4mm Float Toughened

Qwood	Black Tape, Black Spacer	Argon Filled
<i>Paint Finish</i>		
Internal	Farrow & Ball - All White No.2005	
External	Farrow & Ball - All White No.2005	
Cill	Farrow & Ball - All White No 2005	

Production Notes

45 x 1030 x 2095

Installation Notes

Installed: Internally
Vertical Sliding SDG: Remove and Dispose

2 | 10 | 0 | 33

Job Tracking

Order received: 06-06-2024

Print date: 23-10-2024

Sold by: Robin Partridge

Last modified by: Kieran Eysel

Sold by: Robin Partridge
Surveyed by: Kieran Eycott

Last modified by: Kieran Fyle
Last modified date: 23.10.2024