


Parham Red Stock



Ibstock
At the heart of building

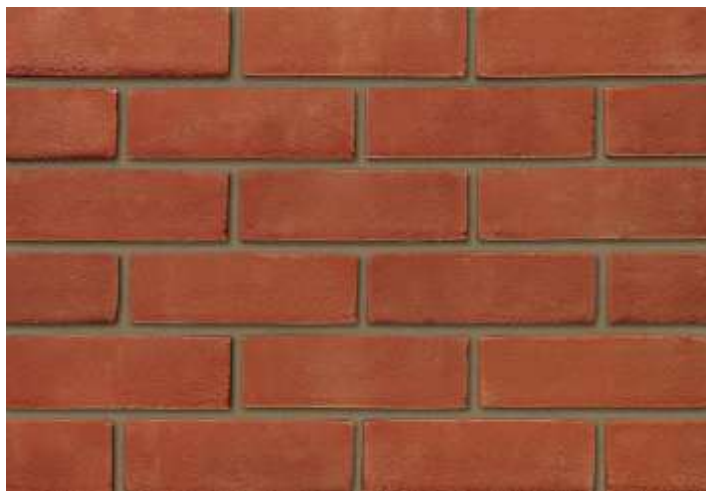

Product Information

Ibstock Code:	0821
Type:	Stock
Facing Description:	Sandfaced
Dry Brick Weight (kg):	2.2kg
Pack Quantity:	500
Packaging (standard):	Banded(plastic) & Shrinkwrapped
Factory:	Eclipse

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Single Frog
Voids (%):	8-13
Compressive Strength (N/mm ²):	20
Active Soluble Salts:	S2
Water Absorption (% weight):	19
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m ³):	1530
Equivalent Thermal Conductivity "K" value 5% Exposed:	Refer to Ibstock
Initial Rate of Absorption (Suction Rate) (Kg/m ² /min):	Refer to Ibstock
EAN:	5036335198889