Duo Modern Interlocking Roof Tile

Looking for a local Marley specialist?



All the performance benefits of the popular Marley Modern, but with the look of a small format slate.

- Mock-bond for a small format appearance
- Excellent covering capacity
- Can achieve an A+ rating in the BRE Green Guide to Specification
- Certified Excellent for BES 6001

Marley products brochure

Request sample


Compatibility, functionality and beautiful aesthetics for the perfect finish across every roof style

Our extensive range of roof fittings and accessories work with all elements of the full Marley Roof System, ensuring product specification and installation is quicker and easier. What's more, a complete Marley Roof System comes with a 15 year guarantee for further security and peace of mind. Take a look at our full range of roof fittings and accessories.

Explore roof fittings

2 colours that offer the choice between traditional and modern aesthetics.

Smooth Grey

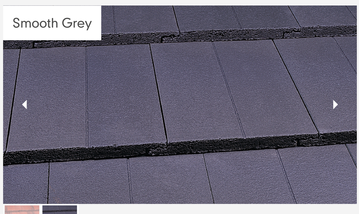

Experiencing the vast variety of textures and colours that our roof tiles provide up close, can guide you in the decision making process when selecting roof coverings. Our efficient sample service can help you in this process.

Request sample

All of our concrete interlocking tiles can achieve an 'A+' rating (which has the lowest environmental impact) in the Building Research Establishment's Green Guide to Specification.

Accreditation to the BES 6001 framework standard for 'Responsible Sourcing' means that projects using our concrete interlocking slates can now achieve extra credits under BREEAM and the Home Quality Mark (HQM). Click here to find out more.

To ensure that your roof is compliant with the new standard, our fixing specification service is available.

Duo Modern interlocking tile is designed to look like and blend in with the small format slates found in many regions.

Technical Specification

Size of Tile	420mm x 330mm
Minimum Pitch	22.5° Smooth (75mm headlap) 17.5° Smooth (100mm headlap) 30° Granular (75mm headlap) 25° Granular (100mm headlap)
Maximum Pitch	90°
Minimum Headlap	75mm
Maximum Gauge	345mm
Cover Width	292mm (nominal)
Covering Capacity	9.9 tiles /m² at 75mm headlap 10.7 tiles /m² at 100mm headlap
Weight of Tiling	50kg/m² (0.49 Kn/m²) at 75mm headlap 54kg/m² (0.53 Kn/m²) at 100mm headlap
Battens Required	2.9 lin.m/m² at 75mm headlap 3.1 lin.m/m² at 100mm headlap
Batten Size Recommended	38x 25mm for rafters/supports not exceeding 450mm centres 50 x 25mm for rafters/supports not exceeding 600mm centres
Tile Nails	50mm x 3.35mm
Hanging length	397mm (nominal)
Notes	The effectiveness of the tile or slate to operate at the minimum recommended pitch and lap may be influenced by special circumstances. Guidance on pitch and lap should be obtained from the Technical Advisory Service for the following: • Interlocking tiles and slates where the roof slope exceeds 6 metres in length and/or the site is rated to be in a severe exposure category. • Double-lap fibre cement slates where the roof slope exceeds 6 metres in length (severe/very severe exposure) and 9 metres in length (sheltered/moderate exposure). Nominal weight of roof tile fittings


We're here to help...

Request a fixing specification, estimate and NBS

Download BIM and CAD details

Read through our resources

Read all of our blogs here



Find a Marley stockist!

A network of merchant partners on hand to help you


2020 Roofing product catalogue

Download our full product guide




Related Products

Take a look at some other products similar to Duo Modern Interlocking Tile









Looking for a specialist?

If you would like to speak to somebody about including this product on your project, fill in the postcode and your local's contact details will appear.

Enter Postcode