


Internal Flush Doors



Lock Block


A lock block is not included on this door as it is a solid construction. The lock can be fitted in any location on either side.

DIF07** / DIF02** Ash Veneer FD30

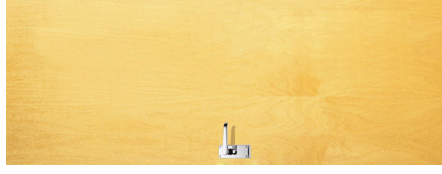

High quality, natural timber veneer and concealed timber lippings make this door a smart choice for many types of interior.

- Constructed using softwood timber stiles and rails frame
- Face fully lacquered
- Doors must be sealed on all edges prior to installation
- Lipped on two long edges
- All fire doors must be fitted in accordance with the fire certificate

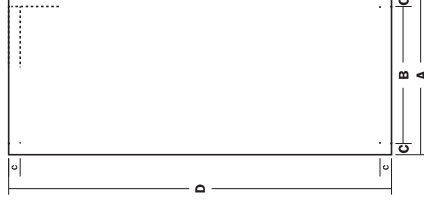

Dimensions						
Door Width	2'0"	2'3"	2'6"	2'9"	726mm	926mm
Product Code	DIF0730	DIF0740	DIF0760	DIF0770	DIF0230	DIF0240
Building Regulations	E	E	E	E, M	E	E, M
Thickness (mm)	44	44	44	44	44	44
Weights (kg)	24	27	30	33	28	33
A = width (mm)	610	686	762	838	726	826
B = width - stiles (mm)	556	632	708	784	672	772
C = stile / outer rail (mm)	27	27	27	27	27	27
D = height (mm)	1981	1981	1981	1981	2040	2040
E = inner rail (mm)	38	38	38	38	38	38

All sizes subject to standard industry tolerances
Part M Doors (M) - Mobility and Access
Part E Doors (E) - Reduction of Sound Travel



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE