


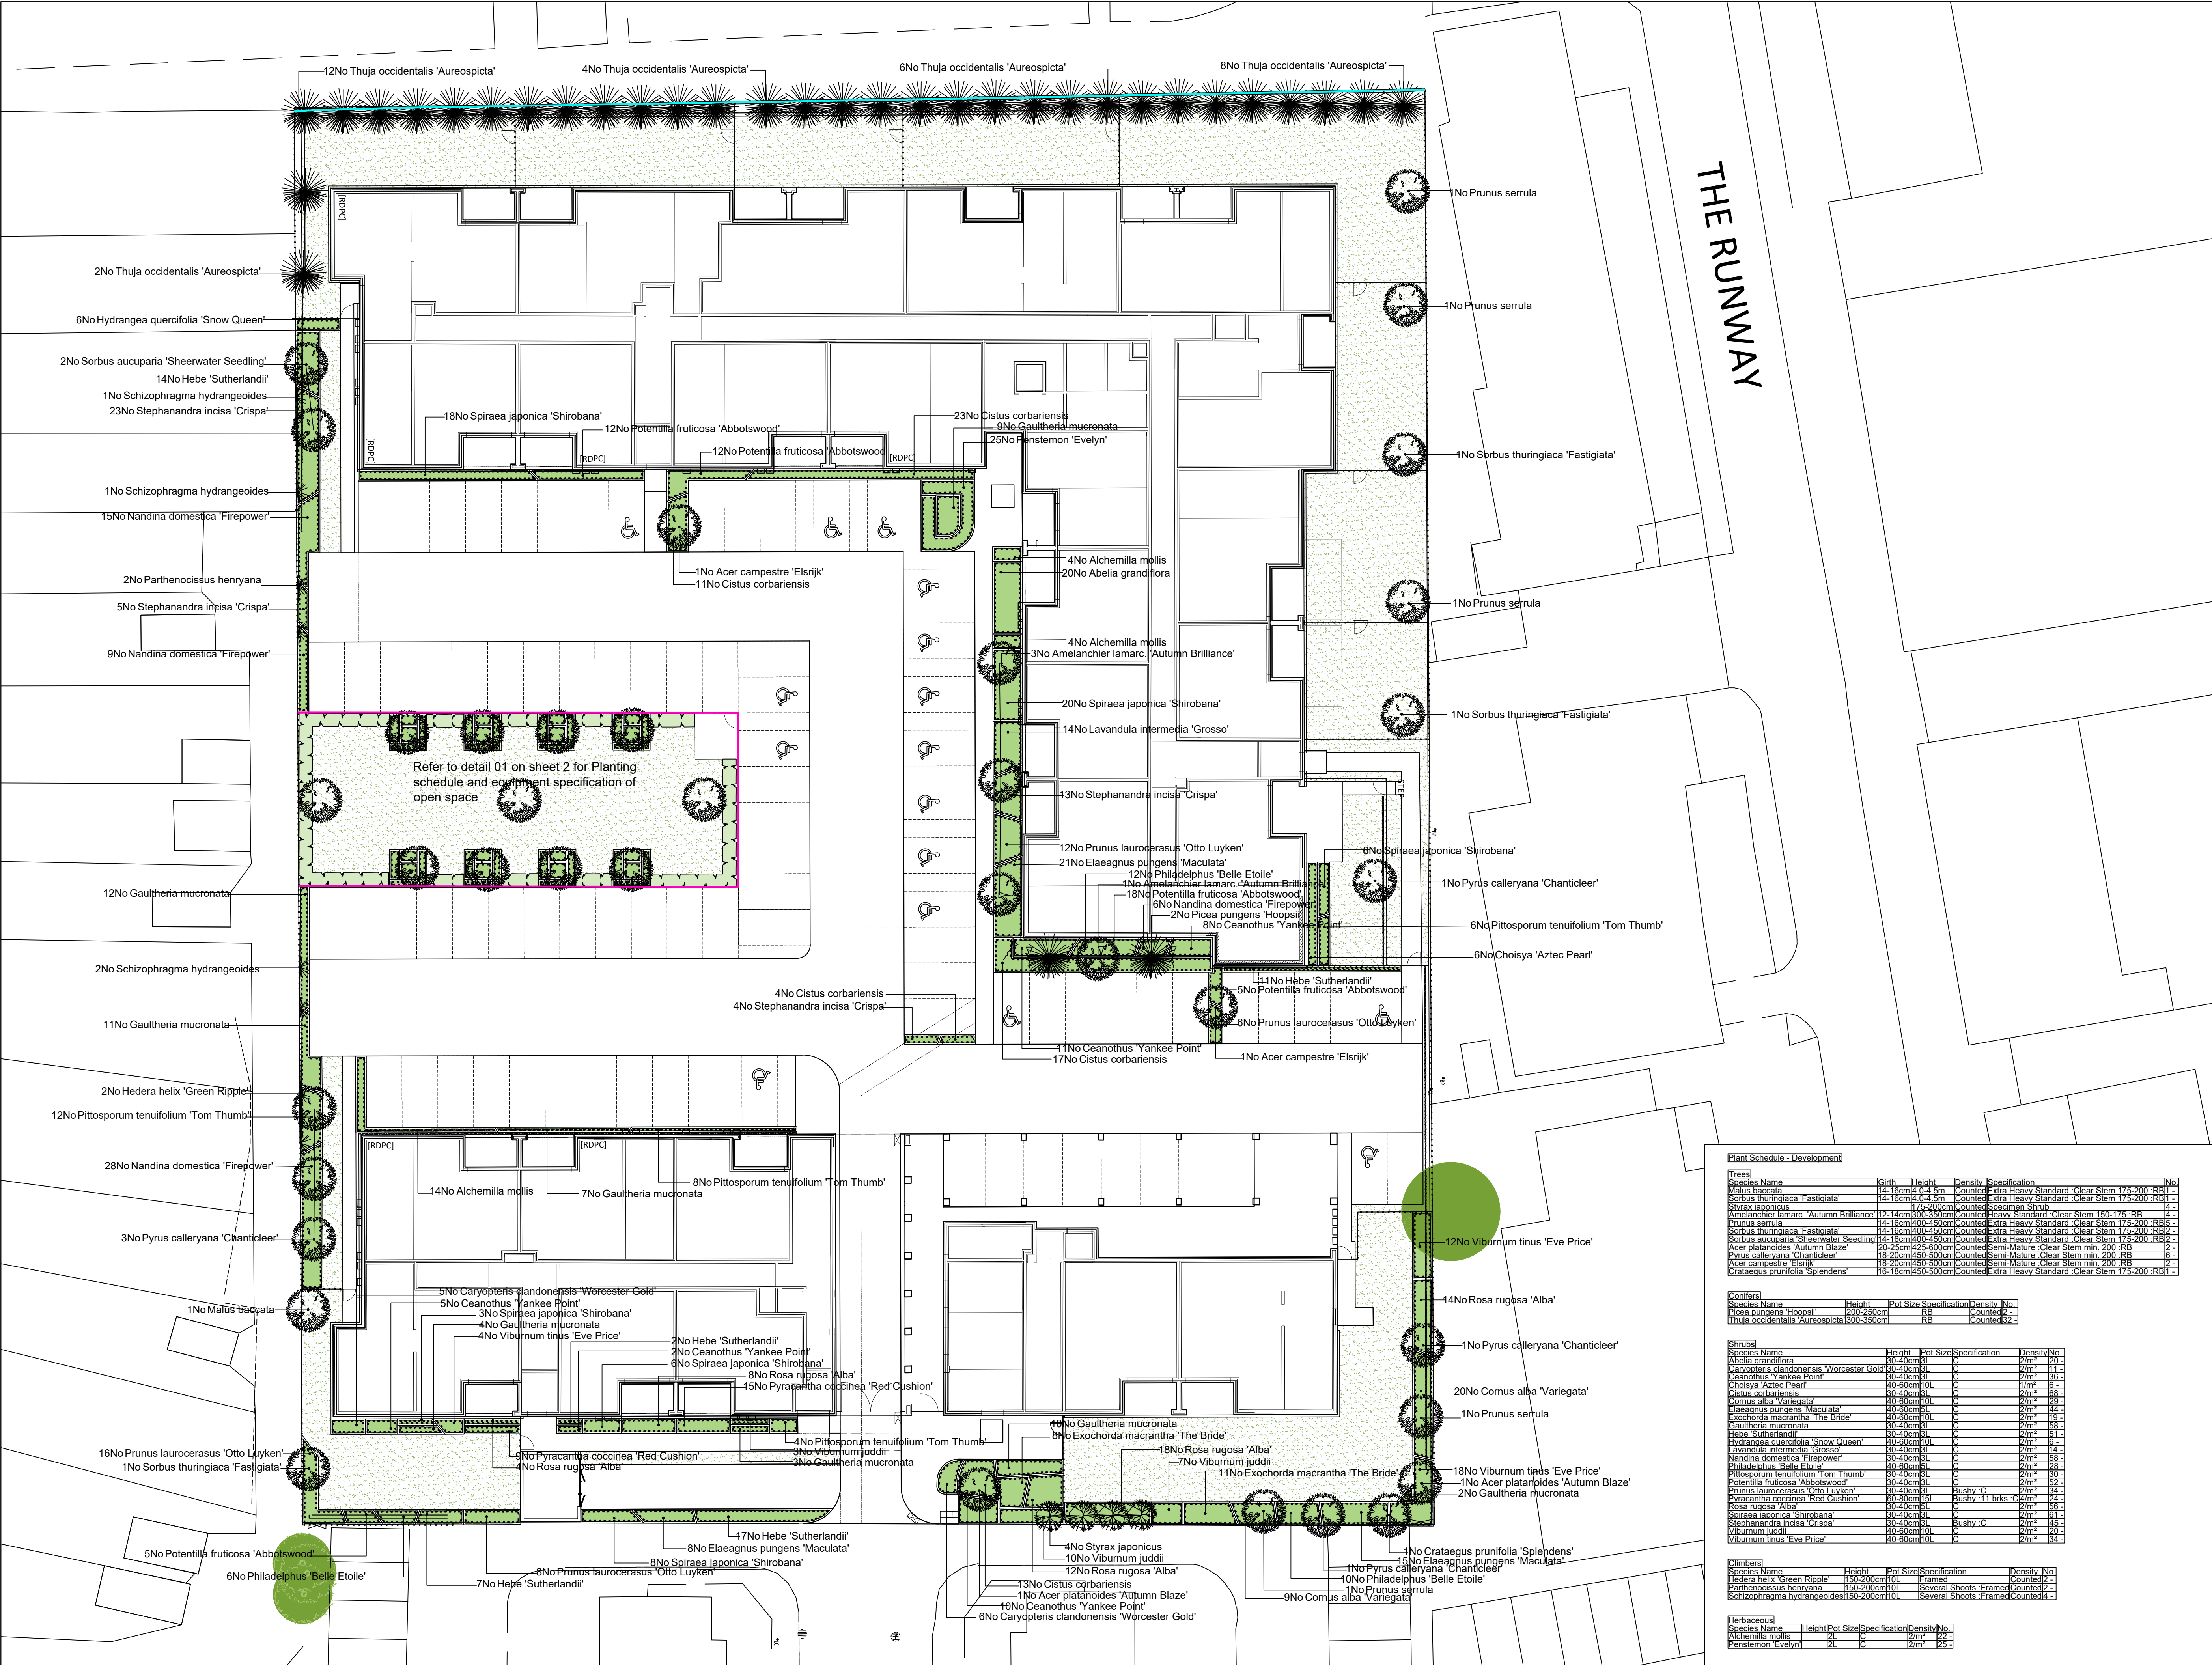

THE RUNWAY

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTES:
DO NOT SCALE FROM DRAWING
NOT FOR CONSTRUCTION, FOR PLANNING PURPOSES ONLY

For open space proposals and planting schedule and tree pit details refer to Sheet 2

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within hard landscape. See detail A1 A2 on sheet 2
- Proposed tree planting within soft landscape. See detail B1 B2 on sheet 2
- Proposed coniferous tree planting within soft landscape. See detail C1 C2 on sheet 2
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties
- Proposed climbing plants to be trained up adjacent wall/ fence with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1.2m height
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed benches to be Broxap Ingleby fixed bench seat - 2040x480x440
Bin to be Okehampton redwood litter bin
- Proposed bonded rubber mulch in green as supplied by Play Bark or similar

