

Wall Mount Standard Series (High Efficiency &amp; Comfort)

# ASYG12KMCC

## Features



- Slim and stylish square design
- Outstanding energy-saving performance
- Smart device control (optional)
- Comfortable airflow and quiet operation
- Smart device control (optional)

## Feature Icons



## Capacity

3.4 kW

4.0 kW

Find a Distributor In Your Country



Indoor Unit :  
ASYG12KMCC

Download :  
[Catalogues](#)

Outdoor Unit :  
AOYG12KMCC

By clicking "Accept All Cookies", you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

[Cookies Settings](#)

[Reject All](#)

[Accept All Cookies](#)

## Specifications

	<b>Phase</b>	Single phase	
<b>Power Source</b>	<b>Voltage</b>	230 V	
	<b>Frequency</b>	50 Hz	
<b>Capacity</b>	<b>Cooling</b>	3.4 (0.9 - 3.9) kW	
	<b>Heating</b>	4.0 (0.9 - 5.3) kW	
<b>Input Power</b>	<b>Cooling</b>	0.935 kW	
	<b>Heating</b>	0.960 kW	
<b>EER</b>	<b>Cooling</b>	3.65 W/W	
<b>COP</b>	<b>Heating</b>	4.17 W/W	
<b>Pdesign</b>	<b>Cooling</b>	3.4 kW	
	<b>Heating (-10°C)</b>	2.5 kW	
<b>SEER</b>	<b>Cooling</b>	7.30 W/W	
<b>SCOP</b>	<b>Heating (Average)</b>	4.40 W/W	
<b>Energy Efficiency Class</b>	<b>Cooling</b>	A++	
	<b>Heating (Average)</b>	A+	
<b>Max. Operating Current</b>	<b>Cooling</b>	6.5 A	
	<b>Heating</b>	9.0 A	
<b>Annual Energy Consumption</b>	<b>Cooling</b>	163 kWh/a	
	<b>Heating</b>	795 kWh/a	
<b>Moisture Removal</b>		1.8 l/h	
<b>Sound Pressure Level<sup>*2</sup></b>	<b>Indoor (Cooling)</b>	<b>High</b>	40 dB(A)
		<b>Middle</b>	35 dB(A)
		<b>Low</b>	30 dB(A)
		<b>Quiet</b>	20 dB(A)
	<b>Indoor (Heating)</b>	<b>High</b>	42 dB(A)
		<b>Middle</b>	38 dB(A)
		<b>Low</b>	33 dB(A)

By clicking "Accept All Cookies", you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.


	Indoor (Heating)	High	58 dB(A)
	Outdoor (Cooling)	High	65 dB(A)
	Outdoor (Heating)	High	65 dB(A)
Airflow Rate	Indoor (Cooling)	High	700 m <sup>3</sup> /h
	Outdoor (Cooling)	High	1700 m <sup>3</sup> /h
Net Dimensions Indoor	Height		270 mm
	Width		834 mm
	Depth		222 mm
Net Dimensions Outdoor	Height		541 mm
	Width		663 mm
	Depth		290 mm
Net Weight	Indoor		10.0 kg
	Outdoor		25.0 kg
Connection Pipe Diameter	Liquid		φ6.35 mm
	Gas		φ9.52 mm
Drain Hose Diameter		φ11.8(I.D.) φ15 to φ16.8(O.D.) mm	
Max. Pipe Length (Pre Charge)		20 (15.0) m	
Max. Height Difference		15 m	
Operation Range	Cooling		-10 to 46 °C DB
	Heating		-15 to 24 °C DB
Refrigerant	Type		R32
	Global Warming Potential		675
	Charge		700 g (0.473 CO <sub>2</sub> eq-T)

## Dimensions

By clicking "Accept All Cookies", you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

## Indoor Unit : ASYG12KMCC

Unit: mm

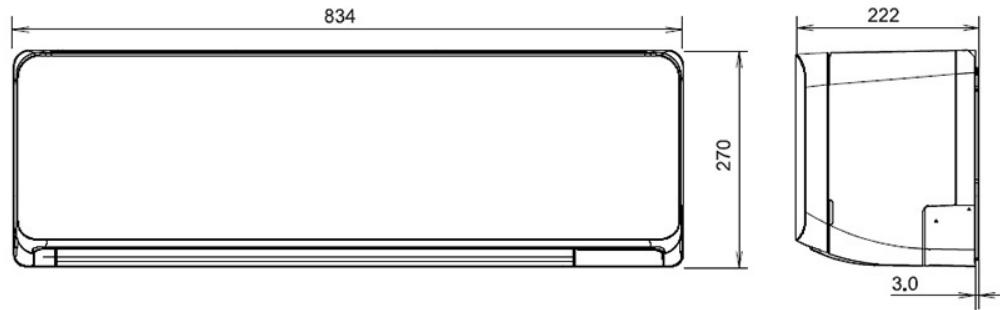

Service &amp; Support



FAQ



Download



Distributor



Contact Us

## PRODUCTS

- Split Systems
- Multi-split Systems
- AIRSTAGE VRF Systems
- Ventilation
- WATERSTAGE™ ATW Systems
- AIRSTAGE Mobile app - Global site
- FGlair app - Global site
- Smart Speaker

## SERVICE &amp; SUPPORT

- Downloads
- FAQ

## FIND A DISTRIBUTOR IN YOUR COUNTRY

## INFORMATION FROM FUJITSU GENERAL

## COMPANY

- President's message
- Corporate Profile
- Business Overview
- Environment
- Quality Control
- Patents and Technology
- Procurement
- News: Press Release

## GROUP COMPANIES IN EUROPE

- FUJITSU GENERAL (EURO) GmbH
- FUJITSU GENERAL AIR CONDITIONING (UK) LIMITED
- FUJITSU GENERAL (ITALIA) S.p.A
- FUJITSU GENERAL SOUTH EAST EUROPE S.A.