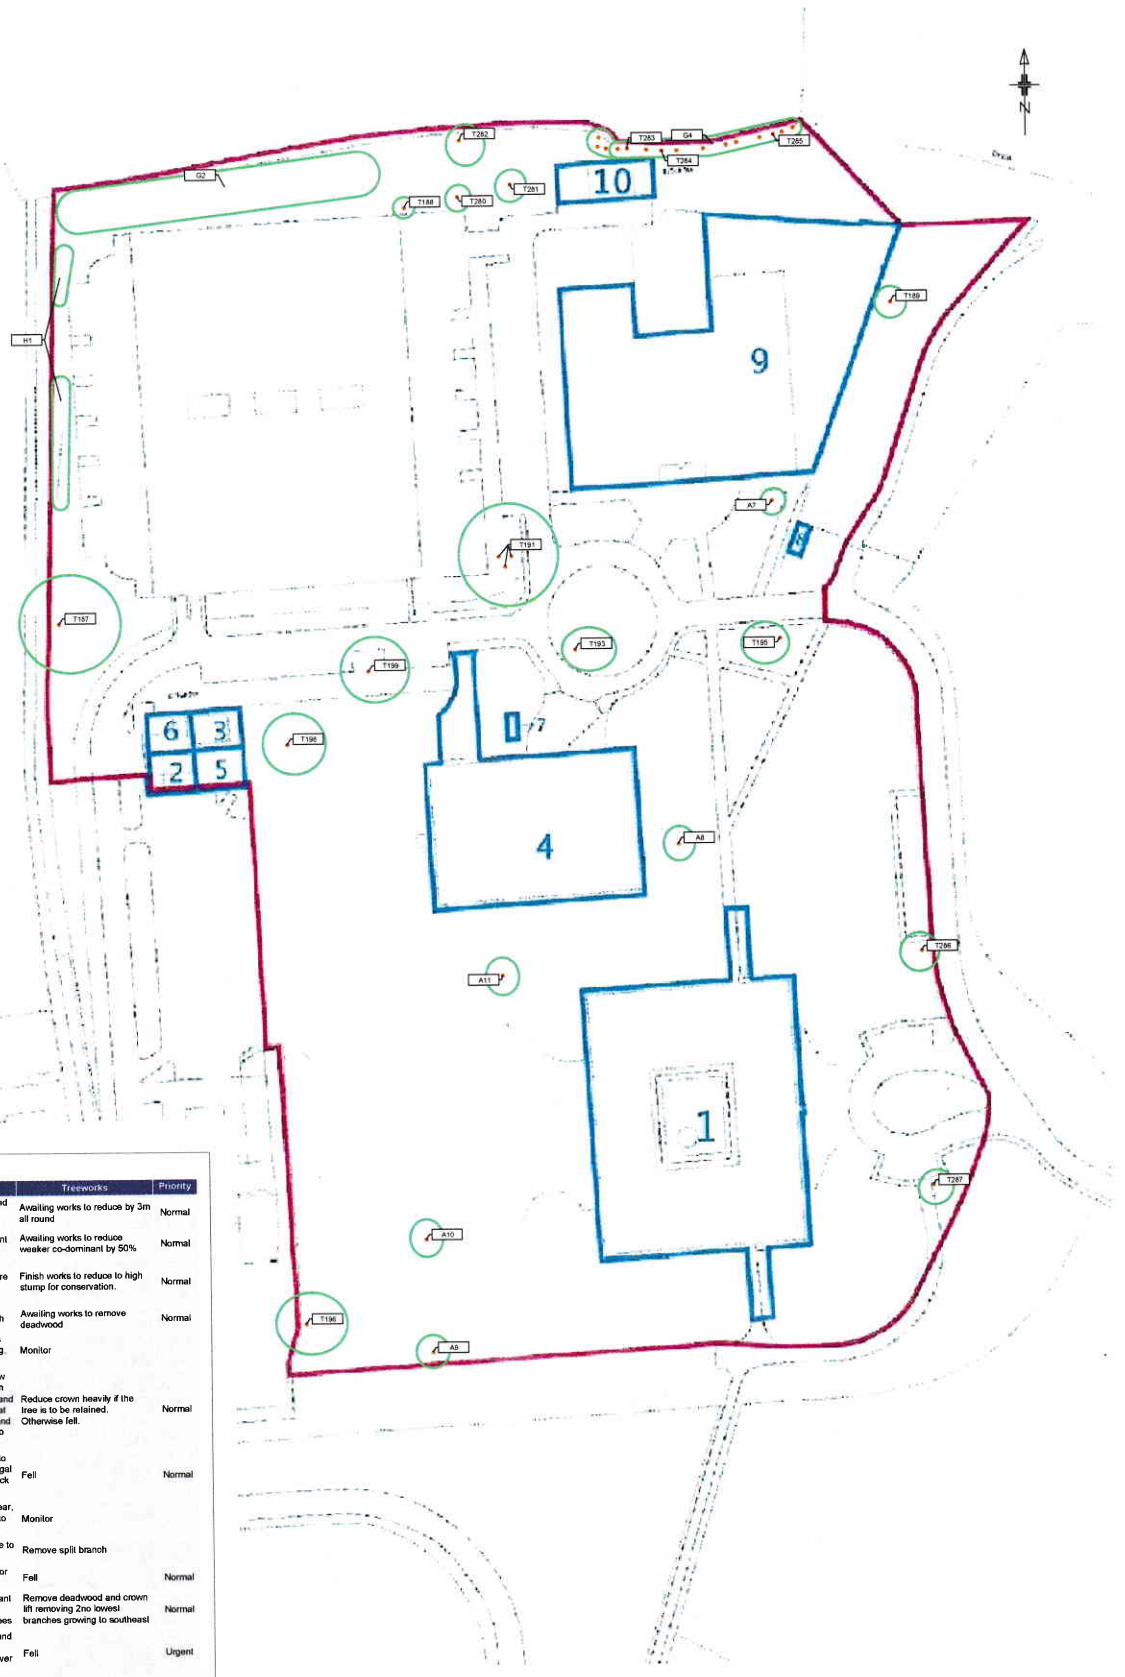

Tree schedule

Tree No	Species	Maturity	Notes	Treeworks	Priority
T187	Oak	Over-mature	Veteran potential, hollow trunk and extensive decay. Previously reduced.	Awaiting works to reduce by 3m all round	Normal
T188	Ash	Maturing	Twin stemmed at 2m, co-dominant stems.	Awaiting works to reduce weaker co-dominant by 50%	Normal
T189	Ash	Mature	Mature tree has been partially reduced to a high stump. Cuts are not complete and cannot be described as pollarding.	Finish works to reduce to high stump for conservation.	Normal
T191	Lime	Mature	Deadwood overhanging footpath	Awaiting works to remove deadwood	Normal
T193	Variegated sycamore	Mature	Low vigour and several defects associated with previous pruning. Focal point in roundabout.	Monitor	
T195	London plane	Mature	Previously topped at 6m. Hollow stem. Inonolus bracket fungi on upper branch stub, Perenniporia and Phellinus fungal fruiting bodies at base. Adjacent to access road and footpath. Species is resilient to pruning.	Reduce crown heavily if the tree is to be retained. Otherwise fell.	Normal
T196	Horse chestnut	Mature	Spiral crack formation up stem to 12m, slight lean. Polyporous fungal fruiting bodies within crack. Crack larger than last year.	Fell	Normal
T198	Wild cherry	Mature	Dieback has reduced from last year, but still of poor form and close to parking area and footpath.	Monitor	
T280	Ash	Maturing	Split branch in upper crown, close to parking area	Remove split branch	
T281	Ash	Maturing	Lost top and broken branch, poor quality tree	Fell	Normal
T282	Poplar	Mature	Ivy cut, leaning tree with significant deadwood, low branches suppressing adjacent smaller trees	Remove deadwood and crown lift removing 2no lowest branches growing to southeast	Normal
T283	Poplar	Mature	Ivy cut, significant decaying wound from previous stem removal. Weighted away from structure over neighbours land.	Fell	Urgent
T284	Poplar	Mature	Ivy cut, several decaying wounds on stem	Fell	Urgent
T285	Poplar	Maturing	Dead	Fell	Urgent
T286	Sweetgum	Young	Close to light column and will cause issues in near future	Formative prune to clear light column	Low
T287	Sweetgum	Young	Low branches overhanging parking area	Crown lift to 4m	Low
H1	Hornbeam	Maturing	Overgrown hedge forming a dense line of stems on top of retaining wall. Requires management to either reduce height of crowns, or reduce number of stems.		
G2	Leyland cypress	Maturing	Poor quality trees, evidence of dieback and deadwood throughout. Requires consideration as to long term aims for this boundary.		
G4	Poplar	Mature	Tall trees, several to be removed (T283, T284 and T285). Deadwood throughout, known to be a species prone to failure.	Crown reduce remaining trees by 30%	Normal
A7	Himalayan birch	Maturing	Ornamental tree with small stem defect	Monitor	
A8	Tulip tree	Young	Pit cleared, needs mulch		
A9	Blue spruce	Young	Infested with gall wasp, disfigured and no long term retention potential unless pit is managed properly, mulched and watered to improve chances of recovery		
A10	Giant redwood	Mature	Animal activity at base	Monitor	
A11	Oak	Young	Pit maintenance required		

TX Tree Number

Estimated tree positions not included on original land survey and/or adjusted crown spreads.

Tree condition plan

Location of trees and management proposals at Hayes Park, Hayes End Road, Uxbridge, London

Permission is granted to scale from this drawing for Local Authority Planning Approval purposes relating to tree protection measures only. Where applicable this drawing is to be read in conjunction with the arboricultural report. This drawing is the copyright of Barrell Tree Consultancy 2017. ©

This drawing to be reproduced in colour only.

Barrell Plan Ref. 16117-BT2

Provided Plan Refs. AGL153495

barrell TREE CONSULTANCY

Field House, Fordingbridge Business Park, Ashford Road, Fordingbridge SP6 1BY
Tel: 01425 651470 Fax: 01425 653449
www.barrelltreecare.co.uk