

Easy PV > loggedout Inverter Only Easy PV Project R... Easy PV > mp... Solar mounting Landscape Sou... +

valksolarsystems.com/solar-mounting-systems/flat-roofs/landscape/south/valkpro+110-south

NDS https://chat.openai.com/ Cable Calculator | C... Ground Live Parking Fine New Dawn PV Des... Segen Wholesale O... B-Online NDS MCS FOLDER...

**VAN DER VALK**  
SOLAR SYSTEMS

Calculation software Downloads Distributors Installation technicians EPC Project Blogs FAQ Contact

SYSTEMS VALKCABLECARE VALKSOLARFIX SERVICE & EVENTS ABOUT US

We are searching for 4 new colleagues

**ValkPro+ L10 South**

Flat roofs

- ↳ Landscape
- ↳ South
- ↳ **ValkPro+ L10 South**
- ↳ East-West
- ↳ Portrait


Pitched roofs

Kits

Ground mount

Unique to this PV mounting system:

- ✓ Landscape mounting
- ✓ 10° tilt angle
- ✓ Pitch: 1300, 1400, 1500 1600 or 1700 mm
- ✓ Also available in east-west configuration



Ask a question about this product

Sign up for email updates

Subscribe now

Calculate your custom flat


Features Foundation methods Extras Documentation

Type here to search


10:10 8°C Partly sunny 08/12/2023

## ENGINEERING DRAWING (mm)


### Rear View

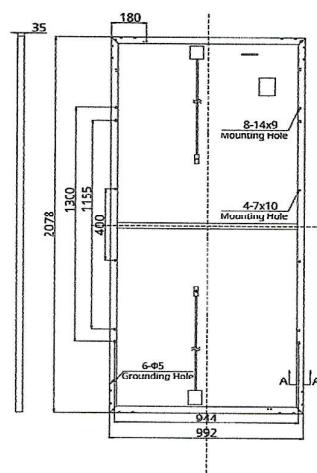

### Frame Cross Section A-A



## CS1U-405MS / I-V CURVES

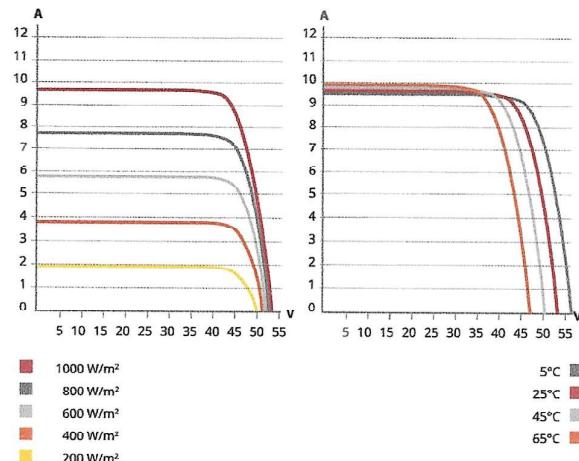

## ELECTRICAL DATA | STC\*

CS1U	400MS	405MS	410MS	415MS	420MS
Nominal Max. Power (Pmax)	400 W	405 W	410 W	415 W	420 W
Opt. Operating Voltage (Vmp)	44.1 V	44.3 V	44.5 V	44.7 V	44.9 V
Opt. Operating Current (Imp)	9.08 A	9.16 A	9.23 A	9.30 A	9.37 A
Open Circuit Voltage (Voc)	53.4 V	53.5 V	53.6 V	53.7 V	53.8 V
Short Circuit Current (Isc)	9.60 A	9.65 A	9.70 A	9.75 A	9.80 A
Module Efficiency	19.4%	19.6%	19.9%	20.1%	20.4%
Operating Temperature	-40°C ~ +85°C				
Max. System Voltage	1500V (IEC) or 1000V (IEC)				
Module Fire Performance	CLASS C (IEC 61730)				
Max. Series Fuse Rating	15 A				
Application Classification	Class A				
Power Tolerance	0 ~ + 10 W				

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

## MECHANICAL DATA

Specification	Data
Cell Type	Mono-crystalline
Dimensions	2078 x 992 x 35 mm (81.8 x 39.1 x 1.38 in)
Weight	23.4 kg (51.6 lbs)
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminium alloy
J-Box	IP68, 4 bypass diodes
Cable	4.0 mm² (IEC)
Cable length	1000 mm (39.4 in) (+) and 640 mm (Including connector) (25.2 in) (-); leap-frog connection: 1780 mm (70.1 in)**
Connector	T4 series or H4 UTX or MC4-EVO2
Per Pallet	30 pieces
Per Container (40' HQ)	660 pieces

\* Adjacent two modules (portrait: left and right modules, landscape: up and down modules) need to be rotated 180 degrees.

\*\* Need to confirm with the tracker suppliers there are no mounting or operation risks when cables go across the torque tube and bearing house.

## ELECTRICAL DATA | NMOT\*

CS1U	400MS	405MS	410MS	415MS	420MS
Nominal Max. Power (Pmax)	296 W	300 W	304 W	307 W	311 W
Opt. Operating Voltage (Vmp)	40.8 V	41.0 V	41.2 V	41.4 V	41.5 V
Opt. Operating Current (Imp)	7.26 A	7.32 A	7.37 A	7.43 A	7.48 A
Open Circuit Voltage (Voc)	49.9 V	50.0 V	50.1 V	50.2 V	50.3 V
Short Circuit Current (Isc)	7.75 A	7.79 A	7.83 A	7.87 A	7.91 A

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

## TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.37 % / °C
Temperature Coefficient (Voc)	-0.29 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	43±3 °C

## PARTNER SECTION


The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustment to the information described herein at any time without further notice.

Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

## CANADIAN SOLAR INC.

545 Speedvale Avenue West, Guelph, Ontario N1K 1E6, Canada, [www.canadiansolar.com](http://www.canadiansolar.com), [support@canadiansolar.com](mailto:support@canadiansolar.com)

NEW

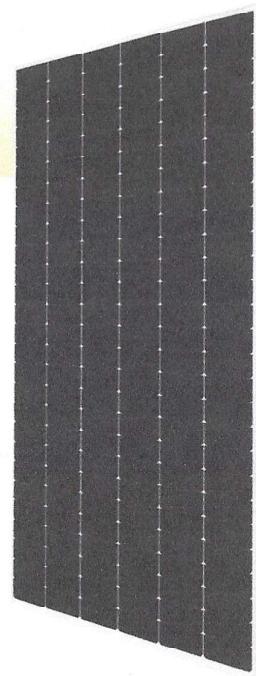

## HiDM

High density MONO PERC module  
400W~420W  
CS1U-400|405|410|415|420MS

### MORE POWER




Maximize the light absorption area,  
module efficiency up to 20.4 %



Low temperature coefficient (Pmax):  
-0.37 % / °C



Better shading tolerance

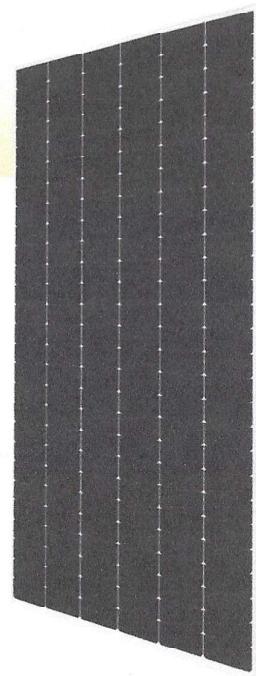

enhanced product warranty on materials  
and workmanship\*



linear power output warranty\*

### MORE RELIABLE



Lower internal current,  
lower hot spot temperature



Cell crack risk limited in small region,  
enhance the module reliability



Heavy snow load up to 5400 Pa,  
wind load up to 2400 Pa\*

\*According to the applicable Canadian Solar Limited Warranty Statement.

### MANAGEMENT SYSTEM CERTIFICATES\*

ISO 9001:2015 / Quality management system  
ISO 14001:2015 / Standards for environmental management system  
OHSAS 18001:2007 / International standards for occupational health & safety

### PRODUCT CERTIFICATES\*

IEC 61215 / IEC 61730: VDE / CE / MCS / KS / INMETRO  
IEC 61701 ED2: VDE / IEC 62716: VDE  
UNI 9177 Reaction to Fire: Class 1 / Take-e-way



As there are different certification requirements in different markets, please contact your local Canadian Solar sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

**CANADIAN SOLAR INC.** is committed to providing high quality solar products, solar system solutions and services to customers around the world. No. 1 module supplier for quality and performance/price ratio in IHS Module Customer Insight Survey. As a leading PV project developer and manufacturer of solar modules with over 40 GW deployed around the world since 2001.

\* For detail information, please refer to Installation Manual.

### CANADIAN SOLAR INC.

545 Speedvale Avenue West, Guelph, Ontario N1K 1E6, Canada, [www.canadiansolar.com](http://www.canadiansolar.com), [support@canadiansolar.com](mailto:support@canadiansolar.com)