


Daikin Altherma 3

Low Capacity Monobloc

(4-6-8 class)



Setting the new Monobloc standard



E(B/D)LA04-08EV3

Daikin Altherma 3 Low Capacity Monobloc

4-6-8 class

Functional design

Now available in 4,6 and 8 class, Daikin Altherma 3 Low Capacity Monobloc is Daikin's first third generation monobloc, benefiting from a new design and using R32 refrigerant, which has a low Global Warming Potential (GWP).

A redesigned casing

The white front grille of horizontal lines hides the fan from view, reducing the perception of the sound produced by the unit.


The light grey, seamless casing reflects the environment in which the unit is installed, helping it to blend in with its surroundings.

A renewed fan shape


The shape of the fan has been reviewed to reduce the contact surface with air and improve air circulation.

Easy installation and commissioning

- › The rotary switchbox is a brand-new feature in this monobloc heat pump.
- › It helps installers access the hydraulic and refrigerant components in an easy way.
- › Commissioning and servicing can be then performed with ease.

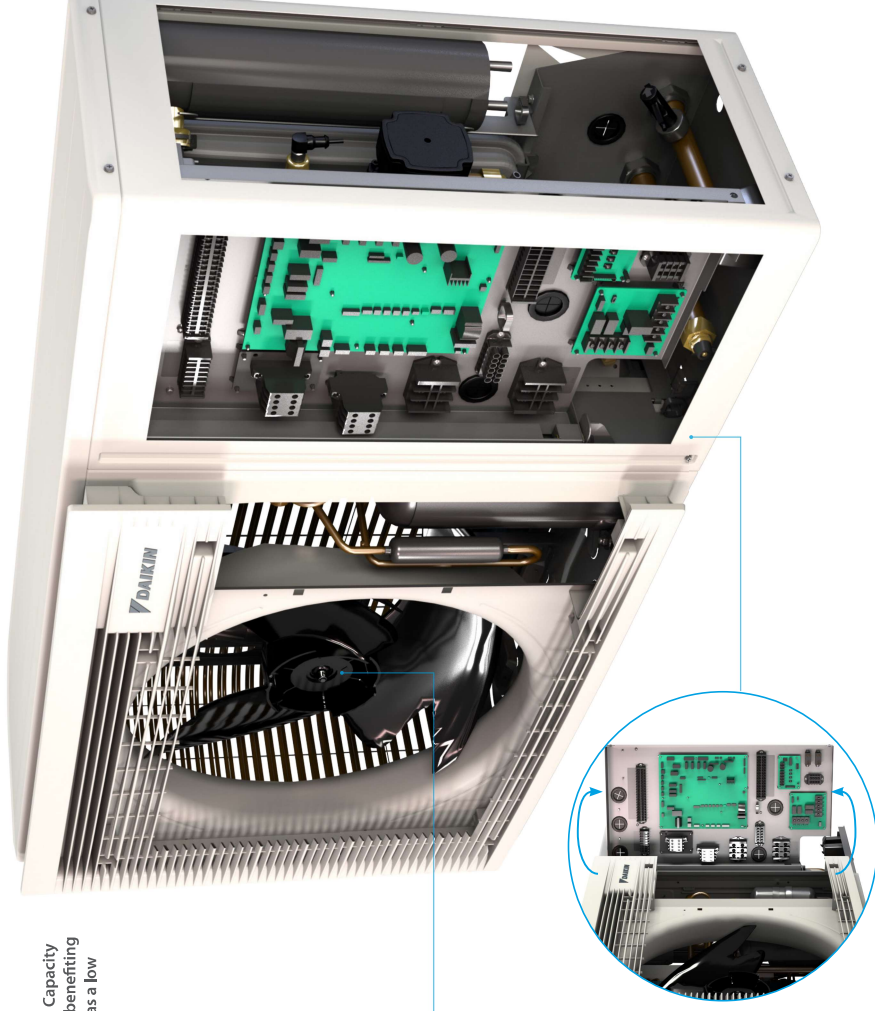

Reduced environmental impact: 70% less CO₂ equivalent
› GWP: R410A 2,088 > R32: 675

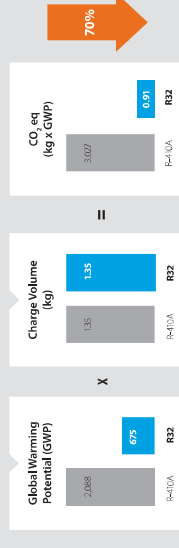

R32 monobloc BLUEEVOLUTION

Daikin is a pioneer in developing heat pumps equipped with R32. With a lower GWP, R32 is equivalent in power to standard refrigerants, but achieves higher energy efficiency and lower CO₂ emissions. Easy to recover and reuse, R32 is the perfect solution for attaining CO₂ emission reduction targets.

A simple solution to space limitation

Thanks to the monobloc set-up, no indoor unit is required which helps when space is limited inside. The monobloc can even fit under a window.

All the hydraulic components are integrated in one unit, including the sealed refrigerant circuit, so there's no need for refrigerant handling or F-gas qualifications.