

Sign A
Springflex Click 90 System (90mm profile), anodised powder-coated red RAL 3020 aluminium box sections complete with aluminium back. Internally illuminated and faced with anti-fade ultra violet protected digitally printed self-tensioning PVC skin. Fitted to composite board glazing infills above entrance/exit doors.


Sign B
Springflex 140mm profile, anodised powder-coated red RAL 3020 aluminium box section complete with aluminium back. Internally illuminated and faced with anti-fade ultra violet protected digitally printed self-tensioning PVC skin. Fitted to brickwork and existing steel rails using masonry fixings and 8mm stainless steel bolts. Fixings can pick up anywhere from inside the sign box - no specific centres requirements.

Illumination

Osram 6815 LED modules plus converters, complete with 5 year maintenance free guarantee. Load max 4 Amps.

Luminance

Light Blue: 53cd/m² Red: 8cd/m² White (base pvc material): 155cd/m². Average luminance approx. 55cd/m²

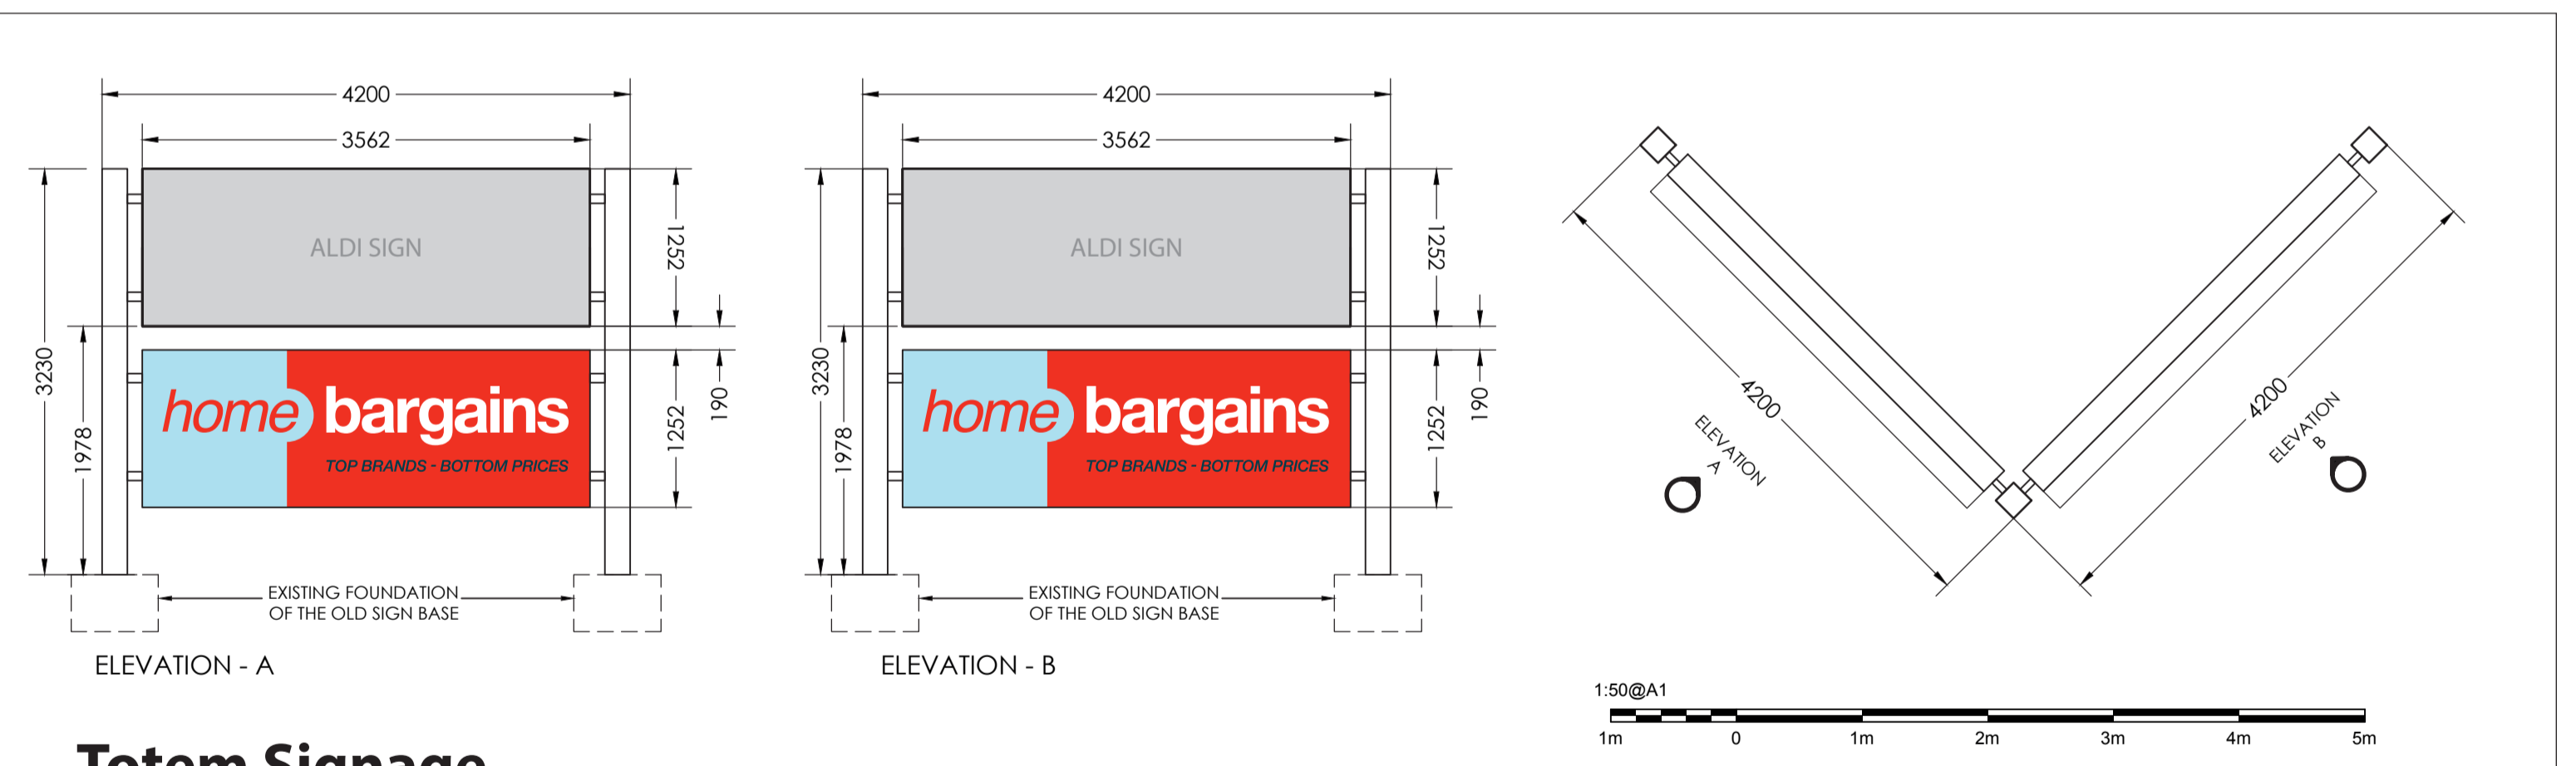

Totem Signage

2 no. UV digitally printed pvc flexface sign faces required for inclusion on the existing site totem. Sign structure and sign cases are provided by the landlord. Sign cases are internally illuminated with static LED (provided by landlord) and luminance levels will match the ALDI signage above.

Uxbridge

LLOYDSIGNS			
© Lloyd Signs Limited 4 Langdale Court, Corporation Road, Birkenhead, Merseyside CH41 8DT T: 0151 653 8053 E: sales@lloydsgns.co.uk			
Project	Harefield Road Uxbridge UB8 1JS		
Title	Signage Scheme		
Date	Feb 26	Scale	As shown
Drwg. No.	001	Revision	Rev 4
		Sheet Size	A1