

SECTION BB



CODE 4 LEAD FLASHING

2400

150 min

500 MIN 500 MIN

This diagram shows a cross-section of the window assembly. The window frame is shown with a height dimension of 2400. The lead flashing is labeled 'CODE 4 LEAD FLASHING'. The window is set into a wall, and the bottom of the window is shown with a minimum clearance of 500 mm from the ground level. The window is shown in a closed position.

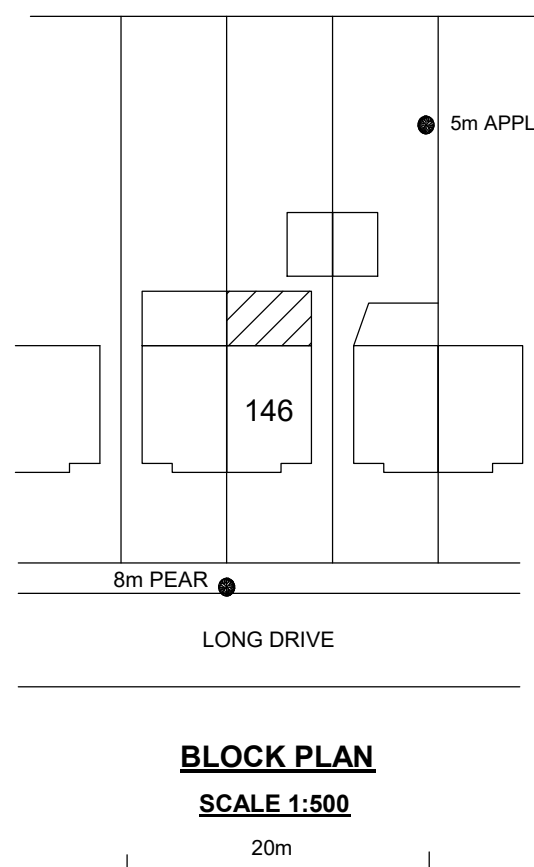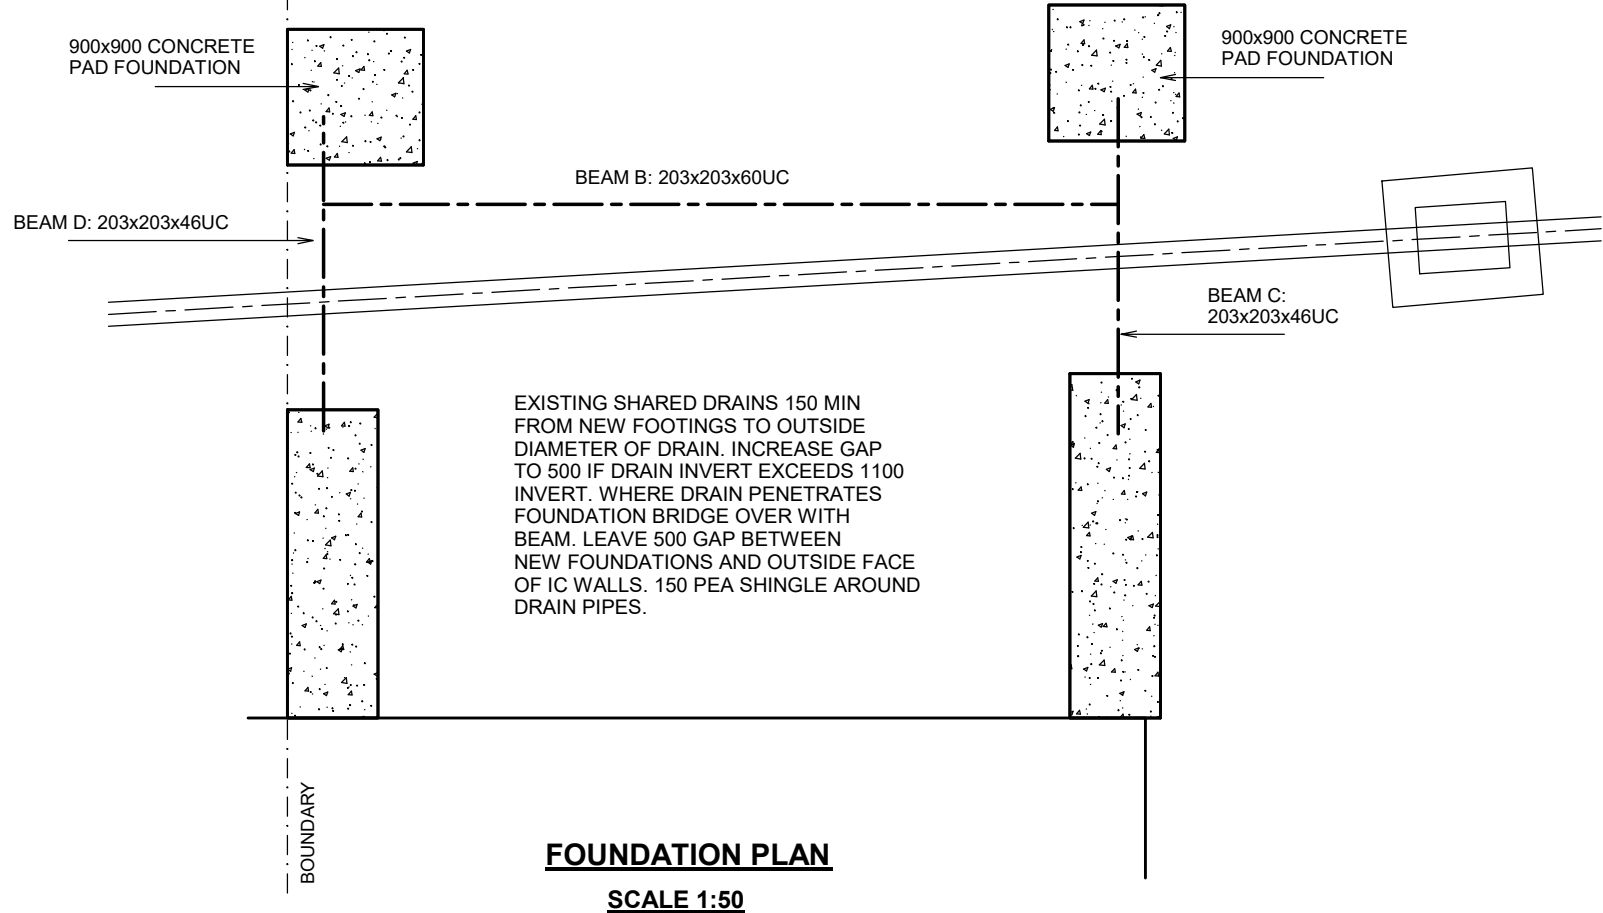

ALL FIRE DOORS TO BE FITTED WITH INTUMESCENT STRIPS TO DOOR OR FRAME. 3no 100mm STEEL BUTT HINGES WITH MELTING POINT IN EXCESS OF 800 DEG C

New radiators to be fitted with thermostatic valves. Work to gas pipework, boilers & appliances to be carried out, tested and certified by Gas Safe registered person.

BOUNDARIES ESTIMATED AND TO BE CONFIRMED ON SITE. ALL NEW WORKS TO BE CONTAINED WITHIN THE BOUNDARIES LINES STATED OTHERWISE UNLESS OTHERWISE NOTED ON PLAN. ALL DIMENSIONS TO BE CONFIRMED ON SITE. ALL STEEL DIMENSIONS TO BE CONFIRMED ON SITE AND NOT TAKEN FROM TECHNICAL DRAWINGS. ALL DIMENSIONS TO BE CONFIRMED FROM CONTRACTS ARCHITECTURAL DRAWINGS/ SPEC. ENGINEERS DESIGN PREVAILS. ALL DRINKS & TREES ARE ESTIMATED AND ARE TO BE CHECKED & CONFIRMED ON SITE BEFORE ANY WORK COMMENCES. THIS DRAWING IS FOR PLANNING & BUILDING REGULATION APPLICATION PURPOSES. BUILDERS AND CONTRACTORS TO BE ADVISED TO ENSURE WORKS COMPLY WITH CONFORMATIONS BEFORE WORK COMMENCES. CLIENT TO SERVE PARTY PLANT ACT NOTICE BEFORE COMMENCEMENT OF WORKS. THE LIABILITY OF THE CLIENT FOR ANY DAMAGE TO THE PROPERTY OR CONTRAVENE ANY RESTRICTIVE COVENANTS CONTAINED IN THE DEEDS.