



Creating outdoor spaces



Cladding

Railing

Fencing

Decking

Made in France



2019

SILVADEC, EUROPEAN LEADER IN WOOD COMPOSITE



Drawing on our experience in wood composite manufacture, we are pursuing our mission to **CREATE NEW PRODUCTS FOR OUTDOOR USE**, in line with your desires and new trends in design!

Thanks to the inherent qualities of our wood composite, which offers a perfect marriage between **DURABILITY AND EASY MAINTENANCE**, relaxing in your garden or around your swimming pool will now be a joy!

Your garden is an extension of your home, which is why we offer you a wide range of different products with a variety of colours and original finishes as well as design ideas to make your garden unique!

This is the primary focus of our Research and Development engineers. Every year, they create innovations that combine aesthetics and cutting-edge materials, while meeting the technical and safety requirements.

AS A FRENCH MANUFACTURER, the innovative leader in our market, **WE GUARANTEE OUR PRODUCTS FOR 25 YEARS***, and work with you to **CREATE THE OUTDOOR LIVING AREA THAT YOU HAVE ALWAYS DREAMED OF!**

* The terms of the warranty can be downloaded from the Silvadec website at silvadec.com



A LOCAL, CLEAN AND SUSTAINABLE PRODUCT

AN ECO-FRIENDLY PRODUCT

Thanks to its **technical expertise** (based on **more than 25 years of experience in North America**), Silvadec develops a **unique formulation** for a high-quality, eco-friendly wood composite designed for outdoor use. Silvadec® wood composite is a high-quality bulk-dyed material. **Composed mainly of wood**, it is made from a mixture of wood flour sourced from France (2/3) and high density polyethylene (1/3). A highly technical product, this material is durable, **100% recyclable and non-toxic** (no glue or formaldehyde).

As a local manufacturer, Silvadec can also recycle its customers' waste materials.

OUR ENVIRONMENTAL COMMITMENT

Silvadec pursues an ecologically responsible policy and meets strict environmental standards.

In 2014, the company obtained its ISO 14001 certification, further proof of its commitment. In 2017, Silvadec obtained the SGBC (Singapore Green Building Certificate). This certificate consolidates the high-quality image of the products, and facilitates access to new markets.

Silvadec's environmental policy is supported by the ADEME, the Environmental and Energy Management Agency, which recognises Silvadec® wood composite as an excellent alternative to the use of tropical woods, thus helping to reduce mass deforestation.



A HIGH-QUALITY WOOD COMPOSITE DESIGNED FOR OUTDOOR USE




Due to being **ROT-RESISTANT AND UV-RESISTANT**, our wood composite Silvadec® is ideal to use for your decking, fencing, cladding or pool decks.

It requires no treatment, only regular cleaning.

The boards will not fade to **GREY OVER TIME**, will not splinter and are non-slippery.



* The terms of the warranty can be downloaded from the Silvadec website at silvadec.com

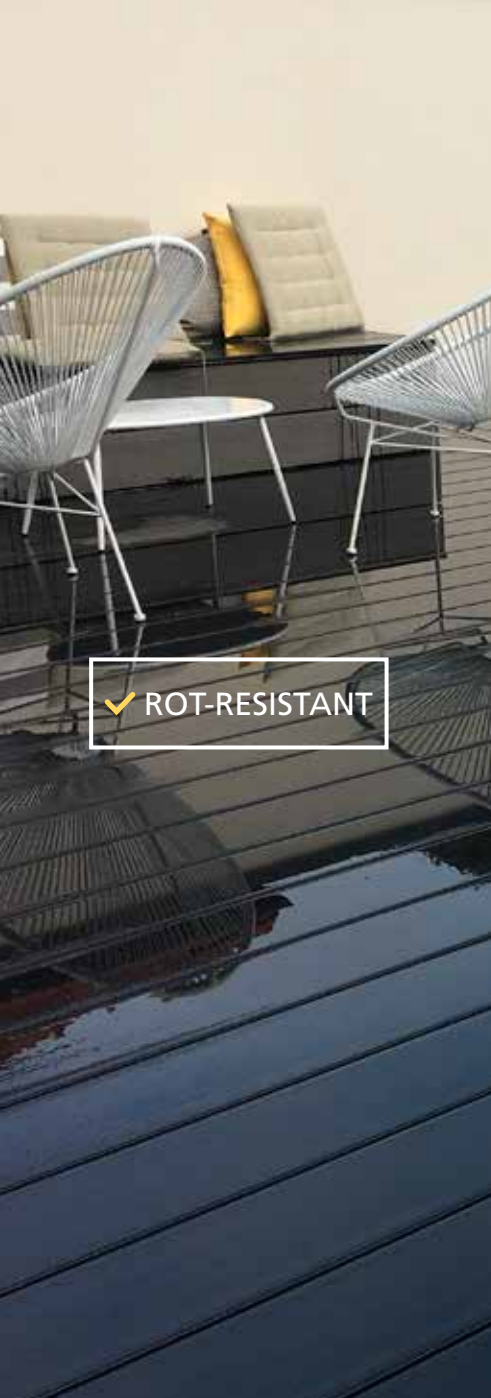

✓ ROT-RESISTANT

SMOOTH ELEGANCE BOARD - ANTHRACITE GREY



✓ SPLINTER-FREE

GROOVED ELEGANCE BOARD - EXOTIC BROWN



✓ WILL NOT GREY
OVER TIME

ATMOSPHERE FENCING BOARD - ANTHRACITE GREY


MANY ADVANTAGES FOR USE



✓ **SOLID BOARD,
EASY TO
WORK WITH**

The unique formulation of our Silvadec® wood composite, mainly made up of wood, offers many advantages. **OUR SOLID DECKING BOARDS ARE MADE IN ONE SOLID PIECE AND ARE EASY TO WORK WITH, JUST LIKE SOLID WOOD.**

They have a warm look and good UV resistance. Our discreet fastening system uses stainless steel screws and clips to ensure perfect and aesthetic decking installation.

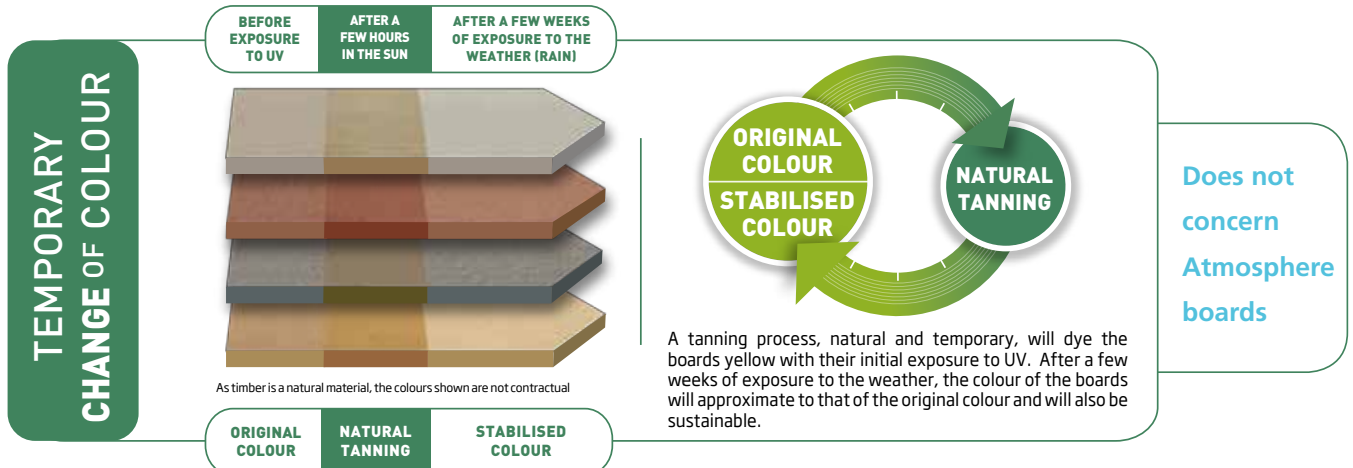



✓ FROST-RESISTANT

GROOVED ELEGANCE BOARD - EXOTIC BROWN



✓ SUITABLE FOR POOL DECKS

EMBOSSED ELEGANCE BOARD - ANTHRACITE GREY



✓ NO TREATMENT IS REQUIRED

GROOVED ELEGANCE BOARD - COLORADO BROWN



✓ SLIP-RESISTANT


EMBOSSED ELEGANCE BOARD - ANTHRACITE GREY




✓ UV-RESISTANT

HOTEL PARAGRAPH RESORT AND SPA, GEORGIA - GROOVED ELEGANCE BOARD - EXOTIC BROWN

SILVADEC OFFERS YOU A WIDE RANGE OF PRODUCTS

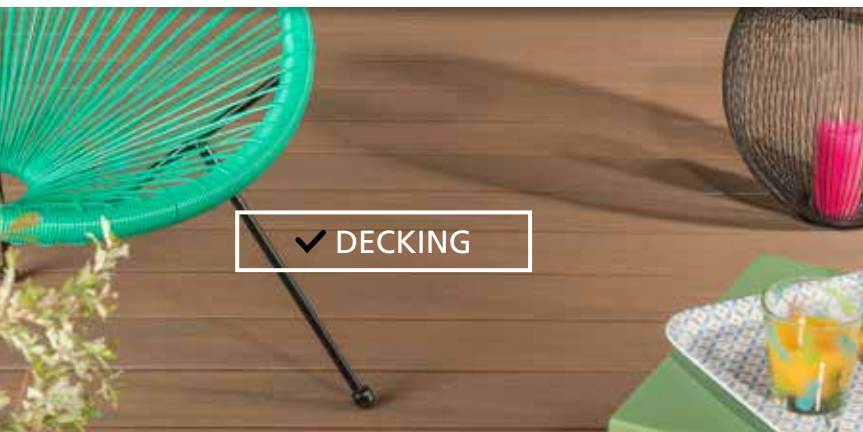

✓ DECKING

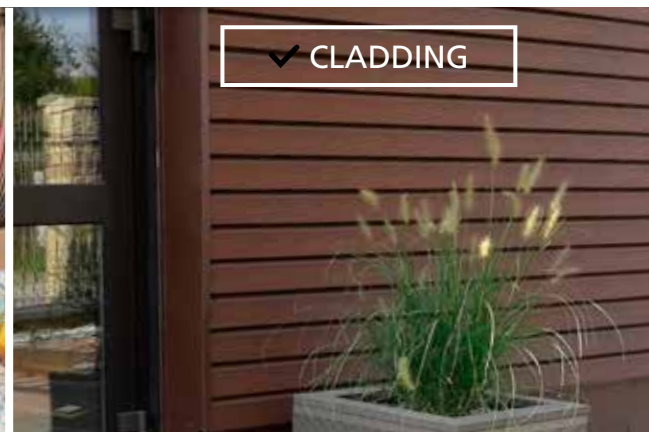

✓ CLADDING



✓ FENCING



✓ RAILING

Our innovative Research & Development department offers modular and practical products, by combining wood with modern and aesthetic materials.

Discover our range of **EASY-TO-USE**, **DURABLE**, and environmentally-friendly products, for creating a stylish outdoor space with confidence!

Decking boards, fencing and cladding made from Silvadec® wood composite are divided into two broad categories:

The **Natural** range for those who appreciate authenticity, and the **HIGH-TECH** range for those who prefer a more modern look. Your selection of boards will thus depend on your expectations in terms of use, maintenance, aesthetics and design.

Natural RANGE



Manufacturing process: Extrusion

CHARACTERISTICS


Silvadec® bulk-dyed

wood composite

ATTRIBUTES

- Very natural surface appearance, similar to that of unfinished wood.
- The boards are as easy to work as solid wood and can be sanded, planed and drilled.
- Good slip resistance

HIGH-TECH RANGE

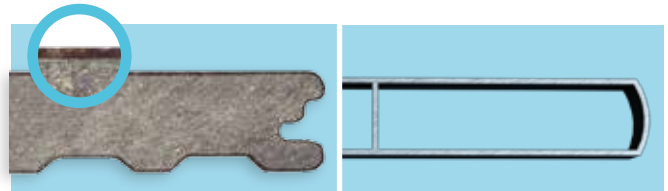

Manufacturing process: Co-extrusion

CHARACTERISTICS

Silvadec® wood composite, capped with a protective polymer coating

ATTRIBUTES

- No temporary tanning of the boards
- Easy to clean
- Good slip resistance

Manufacturing process: Aluminium extrusion

CHARACTERISTICS

Thermo-coated aluminium board

ATTRIBUTES

- Forms a modular openwork or solid fence
- Easy maintenance
- A board compatible with all Silvadec accessories

ELEGANCE BOARD




Decking

Fencing

Sunshades

Railing

ATMOSPHERE BOARD

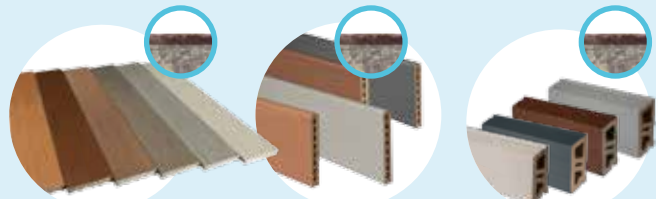

Decking

Fencing

Cladding

EMOTION BOARD



Decking

ALUMINIUM BOARD



Fencing

DECKING RANGE

The choice for exceptional decking

HOW TO CHOOSE YOUR DECK BOARD?

ON A TECHNICAL LEVEL, HERE ARE SOME GUIDELINES TO MAKE YOUR SELECTION:

Silvadeck decking board: characteristics / applications	Grooved Elegance	Smooth Elegance	Embossed Elegance	Smooth Emotion	Brushed Atmosphere
• Selection, customisation (dimensions, colours, finishes)	★★★	★★★	★★★	★	★★★
• Worked in the same manner as solid wood	★★	★★★	★★	★★★	★
• Temporary tanning	YES	YES	YES	YES	NO
• Scratch resistance	★★★	★	★★	★	★★
• Repairable surface finish (sanding)	★★	★★★	★	★★★	NA
• Slip resistance	★★★	★★	★★	★★	★★★
• Comfortable barefoot (t° of the board in the sun) compared to exotic wood	★★	★★	★★	★★	★
• Easy maintenance	★★	★★	★★	★★	★★★
• Suitable for outdoor areas subjected to UV rays and rain	★★★	★★★	★★★	★★★	★★★
• Suitable for sheltered or covered areas	NA	NA	NA	NA	★★★

★: average

★★: good

★★★: very good

NA: not applicable

Regarding the choice of colour, dark colours have the advantage of being less prone to show dirt. For decking or pool deck applications, light colours are less hot on bare feet. Our decking boards contain a high proportion of wood, and are less hot in the sun than other wood composites. Whatever the colour,

the temperature of your boards in the sun is close to that of exotic wood decking boards. Only the Atmosphere coextruded board is warmer, since the board is encased with a polymer layer.



abCd'architecture

ATMOSPHERE BOARD - LIMA



PALM ISLAND RESORT, DUBAI. GROOVED ELEGANCE BOARD - EXOTIC BROWN



ATMOSPHERE BOARD - CAYENNE



GROOVED ELEGANCE BOARD - EXOTIC BROWN



GROOVED ELEGANCE BOARD - ANTHRACITE GREY

Natural Range

ELEGANCE BOARD

PUT YOUR PERSONAL STAMP ON YOUR DECKING,
WITHOUT LIMITS

SMOOTH ELEGANCE BOARD



2 widths: 138 and 180 mm
4 colours



SMOOTH ELEGANCE BOARD - EXOTIC BROWN




SMOOTH AND GROOVED ELEGANCE BOARD - ANTHRACITE GREY



SMOOTH ELEGANCE BOARD - ANTHRACITE GREY



GROOVED ELEGANCE BOARD



2 widths: 138 and 180 mm
4 colours

The Elegance board offers a SELECTION OF COLOURS, WIDTHS, FINISHES AND ACCESSORIES, giving you the freedom to create your own outdoor space.



GROOVED ELEGANCE BOARD - EXOTIC BROWN



PANORAMIC DECKING AT THE TOUR MONTPARNASSE, PARIS.
GROOVED ELEGANCE BOARDS - ANTHRACITE GREY AND IROISE GREY



GROOVED ELEGANCE BOARD - ANTHRACITE GREY



EMBOSSSED ELEGANCE BOARD

2 widths:
138 and 180 mm
4 colours



EMBOSSSED ELEGANCE BOARD - IROISE GREY



EMBOSSSED ELEGANCE BOARD - ANTHRACITE GREY

Natural Range


EMOTION BOARD

CHOOSE THE WARM RADIANCE
OF THE EMOTION BOARD

You will be amazed by the exceptional character of our Emotion decking. The random colouring of the wood composite makes **EACH BOARD UNIQUE!**



EMOTION BOARD - EQUATOR

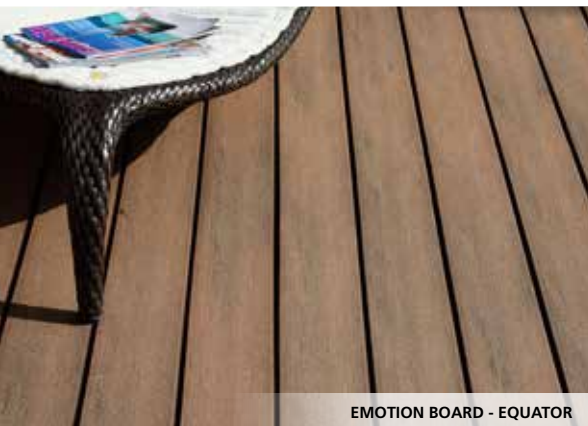

EMOTION BOARD - EQUATOR



EMOTION BOARD - SAVANNAH



EMOTION BOARD

Width 138 mm
2 colours



EMOTION BOARDS - SAVANNAH AND EQUATOR



EMOTION BOARD - SAVANNAH

HIGH-TECH Range

ATMOSPHERE BOARD


CHOOSE AN INNOVATIVE BOARD
SUITABLE FOR ALL USES

NEW

A SOBER AND REFINED
COLOUR SCHEME, FOR A MORE
AUTHENTIC LOOK!

Its qualities are the RESULT OF TECHNOLOGICAL INNOVATION, which makes it highly stain and slip-resistant. The waterproof Atmosphere board meets the requirements for **fast and easy maintenance**.

Its **intense, consistent colour, resistance to UV rays** and its brushed **grain finish** make it truly unique.

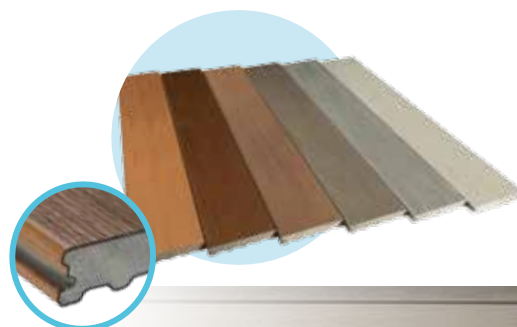

ATMOSPHERE BOARD - CAYENNE

ATMOSPHERE BOARD

NEW

AVAILABLE IN
WIDTH 180 mm

✓ EXCELLENT SLIP RESISTANCE

ATMOSPHERE BOARD - RIO

ATMOSPHERE BOARD - USHUAIA



✓ COLOUR DURABILITY AND STABILITY


ATMOSPHERE BOARD - USHUAIA

THE ATMOSPHERE
BOARD IS AVAILABLE
IN SIX COLOURS.



✓ QUICK AND EASY MAINTENANCE


ATMOSPHERE BOARD - SAO PAULO

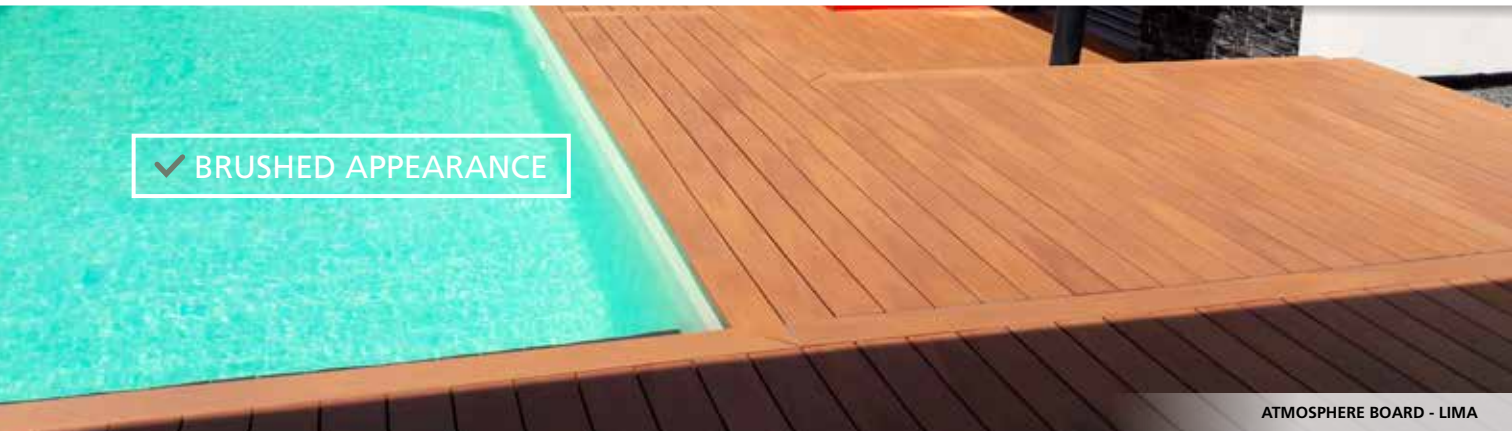

✓ BRUSHED APPEARANCE


ATMOSPHERE BOARD - LIMA

DECKING RANGE

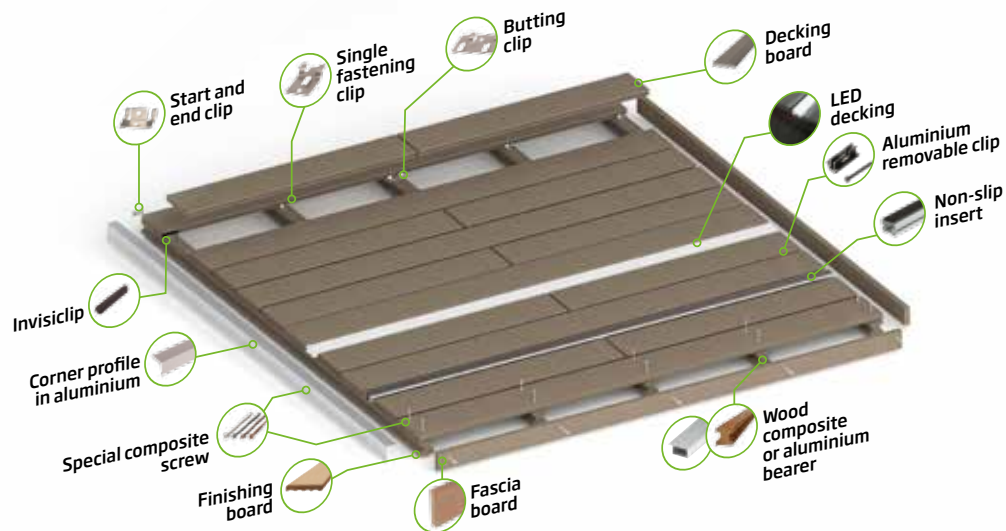

Natural Range

Elegance boards




Grooved finish

Dimensions in mm:
138x23x4000 and 180x23x4000



Smooth finish

Dimensions in mm:
138x23x4000 and 180x23x4000




Embossed finish

Dimensions in mm:
138 x 23 x 4000 and 180 x 23 x 4000

Available from 1 to 6m by special order.
Colours: Colorado brown, Exotic brown, Anthracite grey, Iroise grey.

Emotion boards



Smooth finish

Dimensions in mm:
138 x 23 x 4000

Available from 1 to 4m
by special order
Colours: Savannah brown,
Equator brown.

HIGH-TECH Range

Atmosphere boards



Brushed finish

Dimensions in mm:
138 or 180 x 23 x 4000

Colours:
Sao Paulo brown,
Rio brown
Lima brown,
Cayenne grey,
Ushuaia grey,
Belém grey

INSTALLATION ACCESSORIES*


*Hidden fastening system



✓ **INSTALLED ON
CONCRETE SLAB**

wood composite bearer:
suitable only for flat installation
on a concrete slab.

Dimensions in mm: 50 x 50 x 3000
or 50 x 50 x 4000



✓ **MOUNTED
ON PEDESTALS**

Aluminium bearer:
Enables installation on pedestals at
large intervals: 90 cm for a private
installation, and 60 cm for a public
installation.

Dimensions: 47 x 76 x 4000 mm




NEW

Screw for aluminium bearer:
Screw compatible with single fastening
clip, start and end clips, and aluminium
bearer. Bag of 360 screws
Ø3.5 x 19 mm




**Special composite stainless
steel screw:**
screws to match the colours of our
decking boards.



Stainless steel butting clip:
used to attach several board corners onto
the same single bearer.
This butting clip is not compatible with the
aluminium bearer.



**Single stainless
steel fastening clip:**
for board / bearer
intersections.



Stainless steel start and end clip:
used to fasten the boards along the edge
of the decking to each bearer.



Aluminium removable clip:
This is used to create an access hatch for an element
located below the decking, to make the decking
partially removable. Box of 10 clips with screws.

FINISHING ACCESSORIES




Fascia board:
Dimensions in mm:
70 x 20 x 2000
Available in the Elegance,
Emotion and
Atmosphere ranges.



Finishing board:
Dimensions in mm:
138 x 23 x 4000
or 180 x 23 x 4000
Available in the colours
of the Elegance and
Atmosphere range.




Invisiclip:
accessory used
to hide the clip.



Aluminium corner profile:
to enhance the edges
of your decking.
Dimensions in mm:
37 x 74 x 2000



Decking LED:
Dimensions in mm:
50 x 23 x 2000
(To be ordered with
the LED power supply)



**Free-standing
ground markers:**
Height 35 mm – Drilling diameter:
35 mm. Solar marker lighting
for your wood composite decking.
Waterproof to IP65.
Sold in boxes of 4

CLEANING PRODUCTS



**GREASY
STAINS**

Silvawash

- Clay-based cleaning product,
100% mineral origin.
- Especially for wood composite.
Absorbs greasy stains.
- To be used dry.
- Net weight: 200 g.



**GREEN DEPOSITS
AND LICHENS**

Silvaction

- Cleaning product for green
deposits and lichens
- Ready for use,
without rinsing
- Capacity: 5 litres



**STUBBORN
STAINS**

Silvanet

- Cleaning product for wood
composite boards.
- Removes incrustated stains.
- Capacity: 1 litre.


FENCING RANGE

CREATE YOUR OWN GARDEN STYLE

Natural Range

ELEGANCE FENCING BOARD

Create a custom panel or fencing with a selection of **REVERSIBLE** fencing boards (one smooth face and one grooved face).



Width 21 x 150 x 1783 mm
2 colours



ELEGANCE FENCING BOARD - ANTHRACITE GREY



ELEGANCE FENCING BOARD - EXOTIC BROWN

In harmony with your decking, Silvadec® wood composite fencing is practical and **suitable for any type of ground.**

Let your imagination take flight **with this modular product and its custom** accessories to give your fence a unique character!


Silvadec offers three types of fencing boards: the Elegance board (wood look), Atmosphere board (modern look, no colour variation and easy maintenance), and Aluminium board (option of openwork installation)

- ✓ REVERSIBLE BOARDS
- ✓ WIND TUNNEL TESTED, WITHSTANDS WINDS OF UP TO 120 KM/H
- ✓ THERMO-COATED ALUMINIUM POSTS, 10-YEAR QUALICOAT LABEL GUARANTEE

HIGH-TECH Range

ATMOSPHERE FENCING BOARD

Available **IN 4 COLOURS**, its fine finish gives it an original design and a warm touch.




Width 21x150x1783 mm
4 colours



✓ STAIN-RESISTANT AND EASY MAINTENANCE

ATMOSPHERE FENCING BOARD - ANTHRACITE GREY

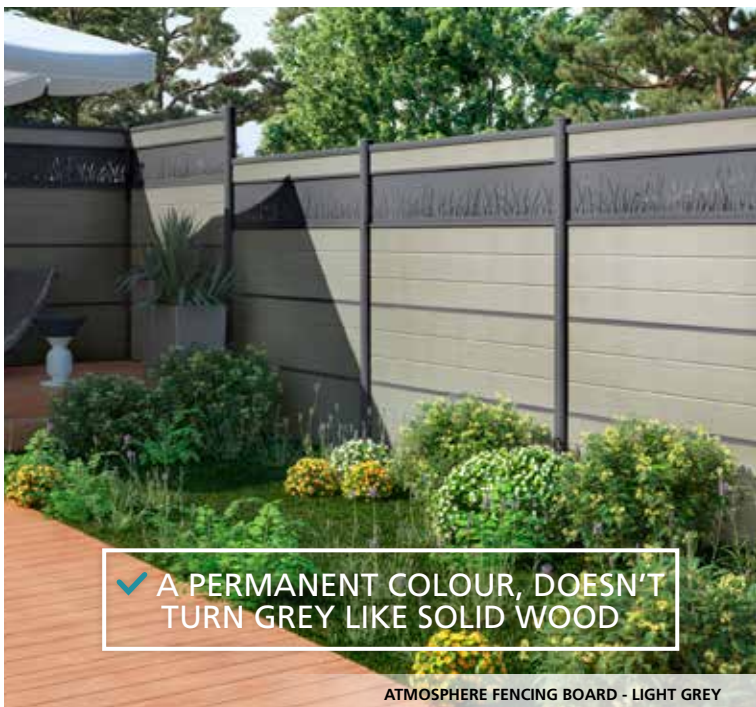

✓ A PERMANENT COLOUR, DOESN'T TURN GREY LIKE SOLID WOOD

ATMOSPHERE FENCING BOARD - LIGHT GREY

- ✓ "SOLID" OR OPENWORK INSTALLATION USING STACKABLE 15 mm STRUTS
- ✓ THERMO-COATED ALUMINIUM BOARD, GUARANTEED FOR 10 YEARS*
- ✓ RECYCLABLE BOARD
- ✓ EASY MAINTENANCE



Openwork aluminium fencing

HIGH-TECH Range

ALUMINIUM FENCING BOARD

The aluminium boards secure your outdoor space to create a private area, or to adorn your garden with a chic and durable decoration. They combine wonderfully with Silvadec® wood composite, and are compatible with all our aluminium accessories.



Dimensions
21 x 148 (146 stacked
useful) x 1797 mm
Smooth and sanded anthracite grey




Solid aluminium fencing



Openwork aluminium panel

CREATE YOUR FENCE WITH ELEGANCE OR ATMOSPHERE FENCING BOARDS

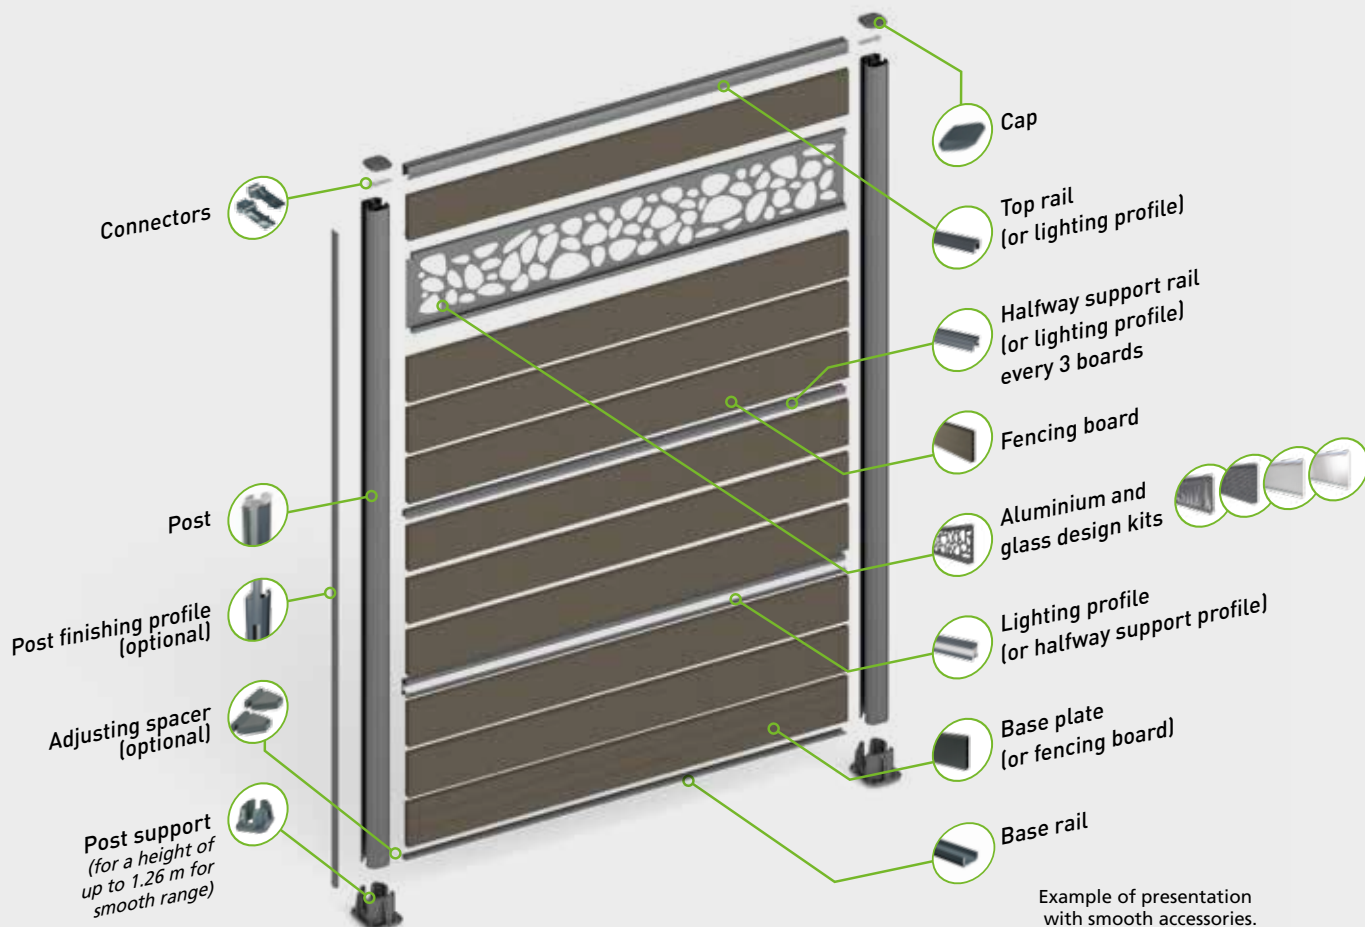

ACCESSORIES COLOURS SMOOTH FINISH:

- Anthracite grey (RAL 7015 gloss)
- Metal grey (RAL 9006 matt metallic)
- Brown (RAL 8025 MATT)

ACCESSORIES COLOURS SANDED FINISH:

- Sanded anthracite grey (RAL 7016 matt)
- Sanded metal grey (RAL 7042 matt)

ELEGANCE FENCING BOARDS

- Exotic brown
- Anthracite grey

ATMOSPHERE FENCING BOARDS (CO-EXTRUDED):

- Light brown
- Dark brown
- Light grey
- Anthracite grey

FENCING DESIGN PANELS


DISCOVER THE FENCING DESIGN PANELS, FOR A WELCOMING AND ELEGANT GARDEN ENVIRONMENT!

THE PLANT UNIVERSE



The aluminium plant design panel

With its slightly openwork design, this design panel promotes a feeling of well-being and intimacy.

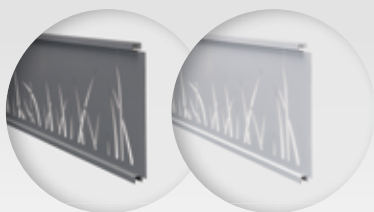


- Height 30 cm, replaces two fencing boards



Botanical panel

This is a new unique decorative panel that providing multiple options for "green" fencing. It can be built into Silvadec posts, and is supplied without the plants.




- Dimensions (wxh): 800x1800 mm

MINERAL



The aluminium mineral design panel

This panel has an attractive openwork design that allows light to shine through, bringing out a harmony of shapes.

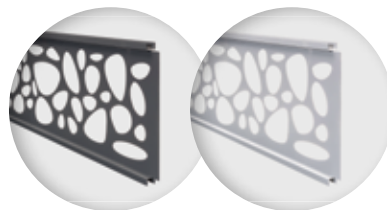

- Height 30 cm, replaces two fencing boards

Silvadec's design panels offer real solutions to meet your individual landscaping needs. They give your fencing a modern touch and allow you to personalise your garden. All aluminium design panels are available in **light grey and anthracite grey**, in both the **smooth and sanded versions**.

UNIVERSE



Galvanised steel mineral Gabion panel


Our panel can be built harmoniously into your Silvadec fencing. It is an ideal decorative element to enrich your garden.

Supplied without filling

Recommended grain size: 15x25 mm

- **Dimensions (wxh):** 800x1800 mm

4 stiffeners in "ladder" formation over the full height of the panel




CONTEMPORARY STYLE



Aluminium urban design panel

This design panel elegantly combines with the wood composite boards, creating a modern and refined style suitable for all outdoor environments.

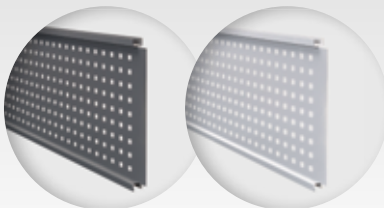


- Height 30 cm, replaces two fencing boards



Glass design panel

These glass design panels allow light to shine through, adding a bright and refined touch to your fencing.

Available in frosted (opaque) and transparent glass.

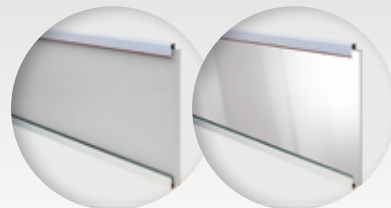

- Height 30 cm, replaces three fencing boards

LEDs



An ambient accessory to light up the decking or your fencing.

✓ **DESIGN IDEA:**
DECKING LED: use to mark a step.

LIGHTING PROFILE:
can replace a base rail to mark a path.

✓ FOR FENCING



FENCING POST LED
(to be ordered with an LED power supply)



Lighting profile
(to be ordered with an LED power supply)

✓ FOR DECKING




Decking LED
(to be ordered with an LED power supply)

To be ordered with the LED power supply, to which up to 3 LEDs can be connected

FENCING RANGE

OPTIONAL ACCESSORIES



Base plate:
Simplifies any installation on sloping ground, preventing any contact between the 1st board and the ground.
Dimensions: 21 x 153 x 1798 mm
Smooth and sanded anthracite grey
Sanded metal grey




Top rail connectors
They ensure post verticality and centre-to-centre distance and make installation easier.



Adjusting spacer:
used to raise the boards and adjust their level on an uneven surface.

ELEGANCE FENCING BOARDS



Exotic brown,
Anthracite grey


ATMOSPHERE FENCING BOARDS



Light brown, Dark brown,
Light grey, Anthracite grey

ALUMINIUM FENCING BOARD

NEW



Smooth and
sanded
anthracite grey




Bag of 22 x 15 mm stackable struts. Used to openwork aluminium fencing boards only. This accessory is not compatible with wood composite fencing boards.

FENCING RANGE

THERE ARE TWO RANGES OF ACCESSORIES TO PERSONALISE YOUR FENCING:

SMOOTH FINISH ACCESSORIES OR SANDED FINISH ACCESSORIES. HIGH-WIND POST, CORNER POST AND CAP


Post dimensions in mm: 70x35x1845
(smooth version and sanded version)
Cap dimensions in mm: 70x35 (smooth version and sanded version)
(Cap to be ordered separately)



NEW

Wall start semi-post with matching cap

Post dimensions in mm: 70 x 70 x 1260 and 70 x 70 x 2315 (smooth finish).
High-wind post dimensions (3 in 1) in mm: 70 x 64 x 1260 and 70 x 64 x 2315 (sanded finish).
Cap dimensions in mm: 70 x 70 (smooth finish).
Cap dimensions in mm: 65 x 70 (sanded finish).



High-wind post




Corner post

POST FINISHING PROFILE



Dimensions in mm: 27x9.5x1815
(smooth finish and sanded finish).


POST SUPPORT




Mounts the post on a concrete slab-type floor.

Use a post support to install smooth finish fencing
up to 1260 mm in height, and sanded finish fencing up to 1800 mm.
Dimensions in mm: 100x140x75 (for smooth finish).
108x133x83 (for sanded finish).

TOP RAILS, HALFWAY SUPPORT PROFILES AND BASE RAILS

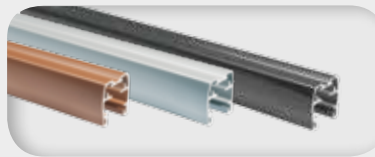

Placed onto the top of the fence.
Dimensions in mm:
40x38x1730 (for smooth finish).
40x38x1736 (for sanded finish).

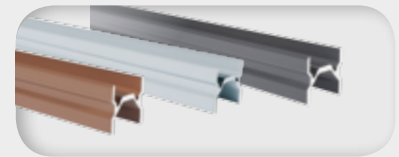

At least one halfway support profile must be inserted
for every three boards. Dimensions in mm:
23.3x24x1730 (for smooth finish).
23.3x24x1736 (for sanded finish).



To be positioned under the first board to support the fencing.
Dimensions in mm: 23.3x14x1730 (for smooth finish).
23.4x14x1736 (for sanded finish).

COLOURS OF SMOOTH FINISH ACCESSORIES

● Brown: RAL 8025 matt, ● Metal grey: RAL 9006 matt metallic, ● Anthracite grey: RAL 7015 gloss.

SANDED FINISH ACCESSORIES COLOURS


● Sanded metal grey: RAL 7042 matt, ● Sanded anthracite grey: RAL 7016 matt.

The photos present the smooth range accessories.

Natural Range

Range RAILING

SAFETY HAS NEVER
LOOKED SO GOOD



✓ LED LIGHTING
POSSIBLE



The railing is available in **TWO ELEGANCE BOARD COLOURS**: exotic brown and anthracite grey. **THE POSTS AND ACCESSORIES ARE SMOOTH ANTHRACITE GREY**

Strong and highly durable. Conforms to the French NF P 01-013 and NF P 01-012 standards and the European Eurocode EN1991-1-1* standard for classes A and B (Housing, residential and offices).

*based on National Annex NF P 06-11-2/A1.

✓ ABLE TO FOLLOW
SLOPES
UP TO 40 DEGREES

✓ CUSTOM ADJUSTABLE



HIGH-TECH Range

Cladding RANGE

GIVE YOUR FACADE STYLE



With Silvadec cladding, let your imagination **RUN FREE FOR PERSONALISATION WITHOUT MODERATION!** Aimed at private or commercial uses, our louver board will modernise the building's look and offers new solutions for cladding design.

To enhance its attractive look, this cladding offers a surprising range of **THE LATEST CONTEMPORARY COLOURS!**



* The terms of the warranty can be downloaded from the website at silvadec.com



Atmosphere
louver board
Light grey



Atmosphere
louver board
Anthracite grey



Atmosphere
louver board
Light brown





Atmosphere
louver board
Dark brown



Atmosphere
louver board
Cream white

The finishing accessories are available in the 5 board colours for “tone-on-tone” or contrasted surface cladding.

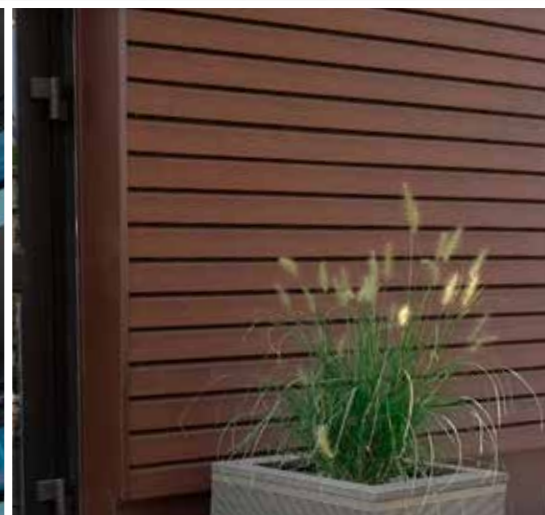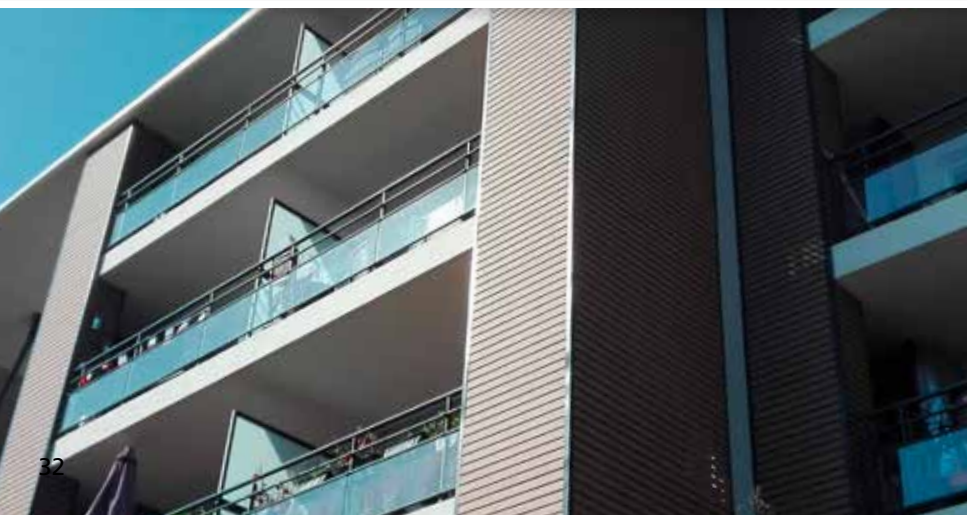

HIGH-TECH Range

The SUNSHADE

COMBINING AN ATTRACTIVE APPEARANCE
AND COMFORT!



COMFORTABLE!

A facade cladding product which enhances the comfort of your home, while regulating light and temperature.

PRACTICAL AND ATTRACTIVE!

Formed from wood composite and an aluminium reinforcement, the Silvadec® sunshade is a modular solution which is adaptable to different configurations.

LONG-LASTING!

Made from a mixture of recycled wood flour sourced from France (2/3) and high density polyethylene (1/3).

TECHNICAL CHARACTERISTICS

- Wood composite board, cross-section 50x80 mm and aluminium reinforcement section 30x20x2 mm.
- Colours: exotic brown and anthracite grey
- Coordinated finish cap

BOARD maintenance

FOR SILVADEC WOOD COMPOSITE DECKING AND FENCING



SILVADEC® WOOD COMPOSITE BOARDS DO NOT REQUIRE ANY SPECIAL PROTECTION (NO TREATMENT PRODUCT). REGULAR CLEANING IS ALL THAT IS REQUIRED TO KEEP THE BOARDS IN GOOD GENERAL CONDITION.

GENERAL MAINTENANCE RULES

Your decking should be washed once a year, ideally in the spring. Fencing panels should be cleaned twice a year.

Use a long-handled scrubbing brush - always scrub the boards lengthways. Wash with water and a diluted, mild detergent (washing-up liquid) - Clean the spaces between the decking boards using a metal blade to ensure proper water drainage.

AVOID:

- ❌ Do not use a high-pressure cleaner
- ❌ Do not use solvent
- ❌ Do not apply wood staining oil, paint or protective/restoration products to the boards.

HIGH-TECH RANGE

Thanks to its coating, the Atmosphere board provides effective and long-lasting protection against food stains on decking boards (grease), and against streaks and pollution traces in vertical use (fencing and cladding).

HIGH-TECH range boards must be cleaned once a year using a scrubbing brush, hot water and a diluted mild detergent (e.g. black soap). Using a high-pressure washer is not recommended, since depending on the conditions of use, this might alter the surface of the boards.

For more information, please consult our maintenance sheet at silvadec.com



CHECK OUT OUR SILVADEC WEBSITE



A central graphic promoting the Silvadec website. At the center is a desktop monitor displaying the Silvadec website, which features the headline "PARTENAIRES PROFESSIONNELS VIVEZ L'EXPÉRIENCE SILVADEC" and "UNE ENTREPRISE ÉCO RESPONSABLE". To the left of the monitor is a laptop showing a Facebook page, and to the right is a smartphone displaying a mobile version of the website. Five social media icons (LinkedIn, Facebook, Instagram, Twitter, and YouTube) are arranged in a semi-circle above the monitor, with blue lines connecting them to the website. Four inset images show various Silvadec products: a swimming pool with a dark frame, a modern outdoor chair, a wooden fence, and a set of white outdoor chairs. A QR code is located at the bottom right of the central graphic.

silvadec.com

✓ ALL OUR PRODUCTS

✓ ADVICE

✓ DESIGN IDEAS

DISTRIBUTOR



SILVADEC SAS

Parc d'activités de L'Estuaire
56190 Arzal
Tel. +33 (0)2 97 45 09 00
Fax. +33 (0)2 97 45 09 89
e-mail: info@silvadeec.com

CONTACT US

on Facebook  | on Youtube  | linked in  | instagram  | twitter 



Decking

Fencing

Railing

Cladding

silvadeec.com


Creating outdoor spaces