


Refer to Drawing LUC-10892-LD-PLN-301

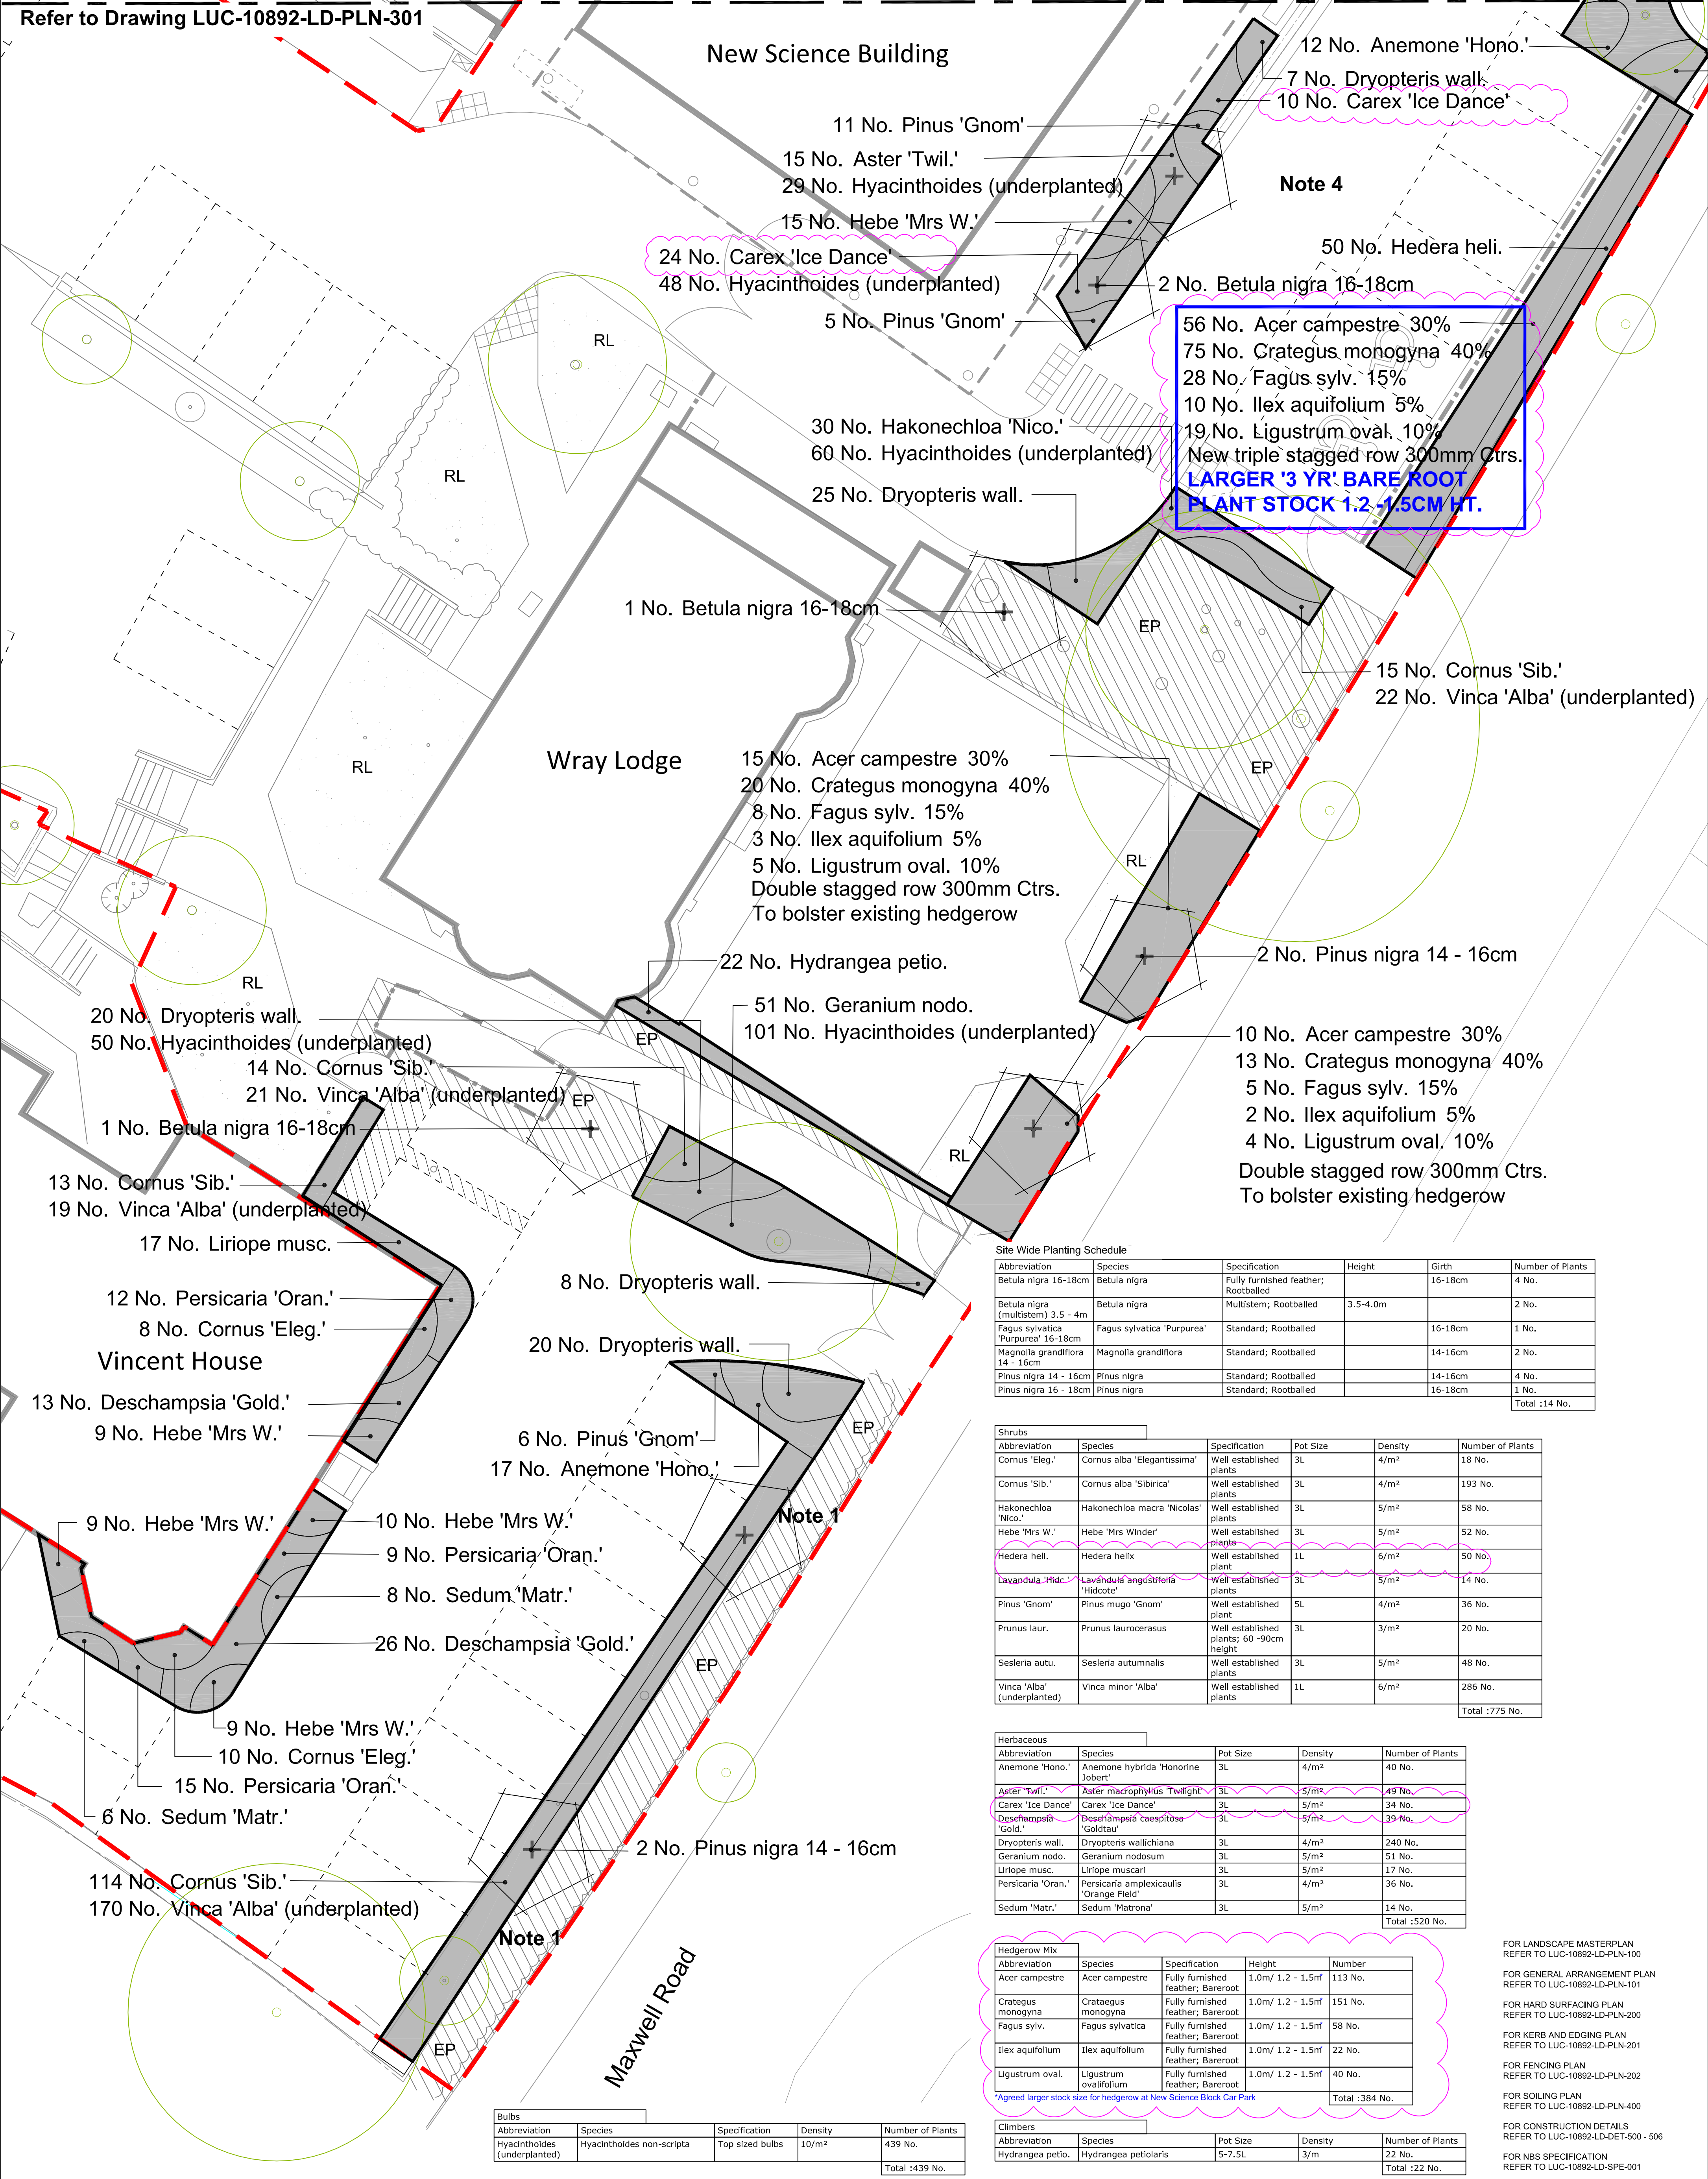

No.	Date	Description	Rev.	Chk.
F	03.02.23	Updated to show larger bare root plants to frontage of Maxwell Rd. Deschampsia substituted with Carex in main entrance plant bed.	TP	ET
E	16.12.20	Construction Issue	ET	AJ
D	20.10.20	Stage 4 Issue - Wray Lodge parking reduced, 8th enclosure fence lowered.	ET	AJ
C	06.07.20	Stage 4 Issue - minor updates following QS comments	TP	ET
B	17.06.20	Stage 4 Issue - for costing	TP	ET
A	05.06.20	Stage 4 Issue - for coordination	TP	ET
No.	Date	Description	Rev.	Chk.

Legend	
	Application boundary
	Existing trees retained
	Proposed trees refer to schedule for specification
	Proposed planting/hedgerow bed refer to schedule for specification
	Proposed green roof to Architect's specification
	Existing planting/ hedgerow retained
	Existing lawn retained

Drawing Notes	
1.	Existing hedgerow reduced in height to 1.5m high.
2.	Existing tree stump to be ground out, bare ground to be cultivated and then tufted.
3.	2 No. proposed trees to frontage of Old School to be underground guyed.
4.	Potential new 8lb taps to be installed to assist with watering of planting. Requirement to be considered by Client, with locations/ specification to M+E Engineer's design.
General Notes	
A.	Do not scale from this drawing.
B.	All dimensions are drawn in millimetres.
C.	Drawing & design copyright LUC.
D.	Reproduction of this drawing in whole or in part is prohibited without prior permission.

Cultivation & Planting Notes	
•	All imported topsoil to BS 3882; Multipurpose, sandy-loam classification. All soil certificates to be signed-off by CA prior to importation of soils. All imported subsoil (if required) to BS 8601:2013
•	Any stripping of existing soils must be done in accordance with best practice, must only take place in dry, warm conditions. Soil heaps to be no higher than 2.0m, soil to be fully aerated prior to re-use.
•	Soil decompaction: After spreading topsoil, the soil profile shall be ripped at 300mm centres to a min. depth of 600mm (for shrub beds, hedges) to decompact the soils and key in the topsoil and subsoil layers. Any large, compacted lumps of soil shall be broken down by further appropriate cultivation (in accordance with BS 4428) to produce a fine tilth suitable for planting (<30mm) to a depth of 300mm.
•	Cultivation: - Compacted topsoil broken up to full depth; - Loosen, aerate and break up soil into particles of 2-8 mm; - Timing: within a few days before planting; - Weather and ground conditions to be suitably dry; - Surface to be regular and even, 25mm above adjoining paving, 50mm above adjoining lawns; and min. 150mm below dpc of adjoining buildings; - Any undesirable material brought to the surface during this exercise shall be removed by picking or raking.
•	Shrub pits: wide enough to accom. roots when fully spread and 75mm deeper than root system. Pit bottom - break up to a depth of 150mm, incorporating 25g of slow release fertilizer per planting pit.
•	Tree pits: 1500x1500x950mm; horizontal bases/ vertical sides (scarified); pit bottom - slightly raised centre, broken up 200mm depth, soil ameliorant worked in; backfilling material - 350mm topsoil over 600mm subsoil.

•	Soil within root spread of trees and shrubs to be retained: Do not dig or cultivate. If additional imported soils required, all cultivation to be by hand only.
•	Application of fertilizer/ green compost dependent on findings of soil analysis.
•	Times of year for planting: trees and shrubs - late Oct to late March; evergreens - Sept to May; herbaceous plants - Sept - April; and bulbs - Sept - Nov.
•	All imported plant stock to be undamaged, sturdy, healthy and vigorous, suitably hardened off and free from pests, diseases and weeds.
•	Standard: The National Plant Specification.
•	Plant handling in accordance with HTA 'Handling and establishing landscape plants'.
•	Mulching of beds/ trees in grass - fine grade bark mulch, 50mm min. depth.
•	Supports: hedging plant protection - plastic transparent spiral guards, 600mm high, 50mm dia. single stake support; trees - two short stakes for all standards and underground guys for multistems.

FOR LANDSCAPE MASTERPLAN REFER TO LUC-10892-LD-PLN-100	
FOR GENERAL ARRANGEMENT PLAN REFER TO LUC-10892-LD-PLN-101	
FOR HARD SURFACING PLAN REFER TO LUC-10892-LD-DET-200	
FOR KERB AND EDGING PLAN REFER TO LUC-10892-LD-PLN-101	
FOR FENCING PLAN REFER TO LUC-10892-LD-PLN-202	
FOR SOILING PLAN REFER TO LUC-10892-LD-PLN-400	
FOR CONSTRUCTION DETAILS REFER TO LUC-10892-LD-DET-500 - 506	
FOR NBS SPECIFICATION REFER TO LUC-10892-LD-SPE-001	

LUC Bristol Colston Tower, Colston Street, Bristol, BS1 4XE +44 (0)117 929 1997 bristol@lucduse.co.uk www.lucduse.co.uk	
Project Northwood College For Girls	
Client Girls Day School Trust	
Scale @A1 1:100	Status For Construction
Drawing Title Detail Planting Plan (2 of 2)	
Job Nr 10892	Drawing Nr LUC-10892-LD-PLN-302
	Issue F