




VELUX®

Edition 3.0 – 01.07.2020

Product information
VELUX Top-hung pine roof window GPL

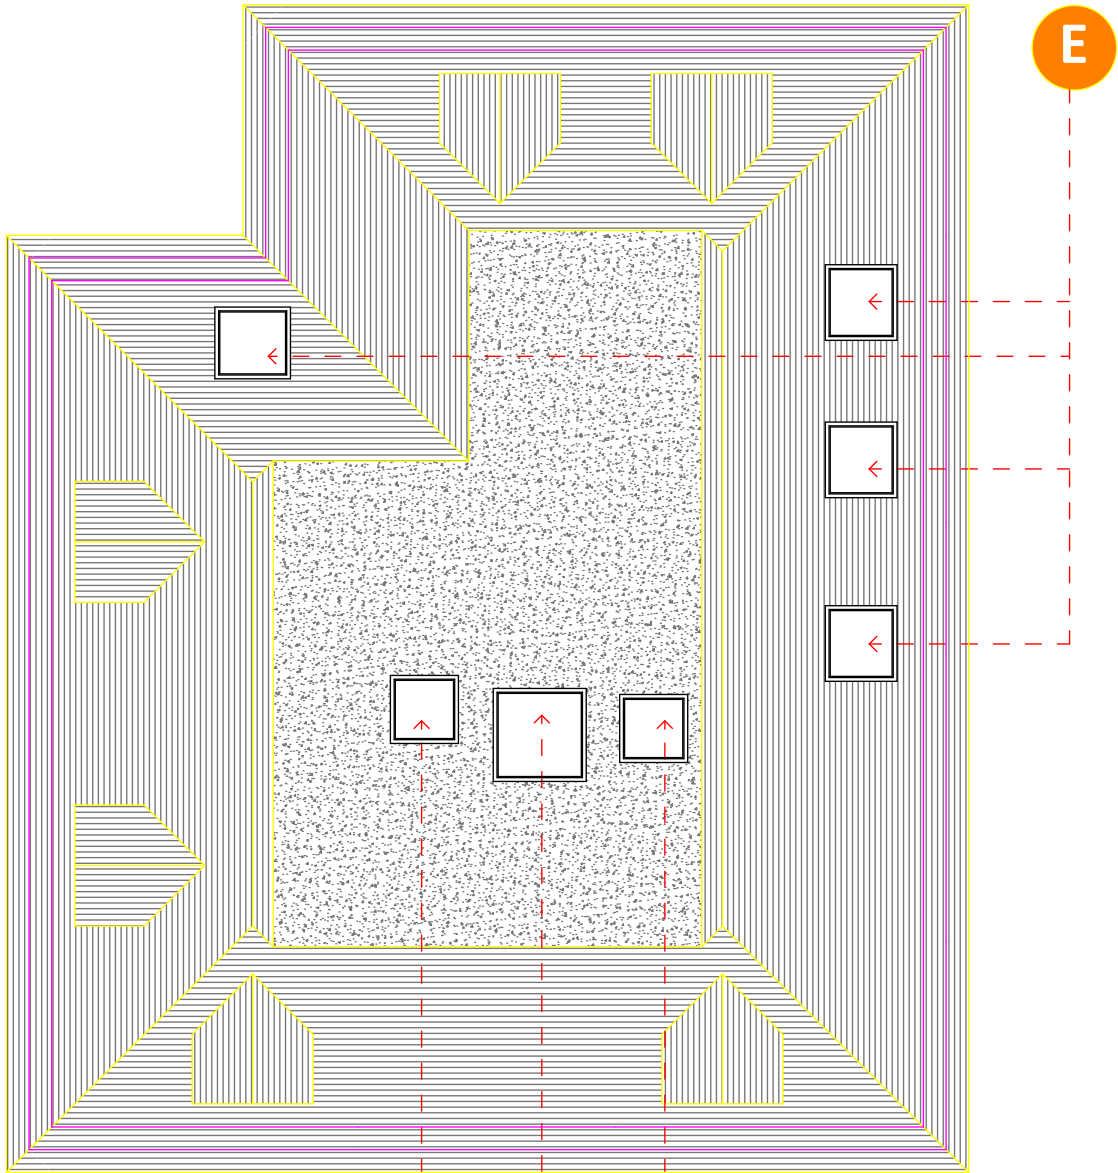

- Product description**
- High quality natural pinewood coated with impregnation and layers of water-based acrylic white paint or clear lacquer
 - The sash can remain open in any position up to an angle of 45°
 - Bottom handle for convenient operation
 - Ventilation flap and integrated dust and insect filter
 - Maintenance-free exterior covers
- Roof pitch**
- Can be installed in roof pitches between 15° and 55°
 - Installation in roof pitches from 55° up to 75° is possible, but specially manufactured springs must be ordered
- Materials**
- Laminated pinewood
 - Glass
 - Lacquered aluminium, copper or zinc
 - VELUX ThermoTechnology™ insulation

E Velux Windows: Grey

Exterior covers

Material	NCS standard colour	RAL nearest standard colour
Lacquered aluminium (-0--) grey	S 7500-N	7043
Lacquered aluminium (-5--) black	S 9000-N	9005
Copper (-1--)	-	-
Titanium zinc (-3--)	-	-



WEDRAWPLANS®

201 Borough High st.
London SE1 1JA
0203 6548508
0795 0606111
info@wedrawplans.com
www.wedrawplans.com

Project title:
47 Fairfield Road, UB8 1AZ

Drawing title: Plans

Client: S . Khakharia

Drawing no.: 971 / 05

Revision:

scale:
1:50@A1,1:100@A3