

Aggregate Test Certificate

Summerleaze Limited

7 Summerleaze Road
Maidenhead
Berkshire
SL6 8SP

Sample Reference:

22/1887

Source of Material:

Denham Quarry, Uxbridge
Road, Denham. UB9 4HE

Material Description: 4/10 GC85/20 BS EN 12620
Test Method EN 933-1

Date Sampled:

27 October 2022

Date Tested:


03 November 2022

Moisture Content:

4.46%

Sieve Size	Percentage Passing	Limits
20mm	100	100
14mm	100	98-100
10mm	92	85-99
4mm	3	0-20
2mm	1	0-5

Grading Curve

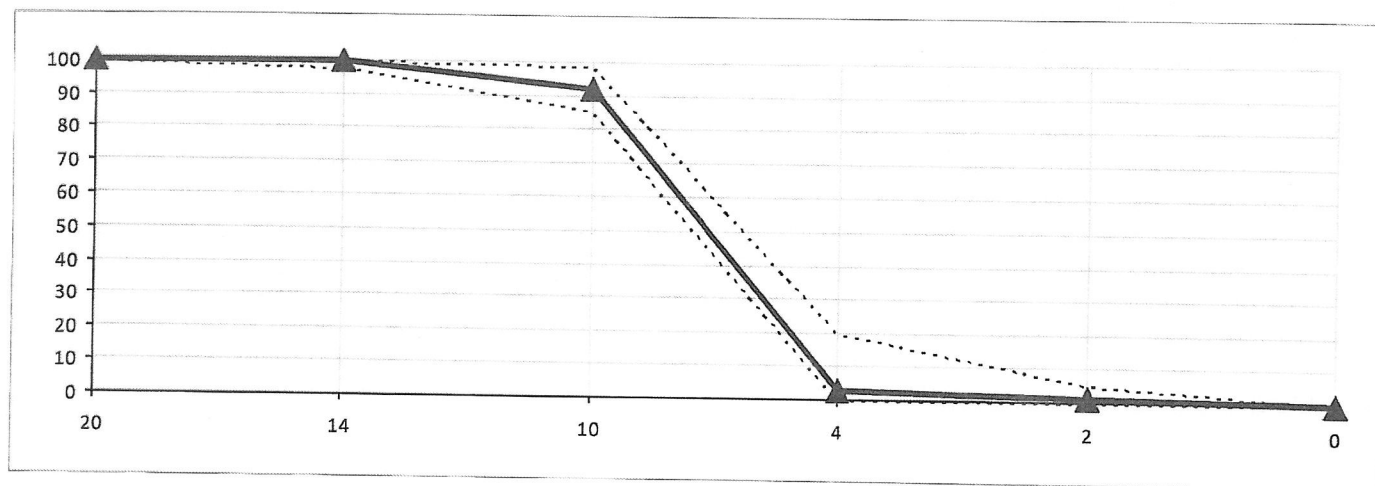

The material tested complies with BS EN 12620 grading requirements

Signed:

[Signature]

Date of issue: 03 November 2022

on behalf of Testing and Consultancy Services Ltd.