

# ProPave

ProPave is a gravel retention and grass reinforcement porous paver. Manufactured from recycled materials ProPave can offer flexible solutions for a range of applications.


## Suggested applications:

- Permanent or temporary
- Pedestrian areas
- Driveways
- Access
- Car parks
- Vehicle hardstanding

## ProPave features:

- Encourages drainage
- Simple installation process
- Alternative to concrete and tarmac surfaces
- Sympathetic to the natural environment

ProPave	
Nominal Dimensions	470 x 470 x 39mm
Modules per m <sup>2</sup>	4.5
Weight per m <sup>2</sup>	4.4 kg/m
Colour	Black
Cells per module	49no
Material	PP/PE recycled
Load-bearing Capacity	400 T/m <sup>2</sup> (based on compressive testing with gravel infill)
Fixings	Integrated Spike - 25mm Overall height with integrated spike - 64mm
Wall thickness	3-5mm
Green area	80%

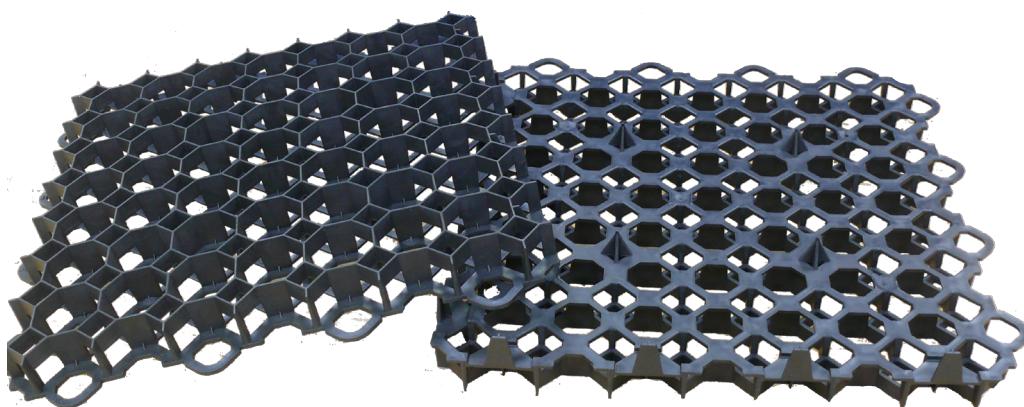

**For more information on ProPave or Geosynthetics Limited  
please contact our sales office on 01455 617139**