

## **TIME TABLE FOR IMPLEMENTATION**

Within 28 days of discharge of planning condition.

### **REFUSE STORE**

Supplier: The Bike Shed Co.

Product: 2 no. Trio bin stores to fit 3 no. 240l bins in each.

Colour: Zinc Grey




The Bin Stores are designed to be used as stand alone units, or joined to our Pedalbase models, as they share the same low, unobtrusive profile. The design allows the lid to be lifted without opening the doors, for easy access when using the bins. For storing recycling boxes, simply add the shelving option – they take the space of one wheelie bin.



# BIN STORES

THE  
BIKE SHED  
C°

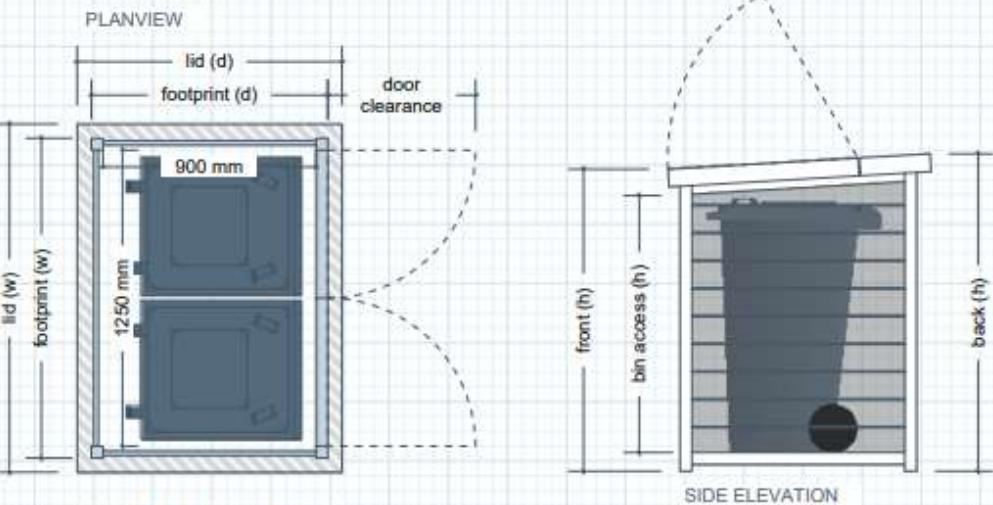

Designed for 240L Wheeble Bins

Doors can be opened and bin removed without lifting the lid. The lid is hinged & have gas struts to assist with lifting, allowing access to the bins in situ.

BIN STORE	FOOTPRINT		LID		HEIGHT		INTERNAL			DOOR CLEARANCE	
	WIDTH	DEPTH	WIDTH	DEPTH	FRONT	BACK	BIN ACCESS HEIGHT	WIDTH	DEPTH	STD DOORS	BIFOLD DOORS
UNO	750	1000	870	1120	1275	1340	1090	650	915	650	-
DUO	1350	1000	1470	1120	1275	1340	1090	1250	915	640	-
TRIO	2000	1000	2120	1120	1275	1340	1090	1900	915	965	475

All timber is UK Grown Kiln Dried Douglas Fir.  
Exterior High Grade Plywood Floor (Painted), Shelf & Roof.  
Tough, Flexible EPDM Rubber Roof Membrane

Hardware included in all Roll-in Models:

- Adjustable Metal Feet
- Gas Strut Stay
- Stainless Steel Hinges
- Strong Door Drop Bolts
- Black Metal Handles & Thumb Turn

SOLID BASE REQUIRED			TYPES OF BASE:	
	WIDTH	DEPTH	<ul style="list-style-type: none"> <li>• Concrete Pad</li> <li>• Eco Grid &amp; Shingle</li> <li>• Paving Slabs/Brick</li> <li>• Tarmac/Resin Bound Surfacing</li> </ul>	
UNO	850	1100		
DUO	1450	1100		
TRIO	2100	1100		

Unsuitable Bases include soil or loose shingle - anything that is not compact & solid.

## BIKE STORE

Supplier: The Bike Shed Co.

Product: 2 no. Roll in 4 bike store to fit 4 no. bikes in each.

Colour: Zinc Grey




The Roll-in comes with a wheel rack keeping the bikes upright and in their own place. Each bike can be reached without moving others. As with all of our bike sheds, we offer a number of additional security measures to fully protect your bikes within.



Colour: Zinc Grey

# ROLL-IN RANGE

THE  
BIKE SHED  
C°

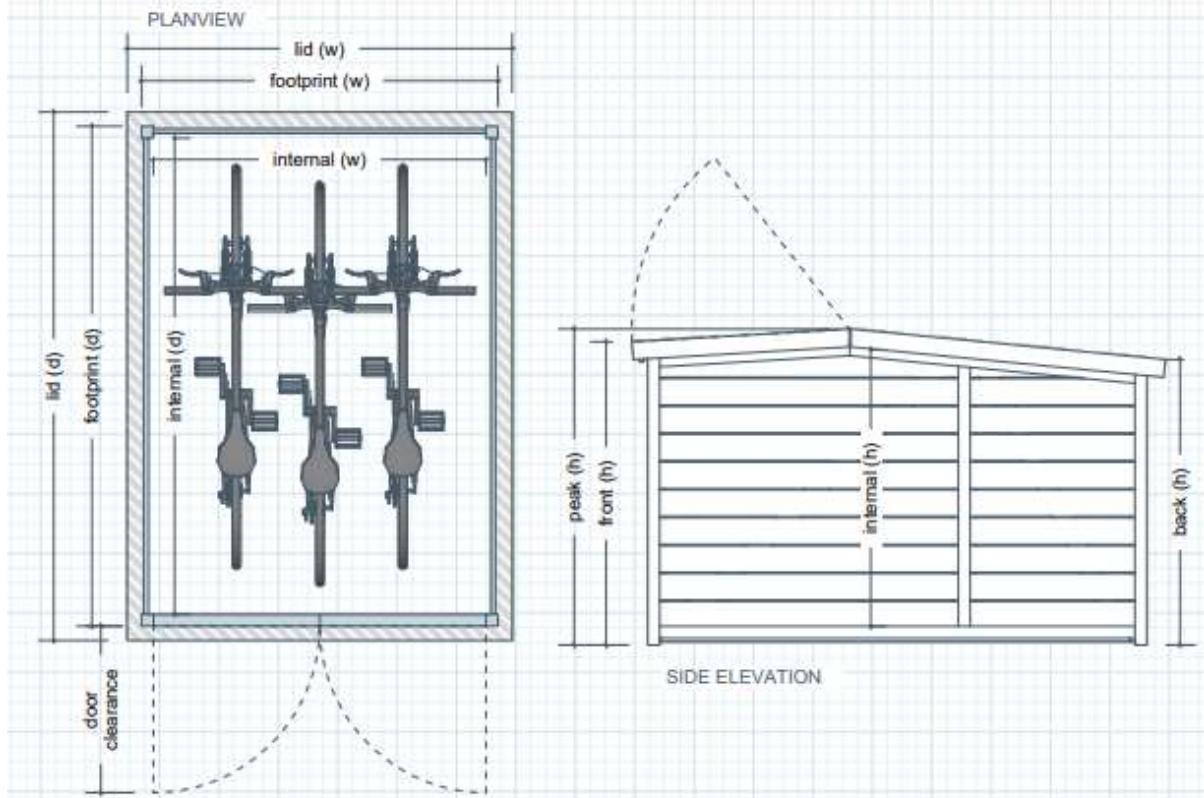

ROLL-IN	FOOTPRINT		LID		HEIGHT			INTERNAL			DOOR CLEARANCE	
	WIDTH	DEPTH	WIDTH	DEPTH	BACK	FRONT	PEAK	HEIGHT	WIDTH	DEPTH	STD DOORS	BIFOLD DOORS
3	1500	2100	1620	2245	1200	1275	1330	1140	1400	2000	715	-
4	1800	2100	1920	2245	1200	1275	1330	1140	1700	2000	865	425
5	2100	2100	2220	2245	1200	1275	1330	1140	2000	2000	1015	500
6	2400	2100	2520	2245	1200	1275	1330	1140	2300	2000	-	575

All timber is UK Grown Kiln Dried Douglas Fir.  
Exterior High Grade Plywood Floor (Painted), Shelf & Roof.  
Tough, Flexible EPDM Rubber Roof Membrane

Hardware included in all Roll-in Models:

- Adjustable Metal Feet
- Gas Strut Stays
- Stainless Steel Hinges
- Strong Door Drop Bolts
- Heavy Duty Hasp & Staple
- Anti-Tampering Plate
- Round Shackleless Padlock

SOLID BASE REQUIRED			TYPES OF BASE:	
ROLL-IN	WIDTH	DEPTH		
3	1600	2200	<ul style="list-style-type: none"> <li>• Concrete Pad</li> <li>• Eco Grid &amp; Shingle</li> <li>• Paving Slabs/Brick</li> <li>• Tarmac/Resin Bound Surfacing</li> </ul>	
4	1900	2200		
5	2200	2200		
6	2500	2200	Unsuitable Bases include soil or loose shingle - anything that is not compact & solid.	