

## **TIME TABLE FOR IMPLEMENTATION**

Within 28 days of discharge of planning condition.

### **BIKE STORE**

Supplier: The Bike Shed Co.

Product: 2 no. Roll in 4 bike store to fit 4 no. bikes in each.

Colour: Zinc Grey




The Roll-in comes with a wheel rack keeping the bikes upright and in their own place. Each bike can be reached without moving others. As with all of our bike sheds, we offer a number of additional security measures to fully protect your bikes within.



Colour: Zinc Grey

# ROLL-IN RANGE

THE  
BIKE SHED  
C°

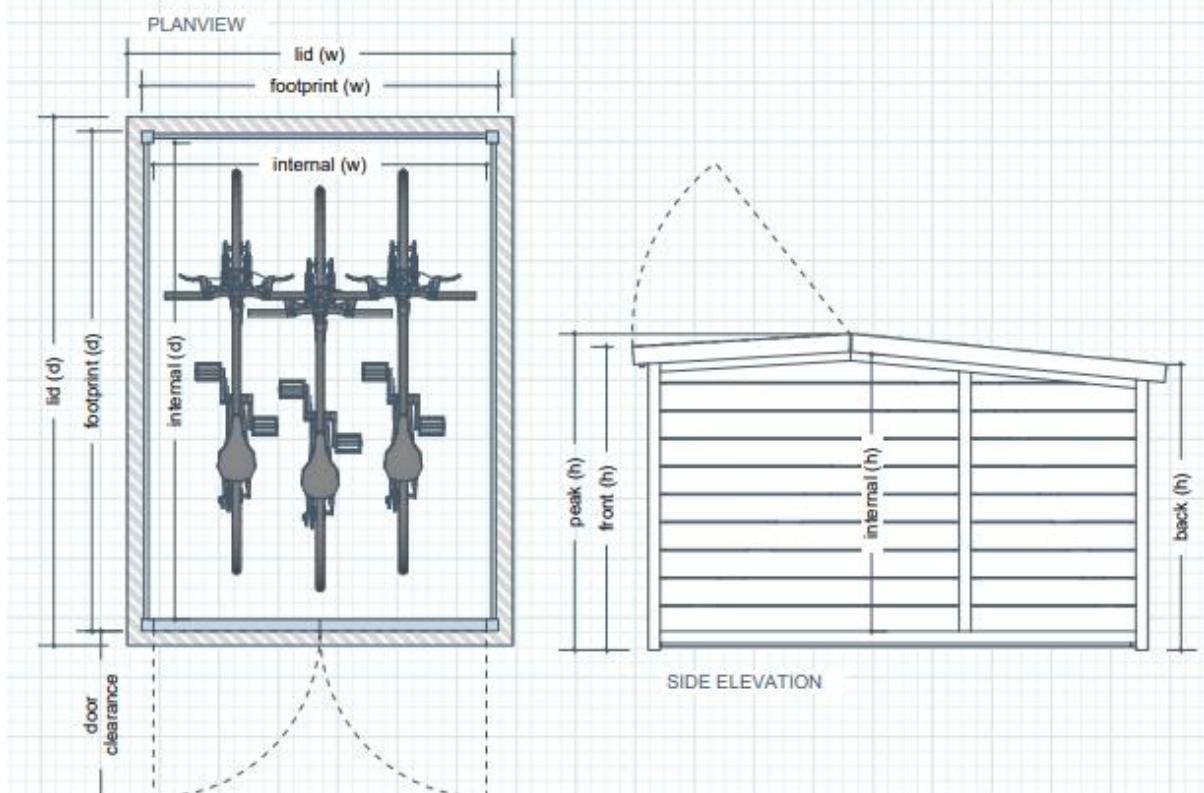

ROLL-IN	FOOTPRINT		LID		HEIGHT			INTERNAL			DOOR CLEARANCE	
	WIDTH	DEPTH	WIDTH	DEPTH	BACK	FRONT	PEAK	HEIGHT	WIDTH	DEPTH	STD DOORS	BIFOLD DOORS
3	1500	2100	1620	2245	1200	1275	1330	1140	1400	2000	715	-
4	1800	2100	1920	2245	1200	1275	1330	1140	1700	2000	865	425
5	2100	2100	2220	2245	1200	1275	1330	1140	2000	2000	1015	500
6	2400	2100	2520	2245	1200	1275	1330	1140	2300	2000	-	575

All timber is UK Grown Kiln Dried Douglas Fir.  
Exterior High Grade Plywood Floor (Painted), Shelf & Roof.  
Tough, Flexible EPDM Rubber Roof Membrane

Hardware included in all Roll-in Models:

- Adjustable Metal Feet
- Gas Strut Stays
- Stainless Steel Hinges
- Strong Door Drop Bolts
- Heavy Duty Hasp & Staple
- Anti-Tampering Plate
- Round Shackless Padlock

SOLID BASE REQUIRED			TYPES OF BASE:	
ROLL-IN	WIDTH	DEPTH	<ul style="list-style-type: none"> <li>• Concrete Pad</li> <li>• Eco Grid &amp; Shingle</li> <li>• Paving Slabs/Brick</li> <li>• Tarmac/Resin Bound Surfacing</li> </ul>	
3	1600	2200		
4	1900	2200		
5	2200	2200		
6	2500	2200	Unsuitable Bases include soil or loose shingle - anything that is not compact & solid.	