

Groceries Online (GOL) Facility – Uxbridge



Air Quality Assessment

784-A117904
19th May 2021

PRESENTED TO

Sainsbury's Supermarkets Limited

PRESENTED BY

NALO, Tetra Tech
Executive Park,
Avalon Way,
Anstey,
Leicester,
LE7 7GR

P: +44 (0)116 234 8000
E: NALO.UK@tetrattech.com
tetrattech europe.com

DOCUMENT CONTROL

Document:	Air Quality Assessment
Project:	Groceries Online (GOL) Facility - Uxbridge
Client:	Sainsbury's Supermarkets Limited
Job Number:	784-A117904
File Origin:	O:\Acoustics Air Quality and Noise\Fee Earning Projects

Revision:	-	Status:	First Issue
Date:	19 th May 2021		
Prepared by: Donald Towler-Tinlin Environmental Scientist		Checked by Matthew Smith Principal Environmental Consultant	Approved By: Nigel Mann Director
Description of revision:			

Revision:		Status:	
Date:			
Prepared by:		Checked by:	Approved By:
Description of revision:			

Revision:		Status:	
Date:			
Prepared by:		Checked by:	Approved By:
Description of revision:			

EXECUTIVE SUMMARY

This report presents the findings of an air quality assessment undertaken to assess road traffic emissions in support a planning application for a proposed grocery online (GOL) facility located at the existing Sainsbury's store at York Road, Uxbridge, UB8 1QW.

Construction Phase

The potential effects during the demolition and construction phases include fugitive dust emissions from site activities, such as earthworks, construction and trackout. The impacts during the operational phase take into account exhaust emissions from additional road traffic generated due to the proposed development.

During the construction phase, site specific mitigation measures detailed within this assessment will be implemented. With these mitigation measures in place, the effects from the construction phase are not predicted to be significant.

Operational Phase

Detailed dispersion modelling of traffic pollutants has been undertaken for the proposed development. An operational year assessment for 2022 traffic emissions has been undertaken to assess the effects of the Proposed Development. The impacts during the operational phase take into account exhaust emissions from additional road traffic generated due to the proposed development.

The long-term (annual) assessment of the effects associated with the proposed development with respect to Nitrogen Dioxide (NO₂) is determined to be 'negligible'. With respect to PM₁₀ and PM_{2.5} exposure, the effect is determined to be 'negligible' at all identified existing sensitive receptor locations.

All existing receptor locations are expected to be exposed to air quality below the Air Quality Objectives for NO₂, PM₁₀ and PM_{2.5}.

TABLE OF CONTENTS

1.0 INTRODUCTION	8
1.1 Site Location	8
1.2 Context	8
1.3 Report Structure	9
2.0 POLICY AND LEGISLATIVE CONTEXT	10
2.1 Documents Consulted	10
2.2 Air Quality Legislative Framework	11
2.3 Planning And Policy Guidance	13
3.0 ASSESSMENT METHODOLOGY	19
3.1 Determining Impact Description Of The Air Quality Effects	19
4.0 BASELINE CONDITIONS	21
4.1 Air Quality Review	21
4.2 Meteorology	25
4.3 Emission Sources	26
4.4 Sensitive Receptors	26
4.5 Ecological Receptors	27
5.0 ASSESSMENT OF AIR QUALITY IMPACTS - CONSTRUCTION PHASE	30
5.1 Pollutant Sources	30
5.2 Particulate Matter (PM ₁₀)	30
5.3 Dust	30
5.4 Methodology	31
5.5 Assessment Results	31
6.0 ASSESSMENT OF AIR QUALITY IMPACTS - OPERATIONAL PHASE	33
6.1 Existing And Predicted Traffic Flows	33
6.2 Background Concentrations	34
6.3 Model Verification	37
6.4 ADMS-Roads Model Inputs	39
6.5 ADMS Modelling Results	39
6.5.1 Traffic Assessment	39
6.5.2 Assessment Scenarios	39
6.5.3 Operational Traffic Assessment	40
7.0 AIR QUALITY NEUTRAL	48
7.1 Benchmark Emissions	48
7.2 Transport Emissions Benchmarks	49
7.3 Transport Emissions Benchmarks	49

7.4 Summary Of Air Quality Neutral Assessment	51
8.0 MITIGATION.....	52
8.1 Construction Phase.....	52
9.0 CONCLUSIONS	55

LIST OF TABLES

Table 2-1. Air Quality Standards, Objectives, Limits and Target Values	12
Table 2-2. Ecological Air Quality Standards, Objectives, Limit and Target Values	12
Table 3-1. Impact Descriptors for Individual Receptors	20
Table 4-1. Local Authority AQMA Details.....	21
Table 4-2. Monitored Annual Mean NO ₂ Concentrations at Automatic Monitoring Locations	22
Table 4-3. Monitored Annual Mean NO ₂ Concentrations at Diffusion Tubes	22
Table 4-4. Modelled Sensitive Receptor Locations.....	27
Table 6-1. Dust Emission Magnitude	31
Table 6-2. Sensitivity of the Area	31
Table 6-3. Impact Description of Construction Activities without Mitigation.....	32
Table 6-1. Traffic Data.....	34
Table 6-2. Published Background Air Quality Levels (µg/m ³)	35
Table 6-3. Pollutant Source Apportionment of NO _x (µg/m ³)	36
Table 6-4. Utilised Background Concentrations (µg/m ³).....	37
Table 6-5. Comparison of Roadside Modelling & Monitoring Results for NO ₂	38
Table 6-6. Summary of ADMS Roads Model Inputs	39
Table 6-7. Predicted Annual Average Concentrations of NO ₂ at Receptor Locations.....	40
Table 6-8. Impact Description of Effects at Key Receptors (NO ₂)	43
Table 6-9. Predicted Annual Average Concentrations of PM ₁₀ at Receptor Locations	44
Table 6-10. Impact Description of Effects at Key Receptors (PM ₁₀)	45
Table 6-11. Predicted Annual Average Concentrations of PM _{2.5} at Receptor Locations	46
Table 6-12. Impact Description of Effects at Key Receptors (PM _{2.5})	47
Table 7-1. Building Emissions Benchmarks.....	49
Table 7-2. Transport Emissions Benchmarks	49
Table 7-3. Transport Emissions Land Use Class and Development Trips	50
Table 7-4. Average Distance Travelled by Car per Trip.....	50
Table 7-5. Emission Factors	50
Table 7-6. Calculation of Benchmarked NO _x emissions Using Transport Emissions Benchmarks for Each Land-use Category	50
Table 7-7. Calculation of Air Quality Neutral Transport Emissions	51
Table 9-1. IAQM Guidance on the Assessment of Dust from Demolition and Construction ‘Highly Recommended’ Mitigation Measures	52
Table 9-2. IAQM Guidance on the Assessment of Dust from Demolition and Construction ‘Desirable’ Mitigation Measures.....	53

LIST OF FIGURES

Figure 1-1. Satellite Image of Site and Surrounding Area	8
Figure 4-1. Local Authority Monitoring Locations	24
Figure 4-2. Heathrow Airport 2019 Wind Rose.....	25
Figure 4-3. Sensitive Receptor Locations.....	29
Figure 6-1. Total Long Term Annual Average Nitrogen Dioxide (NO ₂) Concentration Across the Study Area (µg/m ³)	42
Figure A-1 Air Quality Assessment Area	57

APPENDICES

APPENDIX A - FIGURES	56
APPENDIX B - CONSTRUCTION PHASE ASSESSMENT METHODOLOGY	58
APPENDIX C - THEORETICAL SCENARIO (NO REDUCTION IN UK FLEET EMISSIONS OVER TIME) RESULTS	62
APPENDIX D - REPORT TERMS & CONDITIONS	68

ACRONYMS/ABBREVIATIONS

Acronyms/Abbreviations	Definition
AADT	Annual Average Daily Traffic
ADMS	Atmospheric Dispersion Modelling Software
AQAL	the Air Quality Assessment Level
AQAP	Air Quality Action Plan
AQMA	Air Quality Management Area
AQO	Air Quality Objectives
AQS	Air Quality Standards
CHP	Combined Heat and Power
CL	Critical Level
CO	Carbon Monoxide
DEFRA	Department for Environment Food & Rural Affairs
EAL	Environmental Assessment Limits
EC	European Commission
EFT	The Emissions Factors Toolkit
EPUK	Environmental Protection UK
EU	European Union
EPAQS	The Expert Panel on Air Quality Standards
IAQM	The Institute of Air Quality Management
LA	Local Authority
LAQM	Local Air Quality Management
NGR	The United Kingdom National Grid Reference
NO	Nitric Oxide
NO ₂	Nitrogen Dioxide
PC	Process Contribution
MHCLG	the Ministry for Housing, Communities and Local Government
NPPF	The National Planning Policy Framework
OS	the UK Ordnance Survey
PEC	Predicted Environment Concentration
PPG	Planning Policy Guidance
PPS	Planning Policy Statements
SAC	Special Areas of Conservation
SPA	Special Protection Area
SSSI	Sites of Special Scientific Interest
VOC	Volatile organic compounds
WHO	World Health Organization
UK	The United Kingdom

1.0 INTRODUCTION

This report presents the findings of an air quality assessment undertaken to assess road traffic emissions in support a planning application for a proposed grocery online (GOL) facility located at the existing Sainsbury's store at York Road, Uxbridge, UB8 1QW.

1.1 SITE LOCATION

The central Grid Reference is approximately 505854, 184406. The application site is bounded to the north by Belmont Road and residential properties beyond, to the East by Hermitage Primary School and residential properties, to the south by railway lines and to the west by commercial and residential properties.

Reference should be made to **Figure 1-1** for a map of the application site and surrounding area.

Figure 1-1. Satellite Image of Site and Surrounding Area



Google Imagery (2021)

1.2 CONTEXT

The primary source of the air quality associated with the proposed scheme is from vehicle movements, arriving and departing the proposed development. The traffic data generated by the has been assessed at the surrounding sensitive receptors and proposed sensitive receptors.

The following assessment stages have been undertaken as part of this assessment:

- Baseline evaluation;
- Assessment of potential air quality impacts during the construction phase;
- Assessment of potential air quality impacts during the operational phase;
- Air Quality Neutral Assessment;

- Identification of mitigation measures (as required).

The results of the assessment are detailed in the following sections of this report.

The construction phase assessment considers the potential effects of dust and particulate emissions from site activities and materials movement using a qualitative risk assessment method based on the Institute of Air Quality Management's (IAQM) 'Guidance on the Assessment of Dust from Demolition and Construction' document, published in 2014.

The assessment of the potential air quality impacts that are associated with the operational phase has focused on the predicted impact of changes in ambient nitrogen dioxide (NO₂) and particulate matter with an aerodynamic diameter of less than 10 µm (PM₁₀) and less than 2.5 µm (PM_{2.5}) as a result of the development at key local receptor locations. The changes have been referenced to EU air quality limits and UK air quality objectives and the magnitude and impact description of the changes have been referenced to non-statutory guidance issued by the IAQM and Environmental Protection UK (EPUK).

1.3 REPORT STRUCTURE

Following this introductory section, the remainder of this report is structured as follows:

- Section 2: Policy and Legislative Context
- Section 3: Assessment Methodology
- Section 4: Baseline Conditions
- Section 5: Assessment of Air Quality Impacts – Construction Phase
- Section 6: Assessment of Air Quality Impacts – Operational Phase
- Section 7: Air Quality Neutral Assessment
- Section 8: Mitigation
- Section 9: Conclusions

All technical Appendices are included at the end of this report for information.

2.0 POLICY AND LEGISLATIVE CONTEXT

2.1 DOCUMENTS CONSULTED

The following documents were consulted during the undertaking of this assessment:

Legislation and Best Practice Guidance

- National Planning Policy Framework, Ministry for Housing, Communities and Local Government, Revised February 2019;
- Planning Practice Guidance: Air Quality, Ministry for Housing, Communities and Local Government, November 2019;
- The Air Quality Standards Regulations (Amendments), 2016;
- The Air Quality Strategy for England, Scotland, Wales and Northern Ireland, Defra, 2007;
- The Environment Act, 1995;
- London Local Air Quality Management Technical Guidance LLAQM.TG19, Mayor of London, 2019;
- Design Manual for Roads and Bridges, Volume 11, Section 3, Part 1, LA 105 Air quality, Highways England, November 2019;
- Land-Use Planning & Development Control: Planning for Air Quality, EPUK & IAQM, 2017;
- Guidance on the Assessment of Dust from Demolition and Construction, IAQM, 2014;
- A Guide to the Assessment of Air Quality Impacts on Designated Nature Conservation Sites (Version 1.0), IAQM, May 2020;
- Ecological Assessment of Air Quality Impacts, CIEEM, January 2021;
- London Plan Supplementary Planning Guidance (SPG) 'The Control of Dust and Emissions during Construction and Demolition', July 2014;
- Greater London Authority (GLA) London Environment Strategy, May 2018;
- Greater London Authority (GLA) The London Plan, March 2021;
- Greater London Authority, Sustainable Design & Construction Supplementary Planning Guidance, April 2014; and,
- Air Quality Neutral Planning Support Guidance, Greater London Authority, 2014.

Websites Consulted

- Google maps (maps.google.co.uk);
- The UK National Air Quality Archive (www.airquality.co.uk);
- Department for Transport Matrix (www.dft.gov.uk/matrix);
- emapsite.com;
- Multi-Agency Geographic Information for the Countryside (<http://magic.defra.gov.uk/>);
- Planning Practice Guidance (<http://planningguidance.planningportal.gov.uk/>); and,
- London Borough of Hillingdon (<https://www.hillingdon.gov.uk/>).

Site Specific Reference Documents

- London Borough of Hillingdon, Air Quality Annual Status Report, 2019;

- London Borough of Hillingdon, Local Plan, A Vision for 2026 (Adopted November 2012); and,
- London Borough of Hillingdon, Air Quality Action Plan, 2019-2024.

2.2 AIR QUALITY LEGISLATIVE FRAMEWORK

European Legislation

European air quality legislation is consolidated under Directive 2008/50/EC, which came into force on 11th June 2008. This Directive consolidates previous legislation which was designed to deal with specific pollutants in a consistent manner and provides new air quality objectives for fine particulates. The consolidated Directives include:

- **Directive 1999/30/EC** – the First Air Quality "Daughter" Directive – sets ambient air limit values for NO₂ and oxides of nitrogen, sulphur dioxide, lead and PM₁₀;
- **Directive 2000/69/EC** – the Second Air Quality "Daughter" Directive – sets ambient air limit values for benzene and carbon monoxide; and,
- **Directive 2002/3/EC** – the Third Air Quality "Daughter" Directive – seeks to establish long-term objectives, target values, an alert threshold and an information threshold for concentrations of ozone in ambient air.

The fourth daughter Directive was not included within the consolidation and is described as:

- **Directive 2004/107/EC** – sets health-based limits on polycyclic aromatic hydrocarbons, cadmium, arsenic, nickel and mercury, for which there is a requirement to reduce exposure to as low as reasonably achievable.

The European Commission (EC) Directive Limits, outlined above, have been transposed in the UK through the Air Quality Standards Regulations. In the UK responsibility for meeting ambient air quality limit values is devolved to the national administrations in Scotland, Wales and Northern Ireland.

The European Union (Withdrawal) Act 2018 (EUWA) provides a new framework for the continuity of 'retained EU law' in the UK. EU Directives no longer have to be implemented by the UK except to any extent agreed or decided by the UK unilaterally.

EUWA retains the domestic effect of EU Directives to the extent already implemented in UK law, by preserving the relevant domestic implementing legislation enacted in UK law before 'Implementation Period' completion day. Though the EU Directives are not retained, following the UK's departure from the EU, the EUWA converts the current framework of Air Quality targets, however the role that the EU instructions were party to are lost.

UK Legislation

The Air Quality Standards Regulations (Amendments 2016) seek to simplify air quality regulation and provide a new transposition of the Air Quality Framework Directive, First, Second and Third Daughter Directives and also transpose the Fourth Daughter Directive within the UK. The Air Quality Limit Values are transposed into the updated Regulations as Air Quality Standards, with attainment dates in line with the European Directives. SI 2010 No. 1001, Part 7 Regulation 31 extends powers, under Section 85(5) of the Environment Act (1995), for the Secretary of State to give directions to Local Authorities (LAs) for the implementation of these Directives.

The UK Air Quality Strategy is the method for implementation of the air quality limit values in England, Scotland, Wales and Northern Ireland and provides a framework for improving air quality and protecting human health from the effects of pollution.

For each nominated pollutant, the Air Quality Strategy sets clear, measurable, outdoor air quality standards and target dates by which these must be achieved; the combined standard and target date is referred to as the Air Quality Objective (AQO) for that pollutant. Adopted national standards are based on the recommendations of the Expert Panel on Air Quality Standards (EPAQS) and have been translated into a set of Statutory Objectives within the Air Quality (England) Regulations (2000) SI 928, and subsequent amendments.

The AQOs for pollutants included within the Air Quality Strategy and assessed as part of the scope of this report are presented in **Table 2-1** and **Table 2-2** along with European Commission (EC) Directive Limits and World Health Organisation (WHO) Guidelines. The ecological levels are based on WHO and CLRTAP (Convention on Long-range Transboundary Air Pollution) guidance.

Table 2-1. Air Quality Standards, Objectives, Limits and Target Values

Pollutant	Applies	Objective	Concentration Measured as ¹⁰	Date to be achieved and maintained thereafter	European Obligations	Date to be achieved and maintained thereafter	New or existing
PM ₁₀	UK	50µg/m ³ by end of 2004 (max 35 exceedances a year)	24-hour Mean	1 st January 2005	50µg/m ³ by end of 2004 (max 35 exceedances a year)	1 st January 2005	Retain Existing
	UK	40µg/m ³ by end of 2004	Annual Mean	1 st January 2005	40µg/m ³	1 st January 2005	
PM _{2.5}	UK	25µg/m ³	Annual Mean	31 st December 2010	25µg/m ³	1 st January 2010	Retain Existing
NO ₂	UK	200µg/m ³ not to be exceeded more than 18 times a year	1-Hour Mean	31 st December 2005	200µg/m ³ not to be exceeded more than 18 times a year	1 st January 2010	Retain Existing
	UK	40µg/m ³	Annual Mean	31 st December 2005	40µg/m ³	1 st January 2010	

Table 2-2. Ecological Air Quality Standards, Objectives, Limit and Target Values

Pollutant	Applies	Objective	Concentration Measured as
NO _x	UK	30µg/m ³	Annual Mean

Within the context of this assessment, the annual mean objectives are those against which facades of residential receptors will be assessed and the short-term objectives apply to all other receptor locations, where people may be exposed over a short duration, both residential and non-residential such as using gardens, balconies, walking along streets, using playgrounds, footpaths or external areas of employment uses.

Local Air Quality Management

Under Section 82 of the Environment Act (1995) (Part IV) Local Authorities (LAs) are required to periodically review and assess air quality within their area of jurisdiction under the system of Local Air Quality Management (LAQM). This review and assessment of air quality involves assessing present and likely future air quality against the AQOs. If it is predicted that levels at the façade of buildings where members of the public are regularly present (normally residential properties) are likely to be exceeded, the LA is required to declare an Air Quality Management Area (AQMA).

2.3 PLANNING AND POLICY GUIDANCE

National Policy

The National Planning Policy Framework (NPPF), revised February 2019, principally brings together and summarises the suite of Planning Policy Statements (PPS) and Planning Policy Guidance (PPG) which previously guided planning policy making. The NPPF (para. 181) states that:

'Planning policies and decisions should sustain and contribute towards compliance with relevant limit values or national objectives for pollutants, taking into account the presence of Air Quality Management Areas or Clean Air Zones, and the cumulative impacts from individual sites in local areas. Opportunities to improve air quality or mitigate impacts should be identified, such as through traffic or travel management, and green infrastructure provision and enhancement. So far as possible these opportunities should be considered at the plan-making stage, to ensure a strategic approach and limit the need for issues to be reconsidered when determining individual applications. Planning decisions should ensure that any new development in Air Quality Management Areas and Clean Air Zones is consistent with the local air quality action plan'.

The Planning Practice Guidance (PPG) web-based resource was updated by the Ministry for Housing, Communities and Local Government (MHCLG) on 1st November 2019 to support the National Planning Policy Framework and make it more accessible. A review of PPG: Air Quality identified the following guidance (Paragraph: 001 Reference ID: 32-001-20191101):

"The 2008 Ambient Air Quality Directive sets legally binding limits for concentrations in outdoor air of major air pollutants that affect public health such as particulate matter (PM₁₀ and PM_{2.5}) and nitrogen dioxide (NO₂).

The UK also has national emission reduction commitments for overall UK emissions of 5 damaging air pollutants:

- *fine particulate matter (PM_{2.5});*
- *ammonia (NH₃);*
- *nitrogen oxides (NO_x);*
- *sulphur dioxide (SO₂); and*
- *non-methane volatile organic compounds (NMVOCs).*

As well as having direct effects on public health, habitats and biodiversity, these pollutants can combine in the atmosphere to form ozone, a harmful air pollutant (and potent greenhouse gas) which can be transported great distances by weather systems. Odour and dust can also be a planning concern, for example, because of the effect on local amenity."

Regional Policy

The London Borough of Hillingdon (LBoH) lies within the Greater London Authority (GLA) Area. The new London Plan addresses the improvement of air quality. Following a review of policies within the new Local Plan, the following were identified as being relevant to the proposed development from an air quality perspective:

"Policy SD4 The Central Activities Zone (CAZ)

D. Taking account of the dense nature of the CAZ, practical measures should be taken to improve air quality, using an air quality positive approach where possible (Policy SI 1 Improving air quality) and to address issues related to climate change and the urban heat island effect."

"Policy D1 London's form, character and capacity for growth

*A. Boroughs should undertake area assessments to define the characteristics, qualities and value of different places within the plan area to develop an understanding of different areas' capacity for growth. Area assessments should cover the elements listed below:
5)air quality and noise levels."*

"Policy D3 Optimising site capacity through the design-led approach

Experience

9) help prevent or mitigate the impacts of noise and poor air quality."

"Policy E5 Strategic Industrial Locations (SIL)

D. Development proposals within or adjacent to SILs should not compromise the integrity or effectiveness of these locations in accommodating industrial type activities and their ability to operate on a 24-hour basis. Residential development adjacent to SILs should be designed to ensure that existing or potential industrial activities in SIL are not compromised or curtailed. Particular attention should be given to layouts, access, orientation, servicing, public realm, air quality, soundproofing and other design mitigation in the residential development."

"Policy E7 Industrial intensification, co-location and substitution

D. The processes set out in Parts B and C above must ensure that: f) air quality, including dust, odour and emissions and potential contamination."

"Policy SI1 Improving Air Quality

A. Development plans, through relevant strategic, site specific and area-based policies should seek opportunities to identify and deliver further improvements to air quality and should not reduce air quality benefits that result from the Mayor's or boroughs' activities to improve air

quality.

B. To tackle poor air quality, protect health and meet legal obligations the following criteria should be addressed:

1. Development proposals should not:

- a) lead to further deterioration of existing poor air quality*
- b) create any new areas that exceed air quality limits, or delay the date at which compliance will be achieved in areas that are currently in exceedance of legal limits*
- c) create unacceptable risk of high levels of exposure to poor air quality.*

2. In order to meet the requirements in Part 1, as a minimum:

- a) Development proposals must be at least air quality neutral*
- b) Development proposals should use design solutions to prevent or minimise increased exposure to existing air pollution and make provision to address local problems of air quality in preference to post-design or retrofitted mitigation measures*
- c) Major development proposals must be submitted with an Air Quality Assessment. Air quality assessments should show how the development will meet the requirements of B1*
- d) Development proposals in Air Quality Focus Areas or that are likely to be used by large numbers of people particularly vulnerable to poor air quality, such as children or older people, should demonstrate that design measures have been used to minimise exposure.*

C. Masterplans and development briefs for large-scale development proposals subject to an Environmental Impact Assessment should consider how local air quality can be improved across the area of the proposal as part of an Air Quality Positive approach. To achieve this a statement should be submitted demonstrating:

- a) How proposals have considered ways to maximise benefits to local air quality, and*
- b) What measures or design features will be put in place to reduce exposure to pollution, and how they will achieve this*

D. In order to reduce the impact on air quality during the construction and demolition phase Development proposals must demonstrate how they plan to comply with the Non-Road Mobile Machinery Low Emission Zone and reduce emissions from the demolition and construction of buildings following best practice guidance.

E. Development proposals should ensure that where emissions need to be reduced to meet the requirements of Air Quality Neutral or to make the impact of development on local air quality acceptable, this is done on-site. Where it can be demonstrated that emissions cannot be further reduced by on-site measures, off-site measures to improve local air quality may be acceptable, provided that equivalent air quality benefits can be demonstrated within the area affected by the development.”

“Policy SI8 Waste capacity and net waste self-sufficiency

E. Developments proposals for new waste sites or to increase the capacity of existing sites should be evaluated against the following criteria: 4) the impact on amenity in surrounding areas (including but not limited to noise, odours, air quality and visual impact) – where a site is likely to produce significant air quality, dust or noise impacts, it should be fully enclosed.”

“Policy T6.2 Office Parking

D. Outer London boroughs wishing to adopt more generous standards are required to do so through an evidence-based policy in their Development Plan that identifies the parts of the borough in which the higher standards will be applied, and justifies those standards, including: 3) the impact on congestion and air quality locally and on neighboring boroughs and districts outside London as appropriate.”

“Policy T8 Aviation

- B. The environmental and health impacts of aviation must be fully acknowledged, and aviation-related development proposals should include mitigation measures that fully meet their external and environmental costs, particularly in respect of noise, air quality and climate change. Any airport expansion scheme must be appropriately assessed and if required demonstrate that there is an overriding public interest or no suitable alternative solution with fewer environmental impacts.*
- C. The Mayor will oppose the expansion of Heathrow Airport unless it can be shown that no additional noise or air quality harm would result, and that the benefits of future regulatory and technology improvements would be fairly shared with affected communities.”*

Local Policy

Following a review of the London Borough of Hillingdon Local Plan, A Vision for 2026 (adopted November 2012), the following policy concerning air quality was identified.

“Policy E2: Location of Employment Growth

The Council will accommodate 9,000 new jobs during the plan period. Most of this employment growth will be directed towards suitable sites in the Heathrow Opportunity Area, Strategic Industrial Locations (SILs), Locally Significant Employment Locations (LSEL), Locally Significant Industrial Sites (LSIS), Uxbridge Town Centre and Hayes Town Centre with a particular focus around transport nodes. The Council will promote development in highly accessible locations that delivers sustainable travel patterns and contributes to the improvement of existing networks to reduce emissions and impacts on air quality. The Council will accommodate a minimum of 3,800 additional hotel bedrooms, and new hotels and visitor facilities will be encouraged in Uxbridge, Hayes, on sites outside of designated employment land on the Heathrow perimeter and in other sustainable locations.”

“Policy EM1: Climate Change Adaptation and Mitigation

The Council will ensure that climate change mitigation is addressed at every stage of the

development process by:

1. *Prioritising higher density development in urban and town centres that are well served by sustainable forms of transport.*
2. *Promoting a modal shift away from private car use and requiring new development to include innovative initiatives to reduce car dependency.*
3. *Ensuring development meets the highest possible design standards whilst still retaining competitiveness within the market.*
4. *Working with developers of major schemes to identify the opportunities to help provide efficiency initiatives that can benefit the existing building stock.*
5. *Promoting the use of decentralised energy within large scale development whilst improving local air quality levels.*
6. *Targeting areas with high carbon emissions for additional reductions through low carbon strategies. These strategies will also have an objective to minimise other pollutants that impact on local air quality. Targeting areas of poor air quality for additional emissions reductions.*
7. *Encouraging sustainable techniques to land remediation to reduce the need to transport waste to landfill. In particular developers should consider bioremediation as part of their proposals.*
8. *Encouraging the installation of renewable energy for all new development in meeting the carbon reduction targets savings set out in the London Plan. Identify opportunities for new sources of electricity generation including anaerobic digestion, hydroelectricity and a greater use of waste as a resource.*
9. *Promoting new development to contribute to the upgrading of existing housing stock where appropriate.*

The Borough will ensure that climate change adaptation is addressed at every stage of the development process by:

10. *Locating and designing development to minimise the probability and impacts of flooding.*
11. *Requiring major development proposals to consider the whole water cycle impact which includes flood risk management, foul and surface water drainage and water consumption.*
12. *Giving preference to development of previously developed land to avoid the loss of further green areas.”*

“Policy EM8: Land, Water, Air and Noise

Air Quality

All development should not cause deterioration in the local air quality levels and should ensure the protection of both existing and new sensitive receptors.

All major development within the Air Quality Management Area (AQMA) should demonstrate air

quality neutrality (no worsening of impacts) where appropriate; actively contribute to the promotion of sustainable transport measures such as vehicle charging points and the increased provision for vehicles with cleaner transport fuels; deliver increased planting through soft landscaping and living walls and roofs; and provide a management plan for ensuring air quality impacts can be kept to a minimum.

The Council seeks to reduce the levels of pollutants referred to in the Government's National Air Quality Strategy and will have regard to the Mayor's Air Quality Strategy. London Boroughs should also take account of the findings of the Air Quality Review and Assessments and Actions plans, in particular where Air Quality Management Areas have been designated.

The Council has a network of Air Quality Monitoring stations but recognises that this can be widened to improve understanding of air quality impacts. The Council may therefore require new major development in an AQMA to fund additional air quality monitoring stations to assist in managing air quality improvements."

3.0 ASSESSMENT METHODOLOGY

The potential environmental effects of the operational phase of the proposed development have been identified as proposed vehicle movements. The significance of potential environmental effects is assessed according to the latest guidance produced by EPUK and IAQM in January 2017 '*Land-Use Planning & Development Control: Planning for Air Quality*' and May 2020 '*A Guide to the Assessment of Air Quality Impacts on Designated Nature Conservation Sites*'.

The methodology used to determine the potential air quality effects of the construction phase of the proposed development has been derived from the IAQM '*Guidance on the Assessment of the Impacts of Dust from Demolition and Construction*' document and is summarised in Section 5.

3.1 DETERMINING IMPACT DESCRIPTION OF THE AIR QUALITY EFFECTS

The impact description of the effects during the operational phase of the development is based on the latest guidance produced by EPUK and IAQM in January 2017. The guidance provides a basis for a consistent approach that could be used by all parties associated with the planning process to professionally judge the overall impact description of the air quality effects based on severity of air quality impacts.

The following rationale is used in determining the severity of the air quality effects at individual receptors:

1. The change in concentration of air pollutants, air quality effects, are quantified and evaluated in the context of AQOs. The effects are provided as a percentage of the Air Quality Objective (AQO), which may be an AQO, EU limit or target value, or an Environment Agency 'Environmental Assessment Level (EAL)';
2. The absolute concentrations are also considered in terms of the AQO and are divided into categories for long term concentration. The categories are based on the sensitivity of the individual receptor in terms of harm potential. The degree of harm potential to change increases as absolute concentrations are close to or above the AQO;
3. Severity of the effect is described as qualitative descriptors; negligible, slight, moderate or substantial, by taking into account in combination the harm potential and air quality effect. This means that a small increase at a receptor which is already close to or above the AQO will have higher severity compared to a relatively large change at a receptor which is significantly below the AQO;
4. The effects can be adverse when pollutant concentrations increase or beneficial when concentrations decrease as a result of development;
5. The judgement of overall impact description of the effects is then based on severity of effects on all the individual receptors considered; and,
6. Where a development is not resulting in any change in emissions itself, the impact description of effect is based on the effect of surrounding sources on new residents or users of the development, i.e., will they be exposed to levels above the AQO.

Table 3-1. Impact Descriptors for Individual Receptors

Long term average concentration at receptor in assessment year	% Change in concentration relative to AQO			
	1	2-5	6-10	>10
≤75% of AQO	Negligible	Negligible	Slight	Moderate
76-94% of AQO	Negligible	Slight	Moderate	Moderate
95-102% of AQO	Slight	Moderate	Moderate	Substantial
103-109 of AQO	Moderate	Moderate	Substantial	Substantial
≥110 of AQO	Moderate	Substantial	Substantial	Substantial

In accordance with explanation note 2 of Table 6.3 of the EPUK & IAQM guidance, the Table is intended to be used by rounding the change in percentage pollutant concentration to whole numbers, which then makes it clearer which cell the impact falls within. The user is encouraged to treat the numbers with recognition of their likely accuracy and not assume a false level of precision. Changes of 0%, i.e. less than 0.5%, will be described as Negligible.

4.0 BASELINE CONDITIONS

4.1 AIR QUALITY REVIEW

This section provides a review of the existing air quality in the vicinity of the application site in order to provide a benchmark against which to assess potential air quality impacts of the proposed development. Baseline air quality in the vicinity of the application site has been defined from several sources, as described in the following sections.

Local Air Quality Management (LAQM)

As required under section 82 of the Environment Act 1995, London Borough of Hillingdon (LBoH) has undertaken an ongoing exercise to review and assess air quality within its area of jurisdiction. The assessments have indicated that concentrations of NO₂ are above the relevant AQOs at locations of relevant public exposure within the Borough. Therefore, LBoH has designated a boroughwide Air Quality Management Area (AQMA).

The assessments have indicated that concentrations of NO₂ are above the relevant AQOs at one location of relevant public exposure within LBoH that is shown below.

Table 4-1. Local Authority AQMA Details

AQMA	Description	Date Declared	Date Amended	Pollutants Declared
Hillingdon AQMA	The area from the southern boundary north to the border defined by, the A40 corridor from the western borough boundary, east to the intersection with the Yeading Brook north until its intersection with the Chiltern-Marylebone railway line.	01/09/2003	N/A	Nitrogen Dioxide NO ₂

The proposed development site is situated within the Hillingdon AQMA, therefore existing receptors within the AQMA have been included as part of the modelling assessment.

Air Quality Monitoring

Monitoring of air quality within LBoH has been undertaken through both automatic and non-automatic monitoring methods in 2019. These have been reviewed in order to provide an indication of existing air quality in the area surrounding the application site. The most recent monitoring data within LBoH was undertaken during 2019.

Continuous Monitoring

London Borough of Hillingdon undertook automatic pollution monitoring during 2019 at 11 different locations. The closest monitoring location is HI1, approximately 4.9 km east of the application site. The most recently available data is from 2019 which is presented in

Table 4-2.

Table 4-2. Monitored Annual Mean NO₂ Concentrations at Automatic Monitoring Locations

Site ID	Location	Site Type	Distance from Kerb of Nearest Road (m)	Inlet Height (m)	2019 NO ₂ Annual Mean Concentration (µg/m ³)	2019 PM ₁₀ Annual Mean Concentration (µg/m ³)	2019 PM _{2.5} Annual Mean Concentration (µg/m ³)
LHR2	London Heathrow	Airport	N/A (Inside Airport)	1.5	42.0	13.0	9.0
HIL	London Hillingdon	Urban background	2.5	1.5	45.0	-	-
HI1	Hillingdon 1 - South Ruislip	Roadside	2.5	1.5	34.0	17.0	
HI3	Hillingdon 3 - Oxford Avenue	Roadside	33.0m to A4 Bath Road 2.0m to Oxford Avenue	1.5	33.0	24.0	-
HRL	London Harlington	Airport	3.0	1.5	31.0	15.0	10.0
SIPS	Hillingdon Sipson	Urban background	2.5	1.5	30.0	-	-
HIL1	London Harmondsworth	Roadside	1.0	1.5	28.0	15.0	
HIL4	London Harmondsworth Osiris	Urban background	13.0	1.5	-	14.0	5.0
T55	Heathrow Green Gates	Airport	N/A (Background for the Airport) (62m to Airport Boundary)	1.5	31.0	13.0	8.0
T54	Heathrow Oaks	Airport	5.0	1.5	26.0	15.0	10.0
HIL5	Hillingdon Hayes	Roadside	1.0	1.5	41.0	28.0	-

As outlined in

Table 4-2, three monitoring locations, LHR2, HIL, and HIL5, monitored annual average NO₂ concentrations above the AQO for NO₂ (40 µg/m³ annual mean) in 2019, whilst all other automatic monitoring stations monitored annual average NO₂ concentrations below the AQO for NO₂ in 2019..

Non - Continuous Monitoring

LBoH operates a network of 54 passive diffusion tubes. The closest diffusion tube is diffusion tube HILL24, which is located on Hillingdon Road, approximately 322 m south east of the application site. The most recently available diffusion tube data is from 2019 which is presented in **Table 4-3**.


Table 4-3. Monitored Annual Mean NO₂ Concentrations at Diffusion Tubes

Site ID	Location	Site Type	Distance from Kerb (m)	Inlet Height (m)	Monitored 2019 Annual Mean NO ₂ Concentration (µg/m ³)
HILL02	Uxbridge Day Nursery Park Road Uxbridge (on wire Fence)	Roadside	4	1.5	36.9
HILL23	198 Harefield Road, Uxbridge Lamp Post (2)	Background	33	1.5	29.3
HILL24	59 Hillingdon Road, Uxbridge Lamp Post (56)	Roadside	1.5	1.5	34.7
HD52	Lamp post near 101 Cowley Mill Road Uxbridge	Roadside	1	1.5	26.5

As indicated in **Table 4-3**, all diffusion tubes located within the Air Quality Assessment area monitored annual average NO₂ concentrations below the AQO for NO₂ (40 µg/m³ annual mean) during 2019.

It should be noted that as part of the model verification a review of diffusion tubes locations and monitoring heights was undertaken. As part of this process, the locations and monitoring heights were adjusted following desk-based review using Google Maps.

Figure 4-1. Local Authority Monitoring Locations

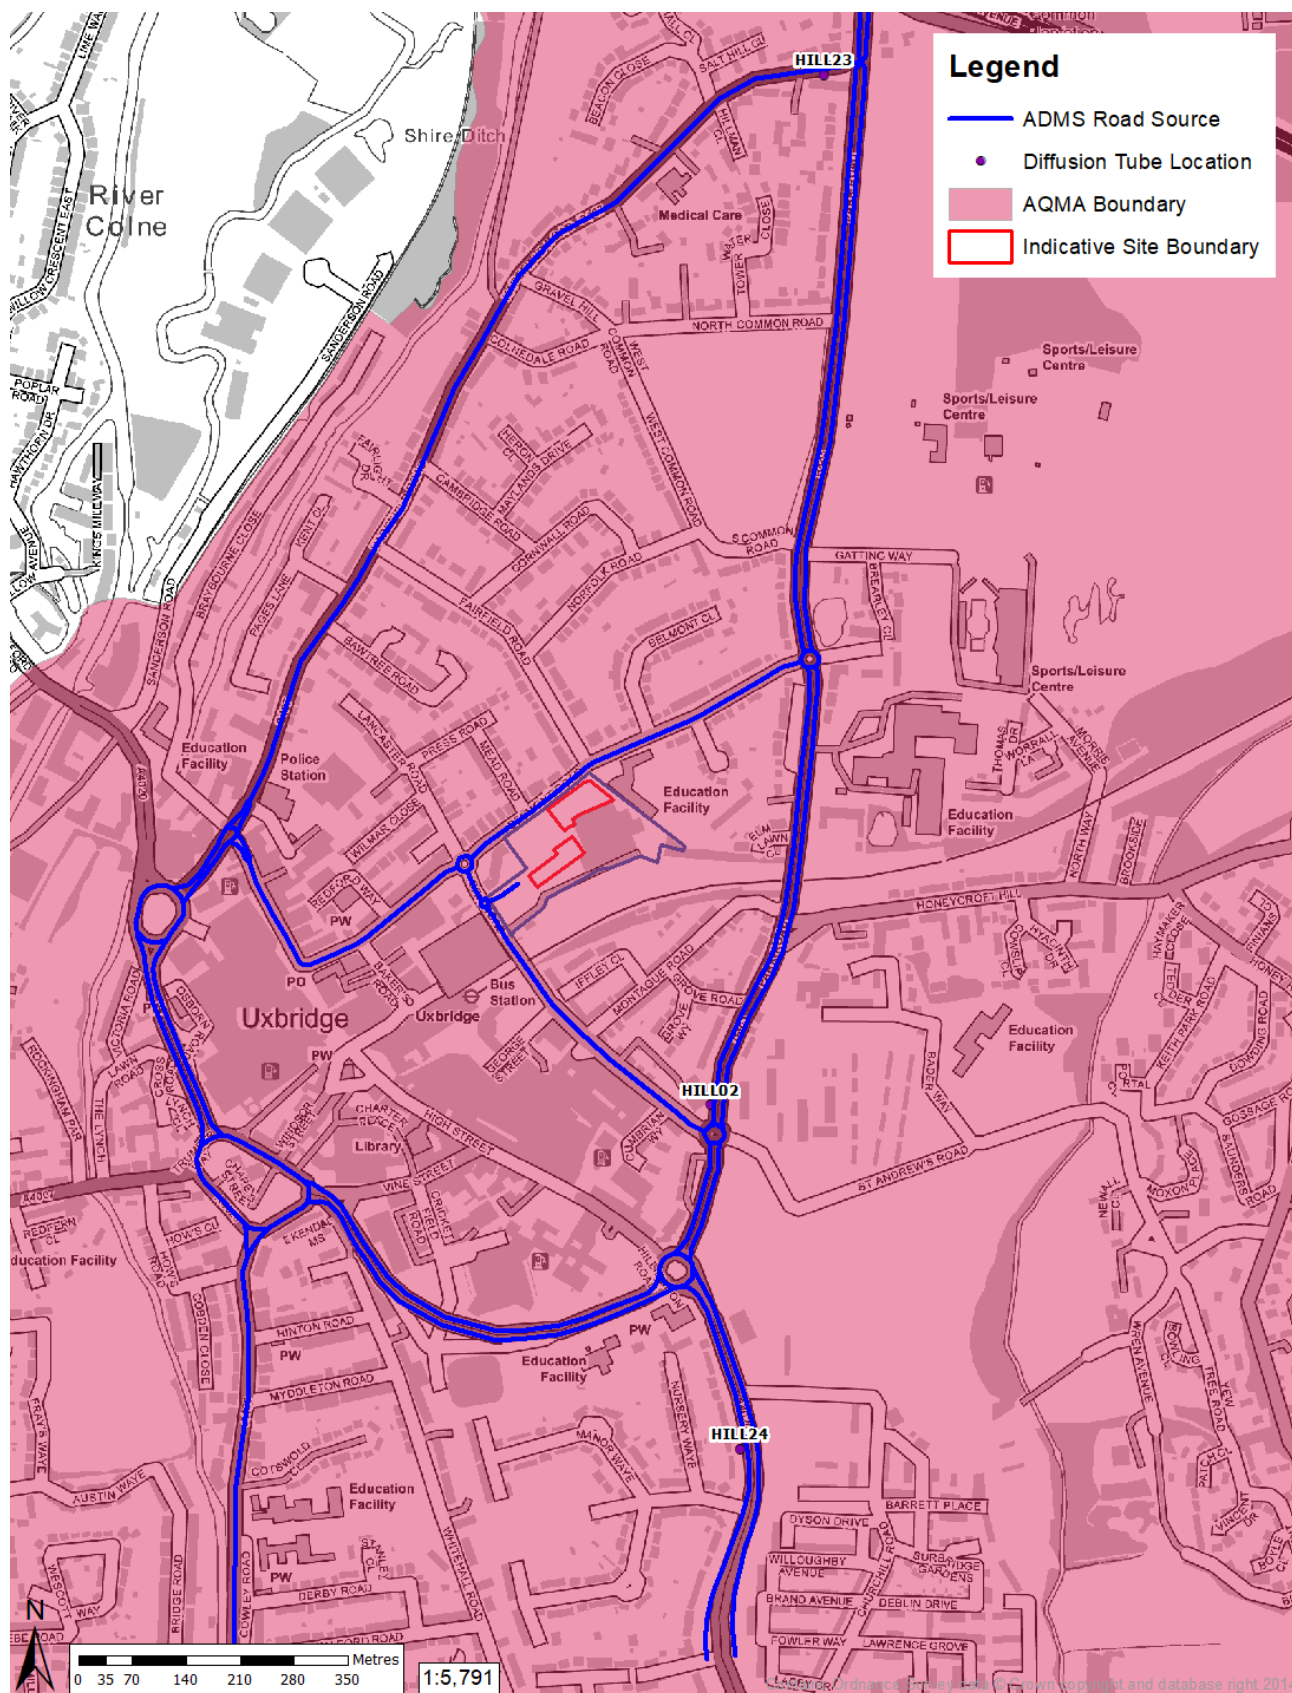


4.2 METEOROLOGY

Meteorological conditions have significant influence over air pollutant concentrations and dispersion. Pollutant levels can vary significantly from hour to hour as well as day to day, thus any air quality predictions need to be based on detailed meteorological data. The ADMS (Atmospheric Dispersion Modelling System) model calculates the dispersion of pollutants on an hourly basis using a year of local meteorological data.

The 2019 meteorological data used in the assessment is derived from Heathrow Airport Meteorological Station. This is the nearest meteorological station, which is considered representative of the application site, with all the complete parameters necessary for the ADMS model. Reference should be made to **Figure 4-2** for an illustration of the prevalent wind conditions at Heathrow Airport Meteorological Station site.

Figure 4-2. Heathrow Airport 2019 Wind Rose

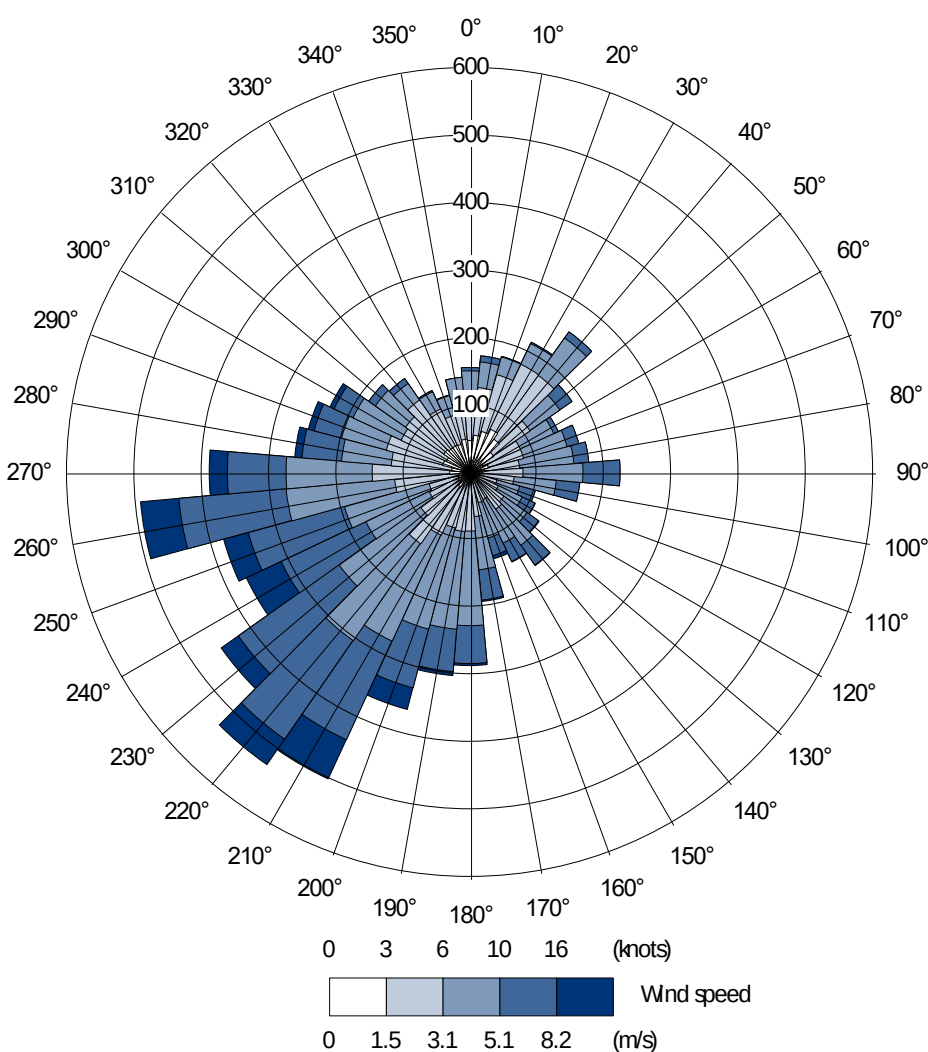

4.3 EMISSION SOURCES

A desktop assessment has identified that traffic movements are likely to be the most significant local source of pollutants affecting the site and its surroundings. The principal traffic derived pollutants likely to impact local receptors are NO₂, PM₁₀ and PM_{2.5}.

The assessment has therefore modelled all roads within the immediate vicinity of the application site which are considered likely to experience significant changes in traffic flow as a result of the proposed development. Reference should be made to **Figure A-1** for a graphical representation of the traffic data utilised within the ADMS Roads 5.0 model.

It should be noted that the pollutant contribution of minor roads and rail sources that are not included within the dispersion model is considered to be accounted for via the use of background air quality levels.

4.4 SENSITIVE RECEPTORS

Receptors that are considered as part of the air quality assessment are primarily those existing receptors that are situated along routes predicted to experience significant changes in traffic flow as a result of the proposed development.

The existing receptor locations are summarised in

Table 4-4 and the spatial locations of all of the receptors are illustrated in **Figure 4-3**.

Table 4-4. Modelled Sensitive Receptor Locations

Existing Sensitive Receptor		X	Y	Receptor Height (m)
R1	67 Belmont Road	505675	184392	1.5
R2	Hermitage Primary School	505879	184504	1.5
R3	201 Park Road	506102	184651	1.5
R4	Uxbridge College	506182	184509	1.5
R5	114 Park Road	506143	184554	1.5
R6	249 Park Road	506176	185385	1.5
R7	247 Harefield Road	506165	185424	1.5
R8	Laburnum Court 9 Harefield Road	505386	184457	1.5
R9	The Cedars 66 High Street	505374	184389	1.5
R10	Cave House Osborn Road	505293	184253	4.0
R11	10 Frays Court Victoria Road	505247	184241	1.5
R12	3 Lynch Close	505321	184020	1.5
R13	5 Cochrane House Cowley Road	505491	183921	1.5
R14	27 Cochrane House Crowley Road	505425	183884	1.5
R15	51 Cobden Close	505374	183812	1.5
R16	Whitehall Nursery & Infants Sc	505401	183549	1.5
R17	St Andrews CofE Primary School	505857	183753	1.5
R18	75 Hillingdon Road	505992	183752	1.5
R19	11 Park Court Park Road	505960	183933	1.5
R20	Uxbridge Day Nursery Park Road	505992	184061	1.5
R21	119 Park Road	506078	184300	1.5

The locations of the receptor are identified on **Figure 4-3**.

4.5 ECOLOGICAL RECEPTORS


Air quality impacts associated with the proposed re-development have the potential to impact on receptors of ecological sensitivity within the vicinity of the site. The IAQM guidance on 'Air Quality Impacts on Designated Nature Conservation Sites' (2020) outlines the types of designated nature sites within 2 km of the proposed development which require air quality assessment. These are inclusive of;

- Sites of Special Scientific Interest (SSSIs);
- Special Areas of Conservation (SACs);
- Special Protection Areas (SPAs);
- Ramsar Sites;
- Areas of Special Scientific Interest (ASSIs);
- National Nature Reserves (NNRs);
- Local Nature Reserves (LNRs);
- Local Wildlife Sites (LWSs); and,
- Areas of Ancient Woodland (AW).

The Conservation of Habitats and Species Regulations (2019) additionally requires competent authorities to review planning applications and consents that have the potential to impact on European designated sites (e.g. Special Protection Areas).

A study was undertaken to identify any statutory designated sites of ecological or nature conservation importance within the extents of the dispersion modelling assessment. This was completed using the Multi-Agency Geographic Information for the Countryside (MAGIC) web-based interactive mapping service, which draws together information on key environmental schemes and designations. Following a search within a 2 km radius of the site boundary, no ecological receptors were identified.

Figure 4-3. Sensitive Receptor Locations

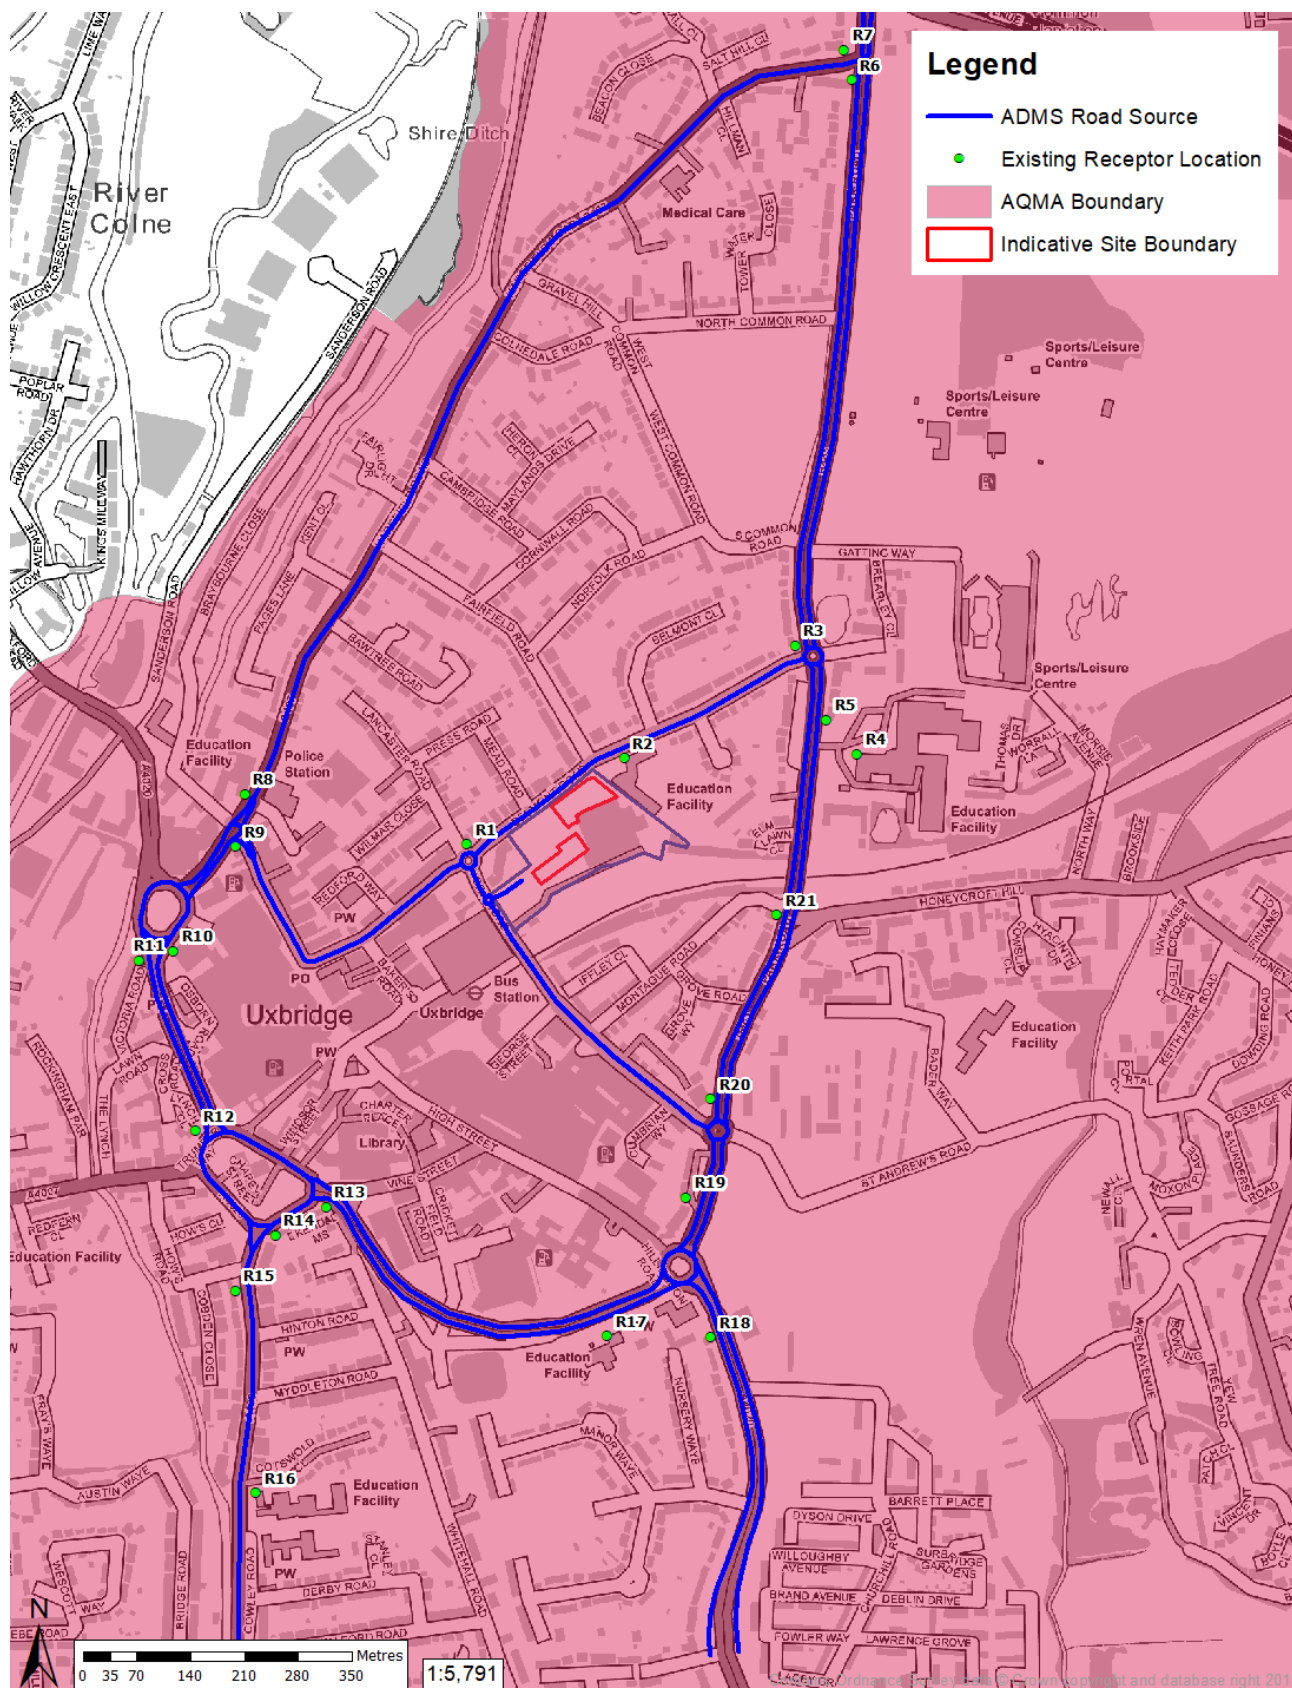

5.0 ASSESSMENT OF AIR QUALITY IMPACTS - CONSTRUCTION PHASE

5.1 POLLUTANT SOURCES

The main emissions during construction are likely to be dust and particulate matter generated during earth moving (particularly during dry months) or from construction materials. The main potential effects of dust and particulate matter are:

- Visual - dust plume, reduced visibility, coating and soiling of surfaces leading to annoyance, loss of amenity, the need to clean surfaces;
- Physical and/or chemical contamination and corrosion of artefacts;
- Coating of vegetation and soil contamination; and,
- Health effects due to inhalation e.g. asthma or irritation of the eyes.

A number of other factors such as the amount of precipitation and other meteorological conditions will also greatly influence the amount of particulate matter generated.

Construction activities can give rise to short-term elevated dust/PM₁₀ concentrations in neighbouring areas. This may arise from vehicle movements, soiling of the public highway, demolition or windblown stockpiles.

5.2 PARTICULATE MATTER (PM₁₀)

The UK Air Quality Standards seek to control the health implications of respirable PM₁₀. However, the majority of particles released from construction will be greater than this in size.

Construction works on site have the potential to elevate localised PM₁₀ concentrations in the area. On this basis, mitigation measures should still be taken to minimise these emissions as part of good site practice.

5.3 DUST

Particles greater than 10µm are likely to settle out relatively quickly and may cause annoyance due to their soiling capability. Although there are no formal standards or criteria for nuisance caused by deposited particles, the IAQM 'Guidance on Monitoring in the Vicinity of Demolition and Construction Sites' (October 2018) and the Environment Agency Technical Guidance Note (TGN) M17 states that dust is usually compared with a 'complaints likely' guideline of 200mg/m²/day. Therefore, a deposition rate of 200mg/m²/day is often presented as a threshold for serious nuisance though this is usually only applied to long term exposure as people are generally more tolerant of dust for a short or defined period. Significant nuisance is likely when the dust coverage of surfaces is visible in contrast with adjacent clean areas, especially when it happens regularly. Severe dust nuisance occurs when the dust is perceptible without a clean reference surface.

Construction activities have the potential to suspend dust, which could result in annoyance of residents surrounding the site. Measures will be taken to minimise the emissions of dust as part of good site practice.

Recommended mitigation measures proportionate to the risk associated with the development and based on best practice guidance are discussed in the following sections.

5.4 METHODOLOGY

The construction phase assessment utilises the IAQM Guidance on the Assessment of Dust from Demolition and Construction document published in February 2014.

Four construction processes are considered; these are demolition, earthworks, construction and trackout. For each of these phases, the impact description of the potential dust impacts is derived following the determination of a dust emission magnitude and the distance of activities to the nearest sensitive receptor, therefore assessing worst case impacts. A full explanation of the methodology is contained in Appendix A.

5.5 ASSESSMENT RESULTS

Based on the methodology detailed in Appendix A, the scale of the anticipated works has determined the potential dust emission magnitude for each process, as presented in the **Table 5-1** below.

Table 5-1. Dust Emission Magnitude

Construction Process	Site Criteria	Dust Emission Magnitude
Demolition	No demolition required	N/A
Earthworks	Total Site Area: 2,500-10,000 m ²	Medium
Construction	Total Building Volume <25,000 m ³	Small
Trackout	Assumed <10 HDV outward movements in any one day	Small

The sensitivity of the surrounding area to each construction process has been determined following stage 2B of the IAQM guidance. The assessment has determined the area sensitivities as shown in the **Table 5-2**.

The sensitivity of the ecological receptors is considered not applicable within the construction phase assessment due to the distance from the application site which is greater than 500m. This is in accordance with Table 4 of the IAQM Guidance.

Table 5-2. Sensitivity of the Area

Source	Area Sensitivity					
	Dust Soiling	Site Sensitivity Criteria	Health Effects of PM ₁₀	Site Sensitivity Criteria	Ecological	Site Sensitivity Criteria
Demolition	N/A	No demolition required	N/A	No demolition required	N/A	No demolition required
Earthworks	Medium	10-100 Highly Sensitive Receptors within 50m	Low	Annual Mean of <24 ug/m ³ for PM ₁₀ 10-100 Highly Sensitive Receptors within 50m	N/A	>50 m from site boundary
Construction	Medium		Low	10-100 Highly Sensitive Receptors within 50m	N/A	
Trackout	High	10-100 Highly Sensitive Receptors within 20m of roads within 500m of site	Low	Annual Mean of <24 ug/m ³ for PM ₁₀ 10-100 Highly Sensitive Receptors within 50m of roads within 500m of site	N/A	>50 m from roads within 500 m from site boundary

The dust emission magnitude determined in **Table 5-1** has been combined with the sensitivity of the area determined in **Table 5-2**, to determine the risk of impacts prior to the implementation of appropriate mitigation measures. The potential impact significance of dust emissions associated with the development, without mitigation, is presented in **Table 5-3**.

Table 5-3. Impact Description of Construction Activities without Mitigation

Source	Summary Risk of Impacts Prior to Mitigation		
	Dust Soiling	Health Effects of PM ₁₀	Ecological
Demolition	N/A	N/A	N/A
Earthworks	Medium	Low	N/A
Construction	Low	Negligible	N/A
Trackout	Low	Negligible	N/A

Appropriate mitigation measures are detailed and presented in Section 7. Following the adoption of these measures, the subsequent impact significance of the construction phase is not predicted to be significant.

6.0 ASSESSMENT OF AIR QUALITY IMPACTS - OPERATIONAL PHASE

In the context of the proposed development, road traffic is identified as the dominant emission source that is likely to cause potential risk of exposure of air pollutants at receptors.

The operational phase assessment therefore consists of the quantified predictions of the change in NO₂, PM₁₀ and PM_{2.5} for the operational phase of the development due to changes in traffic movement. Predictions of air quality at the site have been undertaken for the operational phase of the development using ADMS Roads.

In accordance with the provided traffic data, the operational phase assessment has been undertaken with an assumed operational opening year of 2022. The assessment scenarios are therefore:

- 2019 Baseline = Existing Baseline Conditions (2019);
- 2022 “Do Minimum” = Baseline Conditions + Committed Development Flows (through local growth factor); and,
- 2022 “Do Something” = Baseline Conditions + Committed Development (through local growth factor) + Proposed Development.

6.1 EXISTING AND PREDICTED TRAFFIC FLOWS

Baseline 2019 traffic data, projected 2022 ‘Do Minimum’ and ‘Do Something’ traffic data, and average vehicle speeds have been obtained for the operational phase assessment in the form of Annual Average Daily Traffic figures (AADT). Development traffic flows have been provided by Mayer Brown Limited.

Baseline 2019 traffic data was downloaded from the Department for Transport (DfT) website.

The proposed development opening year is assumed to be a worst-case year of 2022. To determine the traffic flows for the 2022 ‘Do Minimum’ traffic flows, a TEMPro factor of 1.0286 has been applied to the 2019 Baseline traffic data.

Predicted development flows have been combined with 2022 ‘Do Minimum’ traffic flows to determine the ‘Do Something’ 2022 scenario traffic flows. Development traffic flows were provided by Mayer Brown Limited.

Emission factors for the 2019 baseline and 2022 projected ‘Do Minimum’ and ‘Do Something’ scenarios have been calculated using the Emission Factor Toolkit (EFT) Version 10.1 (August 2020).

It is assumed the average vehicle speeds on the local road network in an opening year of 2022 will be broadly the same as the ones in 2019. A 50 m 20 km/hr slow down phase is included on each link at every junction and roundabout within the assessment. All of the roads within the dispersion model are illustrated in **Figure A-1**. Detailed traffic figures are provided in the

Table 6-1.

Table 6-1. Traffic Data

Link	Speed (km/h)	2019 Baseline		2022 Do Minimum		2022 Do Something	
		AADT	HGV %	AADT	%HGV	AADT	%HGV
Site Access	20	0	0.0	0	0.0		
York Road (North of Site access)	48	3,841	3.8	3,951	3.8		
York Road (South of Site access)	48	3,841	3.8	3,951	3.8		
Belmont Road (East of York Road)	48	4,127	0.6	4,245	0.6		
Belmont Road (West of York Road)	48	4,127	0.6	4,245	0.6		
B467 Harefield Road (West of High Street)	48	16,763	1.3	17,243	1.3		
B467 Harefield Road (East of High Street)	48	7,913	1.0	8,139	1.0		
B483 Park Road (North of Belmont Road)	64	27,610	2.3	28,400	2.3		
B483 Park Road (North of Harefield Road)	48	27,610	2.3	28,400	2.3		
B483 Park Road (South of Belmont Road)	48/64	27,610	2.3	28,400	2.3		
B483 Park Road (South of York Road)	48	27,610	2.3	28,400	2.3		
A4020 Hillingdon Road (South of Park Road)	64	37,057	1.4	38,117	1.4		
A4020 Hillingdon Road (East of Cowley Road)	64	27,610	2.3	28,400	2.3		
Oxford Road	48	27,387	2.3	28,170	2.3		
Cowley Road	48	14,165	4.3	14,570	4.3		

6.2 BACKGROUND CONCENTRATIONS

The use of background concentrations within the modelling process ensures that pollutant sources other than traffic are represented appropriately. Background sources of pollutants include industrial, domestic and rail emissions within the vicinity of the study site. Several sources have been used to obtain representative background levels as discussed below.

The background concentrations used within the assessment have been determined with reference to the IAQM Guidance and Technical Guidance (TG) (16).

The IAQM Guidance states:

“A matter of judgement should take into account the background and future background air quality and whether it is likely to approach or exceed the value of the AQO.”

Additionally, TG (16) states:

“Typically, only the process contributions from local sources are represented within an output by the dispersion model. In these circumstances, it is necessary to add an appropriate background concentration(s) to the modelled source contributions to derive the total pollutant concentrations.”

Defra Published Background Concentrations for 2019

The background concentrations shown in **Table 6-2** were referenced from the UK National Air Quality Information Archive database based on the National Grid Co-ordinates of 1 x 1 km grid squares nearest to the application site. In May 2019, Defra issued revised 2018 based background maps for nitrogen oxide (NO_x), NO₂, PM₁₀ and PM_{2.5}.

Table 6-2. Published Background Air Quality Levels ($\mu\text{g}/\text{m}^3$)

Receptor Location	2019			
	NO _x	NO ₂	PM ₁₀	PM _{2.5}
Local Authority Monitoring				
HILL02	35.01	23.46	16.58	11.33
HILL23	33.38	22.82	16.99	11.39
HILL24	28.99	20.13	16.15	10.96
Existing Sensitive Receptors				
R1	35.01	23.46	16.58	11.33
R2	35.01	23.46	16.58	11.33
R3	28.29	19.72	15.65	10.71
R4	28.29	19.72	15.65	10.71
R5	28.29	19.72	15.65	10.71
R6	33.38	22.82	16.99	11.39
R7	33.38	22.82	16.99	11.39
R8	35.01	23.46	16.58	11.33
R9	35.01	23.46	16.58	11.33
R10	35.01	23.46	16.58	11.33
R11	35.01	23.46	16.58	11.33
R12	35.01	23.46	16.58	11.33
R13	35.17	23.72	17.16	11.62
R14	35.17	23.72	17.16	11.62
R15	35.17	23.72	17.16	11.62
R16	35.17	23.72	17.16	11.62
R17	35.17	23.72	17.16	11.62
R18	35.17	23.72	17.16	11.62
R19	35.17	23.72	17.16	11.62
R20	35.01	23.46	16.58	11.33
R21	28.29	19.72	15.65	10.71

All the Defra background concentrations detailed in **Table 6-2** for 2019, show that the background levels are predicted to be below the relevant AQO within the study area.

A breakdown of the background source apportionment of NO_x concentrations at each monitoring location and receptor is shown in

Table 6-3.

Table 6-3. Pollutant Source Apportionment of NO_x (µg/m³)

Receptor Location	2019						
	Total NO _x	% of NO _x from Road Sources	% of NO _x from Industrial Sources	% of NO _x from Domestic Sources	% of NO _x from Aircraft Sources	% of NO _x from Rail Sources	% of NO _x from Other Sources
Local Authority Monitoring							
HILL02	35.01	43.08	3.60	12.94	2.71	2.12	35.56
HILL23	33.38	55.28	3.41	8.02	2.29	2.01	28.99
HILL24	28.99	43.41	4.28	10.44	3.91	3.14	34.82
Existing Sensitive Receptors							
R1	35.01	43.08	3.60	12.94	2.71	2.12	35.56
R2	35.01	43.08	3.60	12.94	2.71	2.12	35.56
R3	28.29	42.91	4.25	11.28	3.25	2.66	35.65
R4	28.29	42.91	4.25	11.28	3.25	2.66	35.65
R5	28.29	42.91	4.25	11.28	3.25	2.66	35.65
R6	33.38	55.28	3.41	8.02	2.29	2.01	28.99
R7	33.38	55.28	3.41	8.02	2.29	2.01	28.99
R8	35.01	43.08	3.60	12.94	2.71	2.12	35.56
R9	35.01	43.08	3.60	12.94	2.71	2.12	35.56
R10	35.01	43.08	3.60	12.94	2.71	2.12	35.56
R11	35.01	43.08	3.60	12.94	2.71	2.12	35.56
R12	35.01	43.08	3.60	12.94	2.71	2.12	35.56
R13	35.17	51.08	3.83	9.71	3.28	2.54	29.57
R14	35.17	51.08	3.83	9.71	3.28	2.54	29.57
R15	35.17	51.08	3.83	9.71	3.28	2.54	29.57
R16	35.17	51.08	3.83	9.71	3.28	2.54	29.57
R17	35.17	51.08	3.83	9.71	3.28	2.54	29.57
R18	35.17	51.08	3.83	9.71	3.28	2.54	29.57
R19	35.17	51.08	3.83	9.71	3.28	2.54	29.57
R20	35.01	43.08	3.60	12.94	2.71	2.12	35.56
R21	28.29	42.91	4.25	11.28	3.25	2.66	35.65

Table 6-3 shows that the major background source of NO_x at the monitoring, sensitive receptor locations where sources have been identified are mainly comprised of road sources.

A review of the Defra background site has determined that they are in line with the Local Authority monitoring within LBoH.

Table 6-4 shows the background concentrations utilised within the assessment.

Table 6-4. Utilised Background Concentrations ($\mu\text{g}/\text{m}^3$)

Receptor Location	2019		Source
	NO _x	NO ₂	
Local Authority Monitoring			
HILL02	35.01	23.46	Defra Background Maps
HILL23	33.38	22.82	
HILL24	28.99	20.13	
Existing Sensitive Receptors			
R1	35.01	23.46	Defra Background Maps
R2	35.01	23.46	
R3	28.29	19.72	
R4	28.29	19.72	
R5	28.29	19.72	
R6	33.38	22.82	
R7	33.38	22.82	
R8	35.01	23.46	
R9	35.01	23.46	
R10	35.01	23.46	
R11	35.01	23.46	
R12	35.01	23.46	
R13	35.17	23.72	
R14	35.17	23.72	
R15	35.17	23.72	
R16	35.17	23.72	
R17	35.17	23.72	
R18	35.17	23.72	
R19	35.17	23.72	
R20	35.01	23.46	
R21	28.29	19.72	

6.3 MODEL VERIFICATION

Model verification involves the comparison of modelled data to monitored data in order to gain the best possible representation of current pollutant concentrations for the assessment years. The verification process is in general accordance with that contained in Section 7 of the TG16 guidance note and uses the most recently available diffusion tube monitoring data to best represent this.

The verification process consists of using the monitoring data and the published background air quality data in the UK National Air Quality Information Archive to calculate the road traffic contribution of NO_x at the monitoring locations. Outputs from the ADMS Roads model are provided as predicted road traffic contribution NO_x emissions. These are converted into predicted roadside contribution NO₂ exposure at the relevant receptor locations based on the updated approach to deriving NO₂ from NO_x for road traffic sources published in Local Air Quality Management TG16. The calculation was derived using the NO_x to NO₂ worksheet in the online LAQM tools website hosted by Defra. **Table 6-5** summarises the final model/monitored data correlation following the application of the model correction factor.

Table 6-5. Comparison of Roadside Modelling & Monitoring Results for NO₂

Link	NO ₂ µg/m ³		
	Monitored NO ₂	Modelled NO ₂	Difference (%)
HILL02	38.60	39.73	2.92
HILL23	29.30	31.10	6.13
HILL24	34.70	31.87	-8.15

The final model produced data at the monitoring locations to within 10% of the monitoring results at all of the verification points, as recommended by TG16 guidance.

The final verification model correlation coefficient (representing the model uncertainty) is 1.00. This was achieved by applying a model correction factor of 1.88 to roadside predicted NO_x concentrations before converting to NO₂. This figure demonstrates that the model predictions were in line with the road traffic emissions at the monitoring locations.

6.4 ADMS-ROADS MODEL INPUTS

Table 6-6. Summary of ADMS Roads Model Inputs

Parameter	Description	Input Value
Chemistry	A facility within ADMS-Roads to calculate the chemical reactions in the atmosphere between Nitric Oxide (NO), NO ₂ , Ozone (O ₃) and Volatile organic compounds (VOCs).	No atmospheric chemistry parameters included
Meteorology	Representative meteorological data from a local source	Heathrow Airport 2019 Meteorological Station , hourly sequential data
Surface Roughness	A setting to define the surface roughness of the model area based upon its location.	1m representing a typical surface roughness for Cities and Woodlands was used for the Site and the met. Measurement site.
Latitude	Allows the location of the model area to be set	United Kingdom = 51.55
Monin-Obukhov Length	This allows a measure of the stability of the atmosphere within the model area to be specified depending upon its character.	Cities and Large Towns= 30m was used for the Site Mixed Urban / Industrial = 30m was used for the met. Measurement site.
Elevation of Road	Allows the height of the road link above ground level to be specified.	All other road links were set at ground level = 0m .
Road Width	Allows the width of the road link to be specified.	Road width used depended on data obtained from OS map data for the specific road link
Topography	This enables complex terrain data to be included within the model in order to account for turbulence and plume spread effects of topography	No topographical information used
Time Varied Emissions	This enables daily, weekly or monthly variations in emissions to be applied to road sources	No time varied emissions used
Road Type	Allows the effect of different types of roads to be assessed.	London - Outer settings were used for the relevant links
Road Speeds	Enables individual road speeds to be added for each road link	Based on national speed limits
Canyon Height	Allows the model to take account turbulent flow patterns occurring inside a street with relatively tall buildings on both sides, known as a "street canyon".	No canyons used within the model
Road Source Emissions	Road source emission rates are calculated from traffic flow data using the in-built EFT database of traffic emission factors.	The EFT Version 10.1 (2020) dataset was used.
Year	Predicted EFT emissions rates depend on the year of emission.	2019 data for verification and baseline Operational Phase Assessment. 2022 data for the Operational Phase Traffic Assessment. 2022 data for the Operational Phase Assessment, using 2019 EFT.

6.5 ADMS MODELLING RESULTS

6.5.1 Traffic Assessment

The ADMS Model has predicted concentrations of NO₂, PM₁₀ and PM_{2.5} at relevant receptor locations adjacent to roads likely to be affected by the development, as summarised in the following tables. Only receptors close to roads where there is predicted to be a change in emissions have been assessed.

6.5.2 Assessment Scenarios

For the operational year of 2022, assessment of the effects of emissions from the proposed traffic associated with the scheme, has been undertaken using the Emissions Factor Toolkit (EFT) 2022 emissions rates which take into account of the rate of reduction in emission from road vehicles into the future with the following factors:

- 2019 Baseline = Existing Baseline conditions;
- 2022 “Do Minimum” = 2022 Baseline + Committed Development Flows (through local growth factor); and,
- 2022 “Do Something” = 2022 Baseline + Committed Development Flows (through local growth factor) + Development Traffic Flows.

Additionally, a sensitivity, theoretical, test has been undertaken in Appendix C assuming no improvements in vehicle emissions between the baseline year of 2019 and the opening year of 2022.

6.5.3 Operational Traffic Assessment

Nitrogen Dioxide

Table 6-7 presents a summary of the predicted change in NO₂ concentrations at relevant receptor locations, due to changes in traffic flow associated with the proposed development, based on modelled ‘Do Minimum’ and ‘Do Something’ scenarios.

Table 6-7. Predicted Annual Average Concentrations of NO₂ at Receptor Locations

Receptor		NO ₂ (µg/m ³)			
		2019 Baseline	2022 Do Minimum	2022 Do Something	Development Contribution
R1	67 Belmont Road	26.58	25.90	25.91	0.01
R2	Hermitage Primary School	25.82	25.32	25.32	<0.01
R3	201 Park Road	31.19	28.62	28.63	0.01
R4	Uxbridge College	22.99	22.26	22.26	<0.01
R5	114 Park Road	29.09	27.02	27.04	0.02
R6	249 Park Road	34.11	31.62	31.62	<0.01
R7	247 Harefield Road	29.50	28.01	28.01	<0.01
R8	Laburnum Court 9 Harefield Road	27.57	26.69	26.69	<0.01
R9	The Cedars 66 High Street	32.53	30.62	30.62	<0.01
R10	Cave House Osborn Road	34.82	32.32	32.32	<0.01
R11	10 Frays Court Victoria Road	32.79	30.70	30.70	<0.01
R12	3 Lynch Close	33.64	31.32	31.32	<0.01
R13	5 Cochrane House Cowley Road	40.15	36.50	36.50	<0.01
R14	27 Cochrane House Crowley Road	39.04	35.57	35.57	<0.01
R15	51 Cobden Close	28.82	27.61	27.61	<0.01
R16	Whitehall Nursery & Infants Sc	27.90	26.90	26.90	<0.01
R17	St Andrews CofE Primary School	29.92	28.56	28.56	<0.01
R18	75 Hillingdon Road	34.24	32.03	32.03	<0.01
R19	11 Park Court Park Road	31.44	29.72	29.73	0.01
R20	Uxbridge Day Nursery Park Road	35.88	33.10	33.11	0.01
R21	119 Park Road	29.45	27.26	27.26	<0.01
Annual Mean AQO		40 µg/m ³			


All modelled existing receptors are predicted to be below the AQO for NO₂ in both the ‘Do Minimum’ and ‘Do Something’ scenarios.

As indicated in **Table 6-7**, the maximum predicted increase in annual average exposure to NO₂ at any existing receptor, due to changes in traffic movements associated with the proposed development is likely to be 0.02 µg/m³ at 114 Park Road (R5).

The predicted long-term NO₂ concentrations at all existing receptors are well below 60 µg/m³ in all scenarios. Therefore, it is unlikely there will be any exceedances for the short-term NO₂ AQO at all modelled receptors as outlined in LAQM TG16 technical guidance.

Figure 6-1 below illustrate the Total Long Term Annual Average Nitrogen Dioxide (NO₂) Concentration and contribution at the Proposed Development (µg/m³).

Figure 6-1. Total Long Term Annual Average Nitrogen Dioxide (NO₂) Concentration Across the Study Area (µg/m³)

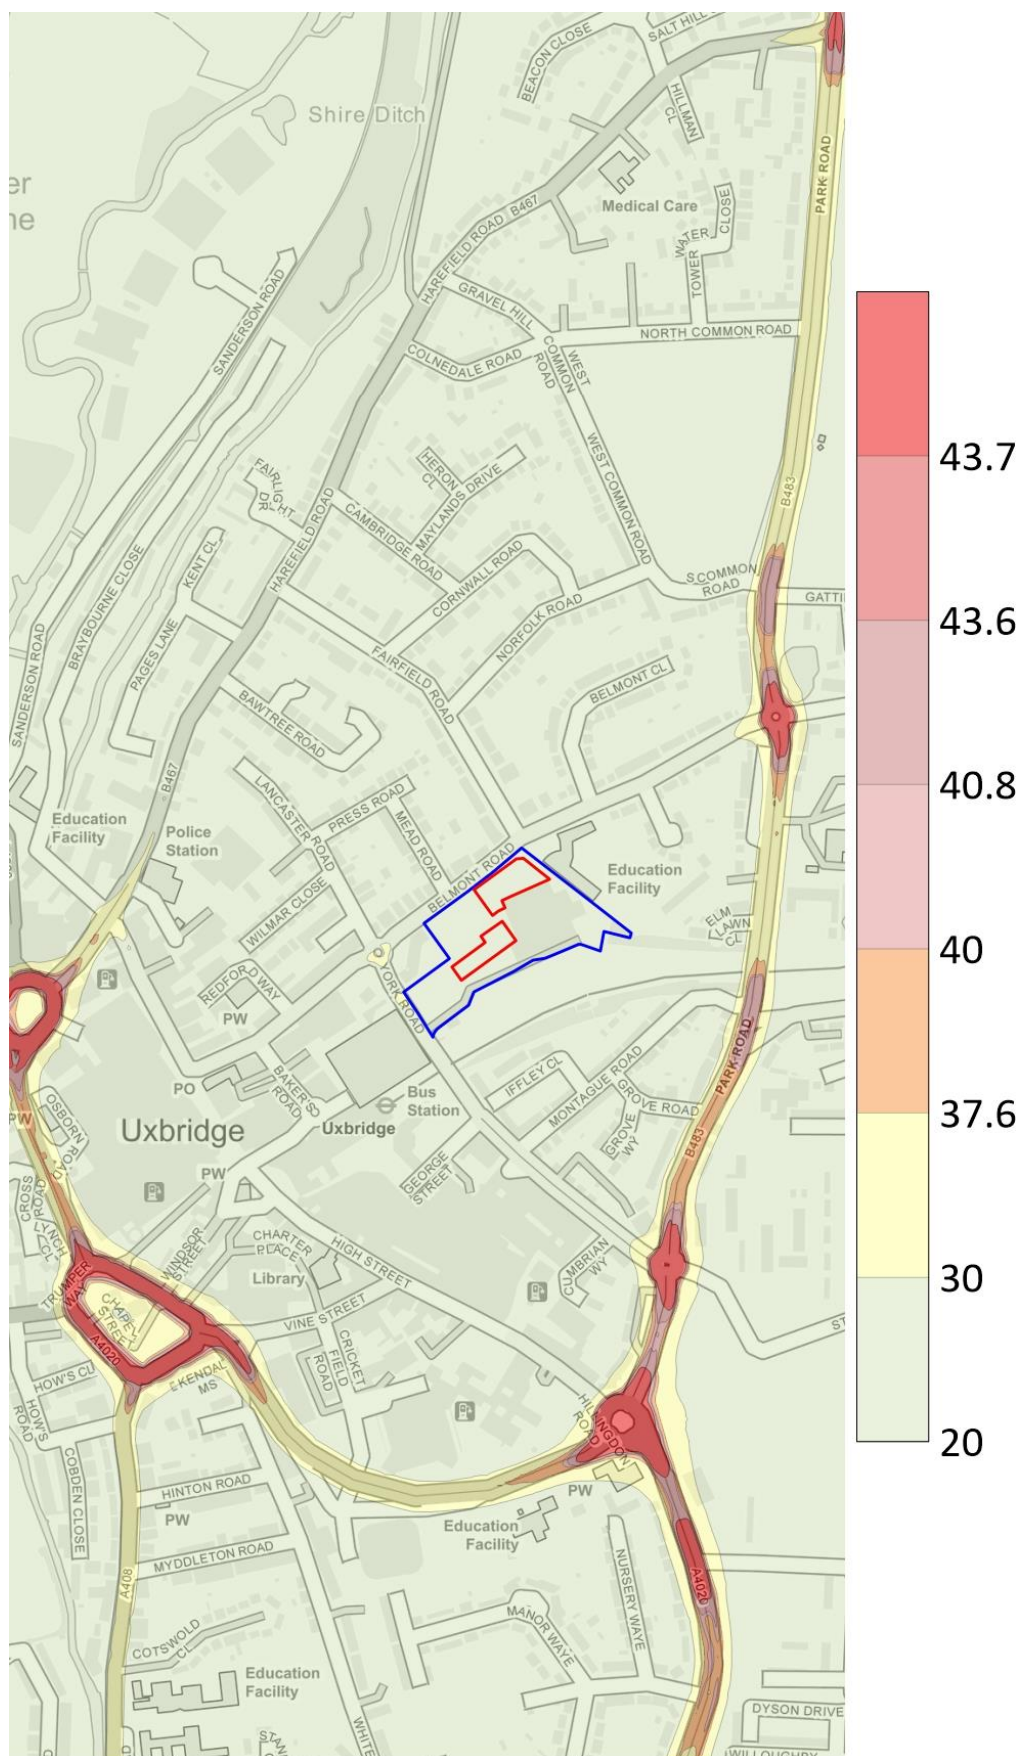

The impact description of changes in traffic flow associated with the proposed development with respect to annual mean NO₂ exposure has been assessed with reference to the criteria in Section 3. The outcomes of the assessment are summarised in **Table 6-8**.

Table 6-8. Impact Description of Effects at Key Receptors (NO₂)

Impact Description of NO ₂ Effects at Key Receptors					
Receptor	Change Due to Development (DS-DM) (µg/m ³)	Change due to Development (% of AQO)	% Change in Concentration Relative to AQO	% Annual Mean Concentration in Assessment Year	Impact Description
R1	0.01	0.03	0%	≤75% of AQO	Negligible
R2	<0.01	0.00	0%	≤75% of AQO	Negligible
R3	0.01	0.03	0%	≤75% of AQO	Negligible
R4	<0.01	0.00	0%	≤75% of AQO	Negligible
R5	0.02	0.03	0%	≤75% of AQO	Negligible
R6	<0.01	0.00	0%	76-94% of AQO	Negligible
R7	<0.01	0.00	0%	≤75% of AQO	Negligible
R8	<0.01	0.00	0%	≤75% of AQO	Negligible
R9	<0.01	0.00	0%	76-94% of AQO	Negligible
R10	<0.01	0.00	0%	76-94% of AQO	Negligible
R11	<0.01	0.00	0%	76-94% of AQO	Negligible
R12	<0.01	0.00	0%	76-94% of AQO	Negligible
R13	<0.01	0.00	0%	76-94% of AQO	Negligible
R14	<0.01	0.00	0%	76-94% of AQO	Negligible
R15	<0.01	0.00	0%	≤75% of AQO	Negligible
R16	<0.01	0.00	0%	≤75% of AQO	Negligible
R17	<0.01	0.00	0%	≤75% of AQO	Negligible
R18	<0.01	0.00	0%	76-94% of AQO	Negligible
R19	0.01	0.03	0%	≤75% of AQO	Negligible
R20	0.01	0.03	0%	76-94% of AQO	Negligible
R21	<0.01	0.00	0%	≤75% of AQO	Negligible

+0% means a change of <0.5% as per explanatory note 2 of table 6.3 of the EPUK IAQM Guidance.

The impact description of the effects of changes in traffic flow as a result of the proposed development, with respect to NO₂ exposure for existing receptors, is determined to be 'negligible' at all modelled receptors. This is based on the methodology outlined in section 3. Given the quantitative nature of the assessment and the verification of the air quality dispersion model, the level of accuracy of the assessment results is considered to be 'high'.

Particulate Matter (PM₁₀)

Table 6-9 presents a summary of the predicted change in annual mean PM₁₀ concentrations at relevant receptor locations, due to changes in traffic flow associated with the proposed development, based on modelled 'Do Minimum' and 'Do Something' scenarios.

Table 6-9. Predicted Annual Average Concentrations of PM₁₀ at Receptor Locations

Receptor		PM ₁₀ (µg/m ³)			
		2019 Baseline	2022 Do Minimum	2022 Do Something	Development Contribution
R1	67 Belmont Road	17.10	17.08	17.08	<0.01
R2	Hermitage Primary School	17.04	17.03	17.03	<0.01
R3	201 Park Road	17.51	17.45	17.45	<0.01
R4	Uxbridge College	16.28	16.26	16.26	<0.01
R5	114 Park Road	17.56	17.51	17.51	<0.01
R6	249 Park Road	18.88	18.81	18.81	<0.01
R7	247 Harefield Road	18.09	18.05	18.05	<0.01
R8	Laburnum Court 9 Harefield Road	17.29	17.27	17.27	<0.01
R9	The Cedars 66 High Street	18.09	18.04	18.04	<0.01
R10	Cave House Osborn Road	18.45	18.39	18.39	<0.01
R11	10 Frays Court Victoria Road	18.11	18.06	18.06	<0.01
R12	3 Lynch Close	18.24	18.18	18.18	<0.01
R13	5 Cochrane House Cowley Road	19.86	19.76	19.76	<0.01
R14	27 Cochrane House Crowley Road	19.66	19.58	19.58	<0.01
R15	51 Cobden Close	18.10	18.07	18.07	<0.01
R16	Whitehall Nursery & Infants Sc	18.01	17.99	17.99	<0.01
R17	St Andrews CofE Primary School	18.41	18.38	18.38	<0.01
R18	75 Hillingdon Road	19.27	19.21	19.21	<0.01
R19	11 Park Court Park Road	18.53	18.49	18.49	<0.01
R20	Uxbridge Day Nursery Park Road	18.68	18.61	18.61	<0.01
R21	119 Park Road	17.25	17.19	17.19	<0.01
Annual Mean AQO		40 µg/m ³			

All modelled existing receptors are predicted to be below the AQO for PM₁₀ in both the 'Do Minimum' and 'Do Something' scenarios.

As indicated in

Table 6-9, the maximum predicted increase in annual average exposure to PM₁₀ at any existing receptor, due to changes in traffic movements associated with the proposed development is <0.01 µg/m³ at all modelled sensitive receptors.

The impact description of changes in traffic flow associated with the proposed development with respect to annual mean PM₁₀ exposure has been assessed with reference to the criteria in Section 3. The outcomes of the assessment are summarised in

Table 6-10.

Table 6-10. Impact Description of Effects at Key Receptors (PM₁₀)

Impact Description of PM ₁₀ Effects at Key Receptors					
Receptor	Change Due to Development (DS-DM) (µg/m³)	Change due to Development (% of AQO)	% Change in Concentration Relative to AQO	% Annual Mean Concentration in Assessment Year	Impact Description
R1	<0.01	0.00	0%	≤75% of AQO	Negligible
R2	<0.01	0.00	0%	≤75% of AQO	Negligible
R3	<0.01	0.00	0%	≤75% of AQO	Negligible
R4	<0.01	0.00	0%	≤75% of AQO	Negligible
R5	<0.01	0.00	0%	≤75% of AQO	Negligible
R6	<0.01	0.00	0%	≤75% of AQO	Negligible
R7	<0.01	0.00	0%	≤75% of AQO	Negligible
R8	<0.01	0.00	0%	≤75% of AQO	Negligible
R9	<0.01	0.00	0%	≤75% of AQO	Negligible
R10	<0.01	0.00	0%	≤75% of AQO	Negligible
R11	<0.01	0.00	0%	≤75% of AQO	Negligible
R12	<0.01	0.00	0%	≤75% of AQO	Negligible
R13	<0.01	0.00	0%	≤75% of AQO	Negligible
R14	<0.01	0.00	0%	≤75% of AQO	Negligible
R15	<0.01	0.00	0%	≤75% of AQO	Negligible
R16	<0.01	0.00	0%	≤75% of AQO	Negligible
R17	<0.01	0.00	0%	≤75% of AQO	Negligible
R18	<0.01	0.00	0%	≤75% of AQO	Negligible
R19	<0.01	0.00	0%	≤75% of AQO	Negligible
R20	<0.01	0.00	0%	≤75% of AQO	Negligible
R21	<0.01	0.00	0%	≤75% of AQO	Negligible

+0% means a change of <0.5% as per explanatory note 2 of table 6.3 of the EPUK IAQM Guidance.

The impact description of the effects of changes in traffic as a result of the proposed development, with respect to annual mean PM₁₀ exposure for existing receptors is determined to be 'negligible' based on the methodology outlined in section 3. Given the quantitative nature of the assessment and the verification of the air quality dispersion model, the level of accuracy of the assessment results is considered to be 'high'.

Particulate Matter (PM_{2.5})

Table 6-11 presents a summary of the predicted change in annual mean PM_{2.5} concentrations at relevant receptor locations, due to changes in traffic flow associated with the proposed development, based on modelled 'Do Minimum' and 'Do Something' scenarios.

Table 6-11. Predicted Annual Average Concentrations of PM_{2.5} at Receptor Locations

Receptor		PM _{2.5} (µg/m ³)			
		2019 Baseline	2022 Do Minimum	2022 Do Something	Development Contribution
R1	67 Belmont Road	11.65	11.63	11.63	<0.01
R2	Hermitage Primary School	11.61	11.59	11.59	<0.01
R3	201 Park Road	11.86	11.77	11.77	<0.01
R4	Uxbridge College	11.09	11.07	11.07	<0.01
R5	114 Park Road	11.86	11.79	11.79	<0.01
R6	249 Park Road	12.55	12.47	12.47	<0.01
R7	247 Harefield Road	12.07	12.02	12.02	<0.01
R8	Laburnum Court 9 Harefield Road	11.77	11.74	11.74	<0.01
R9	The Cedars 66 High Street	12.27	12.20	12.20	<0.01
R10	Cave House Osborn Road	12.49	12.41	12.41	<0.01
R11	10 Frays Court Victoria Road	12.28	12.21	12.21	<0.01
R12	3 Lynch Close	12.36	12.28	12.28	<0.01
R13	5 Cochrane House Cowley Road	13.30	13.17	13.17	<0.01
R14	27 Cochrane House Crowley Road	13.17	13.05	13.05	<0.01
R15	51 Cobden Close	12.19	12.15	12.15	<0.01
R16	Whitehall Nursery & Infants Sc	12.13	12.10	12.10	<0.01
R17	St Andrews CofE Primary School	12.37	12.33	12.33	<0.01
R18	75 Hillingdon Road	12.90	12.82	12.82	<0.01
R19	11 Park Court Park Road	12.46	12.40	12.40	<0.01
R20	Uxbridge Day Nursery Park Road	12.63	12.53	12.53	<0.01
R21	119 Park Road	11.69	11.62	11.62	<0.01
Annual Mean AQO		25 µg/m ³			

All modelled existing receptors are predicted to be below the AQO for PM_{2.5} in both the 'Do Minimum' and 'Do Something' scenarios.

As indicated in

Table 6-11, the maximum predicted increase in annual average exposure to PM_{2.5} at any existing receptor, due to changes in traffic movements associated with the proposed development is <0.01 µg/m³ at all modelled sensitive receptors.

The impact description of changes in traffic flow associated with the proposed development with respect to annual mean PM_{2.5} exposure has been assessed with reference to the criteria in Section 3. The outcomes of the assessment are summarised in

Table 6-12.

Table 6-12. Impact Description of Effects at Key Receptors (PM_{2.5})

Impact Description of PM _{2.5} Effects at Key Receptors					
Receptor	Change Due to Development (DS-DM) (µg/m³)	Change due to Development (% of AQO)	% Change in Concentration Relative to AQO	% Annual Mean Concentration in Assessment Year	Impact Description
R1	<0.01	0.00	0%	≤75% of AQO	Negligible
R2	0.01	0.00	0%	≤75% of AQO	Negligible
R3	<0.01	0.00	0%	≤75% of AQO	Negligible
R4	<0.01	0.00	0%	≤75% of AQO	Negligible
R5	<0.01	0.00	0%	≤75% of AQO	Negligible
R6	<0.01	0.00	0%	≤75% of AQO	Negligible
R7	<0.01	0.00	0%	≤75% of AQO	Negligible
R8	<0.01	0.00	0%	≤75% of AQO	Negligible
R9	<0.01	0.00	0%	≤75% of AQO	Negligible
R10	<0.01	0.00	0%	≤75% of AQO	Negligible
R11	<0.01	0.00	0%	≤75% of AQO	Negligible
R12	<0.01	0.00	0%	≤75% of AQO	Negligible
R13	<0.01	0.00	0%	≤75% of AQO	Negligible
R14	<0.01	0.00	0%	≤75% of AQO	Negligible
R15	<0.01	0.00	0%	≤75% of AQO	Negligible
R16	<0.01	0.00	0%	≤75% of AQO	Negligible
R17	<0.01	0.00	0%	≤75% of AQO	Negligible
R18	<0.01	0.00	0%	≤75% of AQO	Negligible
R19	<0.01	0.00	0%	≤75% of AQO	Negligible
R20	<0.01	0.00	0%	≤75% of AQO	Negligible
R21	<0.01	0.00	0%	≤75% of AQO	Negligible

+0% means a change of <0.5% as per explanatory note 2 of table 6.3 of the EPUK IAQM Guidance.

The impact description of the effects of changes in traffic as a result of the proposed development, with respect to annual mean PM₁₀ exposure for existing receptors is determined to be 'negligible' based on the methodology outlined in section 3. Given the quantitative nature of the assessment and the verification of the air quality dispersion model, the level of accuracy of the assessment results is considered to be 'high'.

7.0 AIR QUALITY NEUTRAL

This Air Quality Neutral assessment considers the emissions of atmospheric pollutants from the development at source (i.e. from vehicles and building services plant) and compares the emissions with the benchmark levels that define neutrality.

The requirement for this Air Quality Neutral report is driven by:

- Policy SI 1 in the London Plan. The London Plan states: “development proposals should be at least ‘air quality neutral’ and not lead to further deterioration of existing poor air quality”; and
- The Mayor’s Air Quality Strategy (MAQS). The MAQS includes a policy which states that “New developments in London shall as a minimum be ‘air quality’ neutral through the adoption of best practice in the management and mitigation of emissions.”

The ‘air quality neutral’ policy is designed to address the problem of multiple new developments that individually add only a small increment to pollution at the point of human exposure (i.e. ambient concentrations), but cumulatively lead to baseline pollution levels creeping up. The policy requires Developers to design their schemes so that they are at least Air Quality Neutral in terms of emissions at source.

The Greater London Authority (GLA) Sustainable Design and Construction Supplementary Planning Guidance (SPG), published in April 2014, provides a formal definition for the term ‘air quality neutral’ and allows a transparent and consistent approach to demonstrating whether a development is ‘air quality neutral’. This Air Quality Neutral assessment determines whether the proposed development is air quality neutral using the GLA SPG calculation method that separately quantifies building emissions (from heating and power plant) and transport emissions.

The GLA published a report titled “Air Quality Neutral Planning support update (GLA 80371)” in April 2014. This updated report provided a guidance note on the application of the air quality neutral policy.

7.1 BENCHMARK EMISSIONS

Buildings Emissions Benchmark (BEB)

The GLA 80371 report has defined two Building Emission Benchmarks (BEB), one for NO_x and one for PM₁₀, for a series of land-use classes. The benchmarks are expressed in terms of g/m²/annum. The gross floor area (GFA) is used to define the area.

The derived BEBs for NO_x and PM₁₀ Emissions are shown in

Table 7-1.

Table 7-1. Building Emissions Benchmarks

Land Use	NO _x (g/m ²)	PM ₁₀ (g/m ²)
E(a) – Formerly Class A1	22.6	1.29
E(b) – Formerly Class A3- A5	75.2	4.32
E(c) – Formerly Class A2 and Class B1	30.8	1.77
Class B2- B7	36.6	2.95
Class B8	23.6	1.90
Class C1	70.9	4.07
Class C2	68.5	5.97
Class C3	26.2	2.28
E(e) – Formerly D1 (a)	43.0	2.47
E(f) – Formerly D1 (b)	75.0	4.30
F1 - Formerly Class D1(c -h)	31.0	1.78
Sui Generis – Formerly Class D2(a-d)	90.3	5.18

Note 1: These benchmarks have been calibrated for London.

7.2 TRANSPORT EMISSIONS BENCHMARKS

The derived Transport Emission Benchmarks (TEB) for NO_x and PM₁₀ Emissions are shown in **Table 7-2**.

Table 7-2. Transport Emissions Benchmarks

Land use	CAZ	Inner	Outer
NO_x (g/m²/annum)			
Retail (E(a))	169	219	249
Office & Commercial (E(c))	1.27	11.4	68.5
NO_x (g/m²/annum)			
Residential (C3)	234	558	1553
PM₁₀ (g/m²/annum)			
Retail (E(a))	29.3	39.3	42.9
Office & Commercial (E(c))	0.22	2.05	11.8
PM₁₀ (g/dwelling/annum)			
Residential (C3, C4)	40.7	100	267

7.3 TRANSPORT EMISSIONS BENCHMARKS

Building Emissions

The proposed development does not include any additional Combined Heat and Power (CHP) or other heat sources emissions. Therefore, there will be no exceedance of the building emissions benchmarks and the development will be 'neutral' in terms of buildings.

Transport Emissions

The transport assessment provides a summary of daily 2-way trips generation by the proposed development:

Vehicle Trips

Mayer Brown Ltd, have provided development trips associated with the development purpose of the Air Quality Neutral assessment of transport emissions.

Table 7-3. Transport Emissions Land Use Class and Development Trips

Land Use / Area	Land Use	Area	Traffic				Floor Area (sqm) (GIA)
			Light Vehicles	HGVs	Total	Annual Trips	
Retail	E(a)	Outer	48	0	48	17,520	720

The average journey lengths for residential, office and retail developments are presented in **Table 7-4**. The average emissions rates for cars, in g/veh-km, for CAZ, Inner and Outer London per vehicle-km are presented in **Table 7-4**.

Table 7-4. Average Distance Travelled by Car per Trip

Land Use Class	Distance (km)		
	CAZ	Inner	Outer
Residential (C3) ⁽¹⁾	4.3	3.7	11.4
Office & Commercial (E(c))*	3.0	7.7	10.8
Retail (E(a))	9.3	5.9	5.4

(1) Based on the LTDS destination.

Note these distances are based on the straight line between the origin and destination of a trip not the actual trip lengths.

Table 7-5. Emission Factors

Land Use Class	g/vehicle-km		
	CAZ	Inner	Outer
NO _x	0.4224	0.370	0.353
PM ₁₀	0.0733	0.0665	0.0606

Transport Emissions

The average distance travelled for Retail use (E(a)) is 5.4 km per trip. The NO_x emission factor is 0.353 g/veh-km (for outer London) and 0.0606 g/veh-km for PM₁₀ and thus the development transport emissions are as follows.

Vehicle Trips

The total benchmarked building NO_x and PM₁₀ emissions are calculated from the land use categories and the TEBs and are shown in **Table 7-6**. Where no benchmark has been defined, a worst-case benchmark has been used.

Table 7-6. Calculation of Benchmark NO_x emissions Using Transport Emissions Benchmarks for Each Land-use Category

Land Use Class	GIA m ²	NO _x Transport Emissions Benchmarks (gNO _x /m ² /annum)	PM ₁₀ Transport Emissions Benchmarks (gNO _x /m ² /annum)	NO _x Benchmark Emissions (kgNO _x /annum)	PM ₁₀ Benchmark Emissions (kgNO _x /annum)
Retail (E(a))	720	249.00	42.90	179.28	30.89
Total Benchmark Transport Emissions				179.28	30.89

Table 7-7. Calculation of Air Quality Neutral Transport Emissions

Land Use / Area	Land Use Class	Annual Trips	NOx Emission Factor (g/vehicle-km)	PM10 Emission Factor (g/vehicle-km)	Average Distance Travelled (km)	NOx Transport Emissions (kg/annum)	PM10 Transport Emissions (kg/annum)
Retail	E(a)	17520	0.353	0.0606	5.4	33.40	5.73
Total Calculated Transport Emissions (kg/annum)						33.40	5.73

Table **Table 7-7** shows the calculation results for air quality neutral transport emissions. The total transport NO_x emission of 33.40 kg/annum for NO_x and 5.73 kg/annum for PM₁₀ may be compared with the total benchmarked transport NO_x emission of 179.28 kg/annum and 30.89 kg/annum respectively. The results indicate that the transport emission of NO_x and PM₁₀ are below the benchmark criteria in **Table 7-6** and can therefore be considered air quality neutral.

7.4 SUMMARY OF AIR QUALITY NEUTRAL ASSESSMENT

The proposed development will not include installation of any additional CHP or other heat source emissions and can therefore be considered air quality neutral. Both transport NO_x emissions and transport PM₁₀ emissions are below the transport emission benchmark and the development can be considered Air Quality Neutral.

8.0 MITIGATION

8.1 CONSTRUCTION PHASE

The dust risk categories have been determined in Section 5 for each of the four construction activities. The assessment has determined that the potential impact description of dust emissions associated with the construction phase of the proposed development is 'medium risk' at the worst affected receptors.

Using the methodology described in Appendix A, appropriate site-specific mitigation measures associated with the determined level of risk can be found in Section 8.2 of the 'IAQM Guidance on the Assessment of Dust from Demolition and Construction'.

The mitigation measures have been divided into general measures applicable to all sites and measures applicable specifically to demolition, earthworks, construction and trackout. They are categorised into 'highly recommended' and 'desirable' measures.

The mitigation measures for the proposed development are detailed in **Table 8-1** and **Table 8-2**.

Table 8-1. IAQM Guidance on the Assessment of Dust from Demolition and Construction 'Highly Recommended' Mitigation Measures

Communications
Develop and implement a stakeholder communications plan that includes community engagement before work commences on site.
Display the name and contact details of person(s) accountable for air quality and dust issues on the site boundary. This may be the environment manager/engineer or the site manager.
Display the head or regional office contact information.
Dust Management
Develop and implement a Dust Management Plan (DMP), which may include measures to control other emissions, approved by the Local Authority. The level of detail will depend on the risk, and should include as a minimum the highly recommended measures in this document. The desirable measures should be included as appropriate for the site. In London additional measures may be required to ensure compliance with the Mayor of London's guidance. The DMP may include monitoring of dust deposition, dust flux, real time PM ₁₀ continuous monitoring and/or visual inspections.
Record all dust and air quality complaints, identify cause(s), take appropriate measures to reduce emissions in a timely manner, and record the measures taken.
Make the complaints log available to the local authority when asked.
Record any exceptional incidents that cause dust and/or air emissions, either on- or offsite, and the action taken to resolve the situation in the logbook.
Carry out regular site inspections to monitor compliance with the DMP, record inspection results, and make an inspection log available to the local authority when asked.
Increase the frequency of site inspections by the person accountable for air quality and dust issues on site when activities with a high potential to produce dust are being carried out and during prolonged dry or windy conditions.
Plan site layout so that machinery and dust causing activities are located away from receptors, as far as is possible.
Erect solid screens or barriers around dusty activities or the site boundary that are at least as high as any stockpiles on site.
Fully enclose site or specific operations where there is a high potential for dust production and the site is active for an extensive period.
Avoid site runoff of water or mud.
Keep site fencing, barriers and scaffolding clean using wet methods.
Remove materials that have a potential to produce dust from site as soon as possible, unless being re-used on site. If they are being re-used on-site cover as described below.
Cover, seed or fence stockpiles to prevent wind whipping.

Ensure all on-road vehicles comply with the requirements of the London Low Emission Zone and the London NRMM standards, where applicable.
Ensure all vehicles switch off engines when stationary - no idling vehicles.
Avoid the use of diesel- or petrol-powered generators and use mains electricity or battery powered equipment where practicable.
Produce a Construction Logistics Plan to manage the sustainable delivery of goods and materials.
Only use cutting, grinding or sawing equipment fitted or in conjunction with suitable dust suppression techniques such as water sprays or local extraction, e.g. suitable local exhaust ventilation systems.
Ensure an adequate water supply on the site for effective dust/particulate matter suppression/mitigation, using non-potable water where possible and appropriate.
Use enclosed chutes and conveyors and covered skips.
Minimise drop heights from conveyors, loading shovels, hoppers and other loading or handling equipment and use fine water sprays on such equipment wherever appropriate.
Ensure equipment is readily available on site to clean any dry spillages and clean up spillages as soon as reasonably practicable after the event using wet cleaning methods.
Avoid bonfires and burning of waste materials.
Earthworks
No Action Required.
Construction
Ensure sand and other aggregates are stored in bunded areas and are not allowed to dry out, unless this is required for a particular process, in which case ensure that appropriate additional control measures are in place.
Trackout
Use water-assisted dust sweeper(s) on the access and local roads, to remove, as necessary, any material tracked out of the site. This may require the sweeper being continuously in use.
Avoid dry sweeping of large areas.
Ensure vehicles entering and leaving sites are covered to prevent escape of materials during transport.
Inspect on-site haul routes for integrity and instigate necessary repairs to the surface as soon as reasonably practicable.
Record all inspections of haul routes and any subsequent action in a site logbook.
Install hard surfaced haul routes, which are regularly damped down with fixed or mobile sprinkler systems, or mobile water bowsers and regularly cleaned.
Implement a wheel washing system (with rumble grids to dislodge accumulated dust and mud prior to leaving the site where reasonably practicable).
Ensure there is an adequate area of hard surfaced road between the wheel wash facility and the site exit, wherever site size and layout permits.
Access gates to be located at least 10m from receptors where possible.

Table 8-2. IAQM Guidance on the Assessment of Dust from Demolition and Construction ‘Desirable’ Mitigation Measures

Communications
No Action Required.
Dust Management
Undertake daily on-site and off-site inspection, where receptors (including roads) are nearby, to monitor dust, record inspection results, and make the log available to the local authority when asked. This should include regular dust soiling checks of surfaces such as street furniture, cars and windowsills within 100m of site boundary, with cleaning to be provided if necessary.
Impose and signpost a maximum-speed-limit of 15 mph on surfaced and 10 mph on un-surfaced haul roads and work areas (if long haul routes are required these speeds may be increased with suitable additional control measures provided, subject to the approval of the nominated undertaker and with the agreement of the local authority, where appropriate).
Implement a Travel Plan that supports and encourages sustainable travel (public transport, cycling, walking, and car-sharing).
Earthworks
Re-vegetate earthworks and exposed areas/soil stockpiles to stabilise surfaces as soon as practicable.
Use Hessian, mulches or trackifiers where it is not possible to re-vegetate or cover with topsoil, as soon as practicable.
Only remove the cover in small areas during work and not all at once.
Construction
Avoid scabbling (roughening of concrete surfaces) if possible.

Ensure bulk cement and other fine powder materials are delivered in enclosed tankers and stored in silos with suitable emission control systems to prevent escape of material and overfilling during delivery.

For smaller supplies of fine powder materials ensure bags are sealed after use and stored appropriately to prevent dust.

Trackout

No Action Required.

Following the implementation of the mitigation measures detailed in the tables above, the impact description of the construction phase is not considered to be significant.

9.0 CONCLUSIONS

Tetra Tech have undertaken an Air Quality Assessment to support a planning application for a proposed grocery online (GOL) facility located at the existing Sainsbury's store at York Road, Uxbridge, UB8 1QW.

Construction Phase

Prior to the implementation of appropriate mitigation measures, the potential impact description of dust emissions associated with the construction phase of the proposed development is 'medium risk' at the worst affected receptors without mitigation. However, appropriate site-specific mitigation measures have been proposed based on Section 8.2 of the IAQM Guidance on the Assessment of Dust from Demolition, Earthworks, Construction and Trackout. It is anticipated that with these appropriate mitigation measures in place, the risk of adverse effects due to dust emissions from the construction phase will not be significant.

Operational Assessment

The 2022 assessment of the effect of emissions from traffic associated with the scheme, has determined that the maximum predicted increase in the annual average exposure to NO₂ at any existing receptor is likely to be 0.02 µg/m³ at 114 Park Road (R5).

The predicted long-term NO₂ concentrations at all existing receptors are well below 60 µg/m³ in all scenarios. Therefore, it is unlikely there will be any exceedances for the short-term NO₂ AQO at all existing receptors as outlined in LAQM TG16 technical guidance.

For PM₁₀, the maximum predicted increase in the annual average exposure is likely to be <0.01 µg/m³ at any modelled sensitive receptor. For PM_{2.5}, the maximum predicted increase in the annual average exposure is likely to be <0.01 µg/m³ at any modelled sensitive receptor.


The impact description of the effects of changes in traffic flow as a result of the proposed development, with respect to NO₂, PM₁₀ and PM_{2.5} exposure, is determined to be 'negligible' at all existing receptors.

Given the quantitative nature of the assessment and the verification of the air quality dispersion model, the level of accuracy of the assessment results is considered to be 'high'.

In conclusion, the development is not considered to be contrary to any of the national and local planning policies regarding air quality.

APPENDIX A - FIGURES

Figure A-1 Air Quality Assessment Area

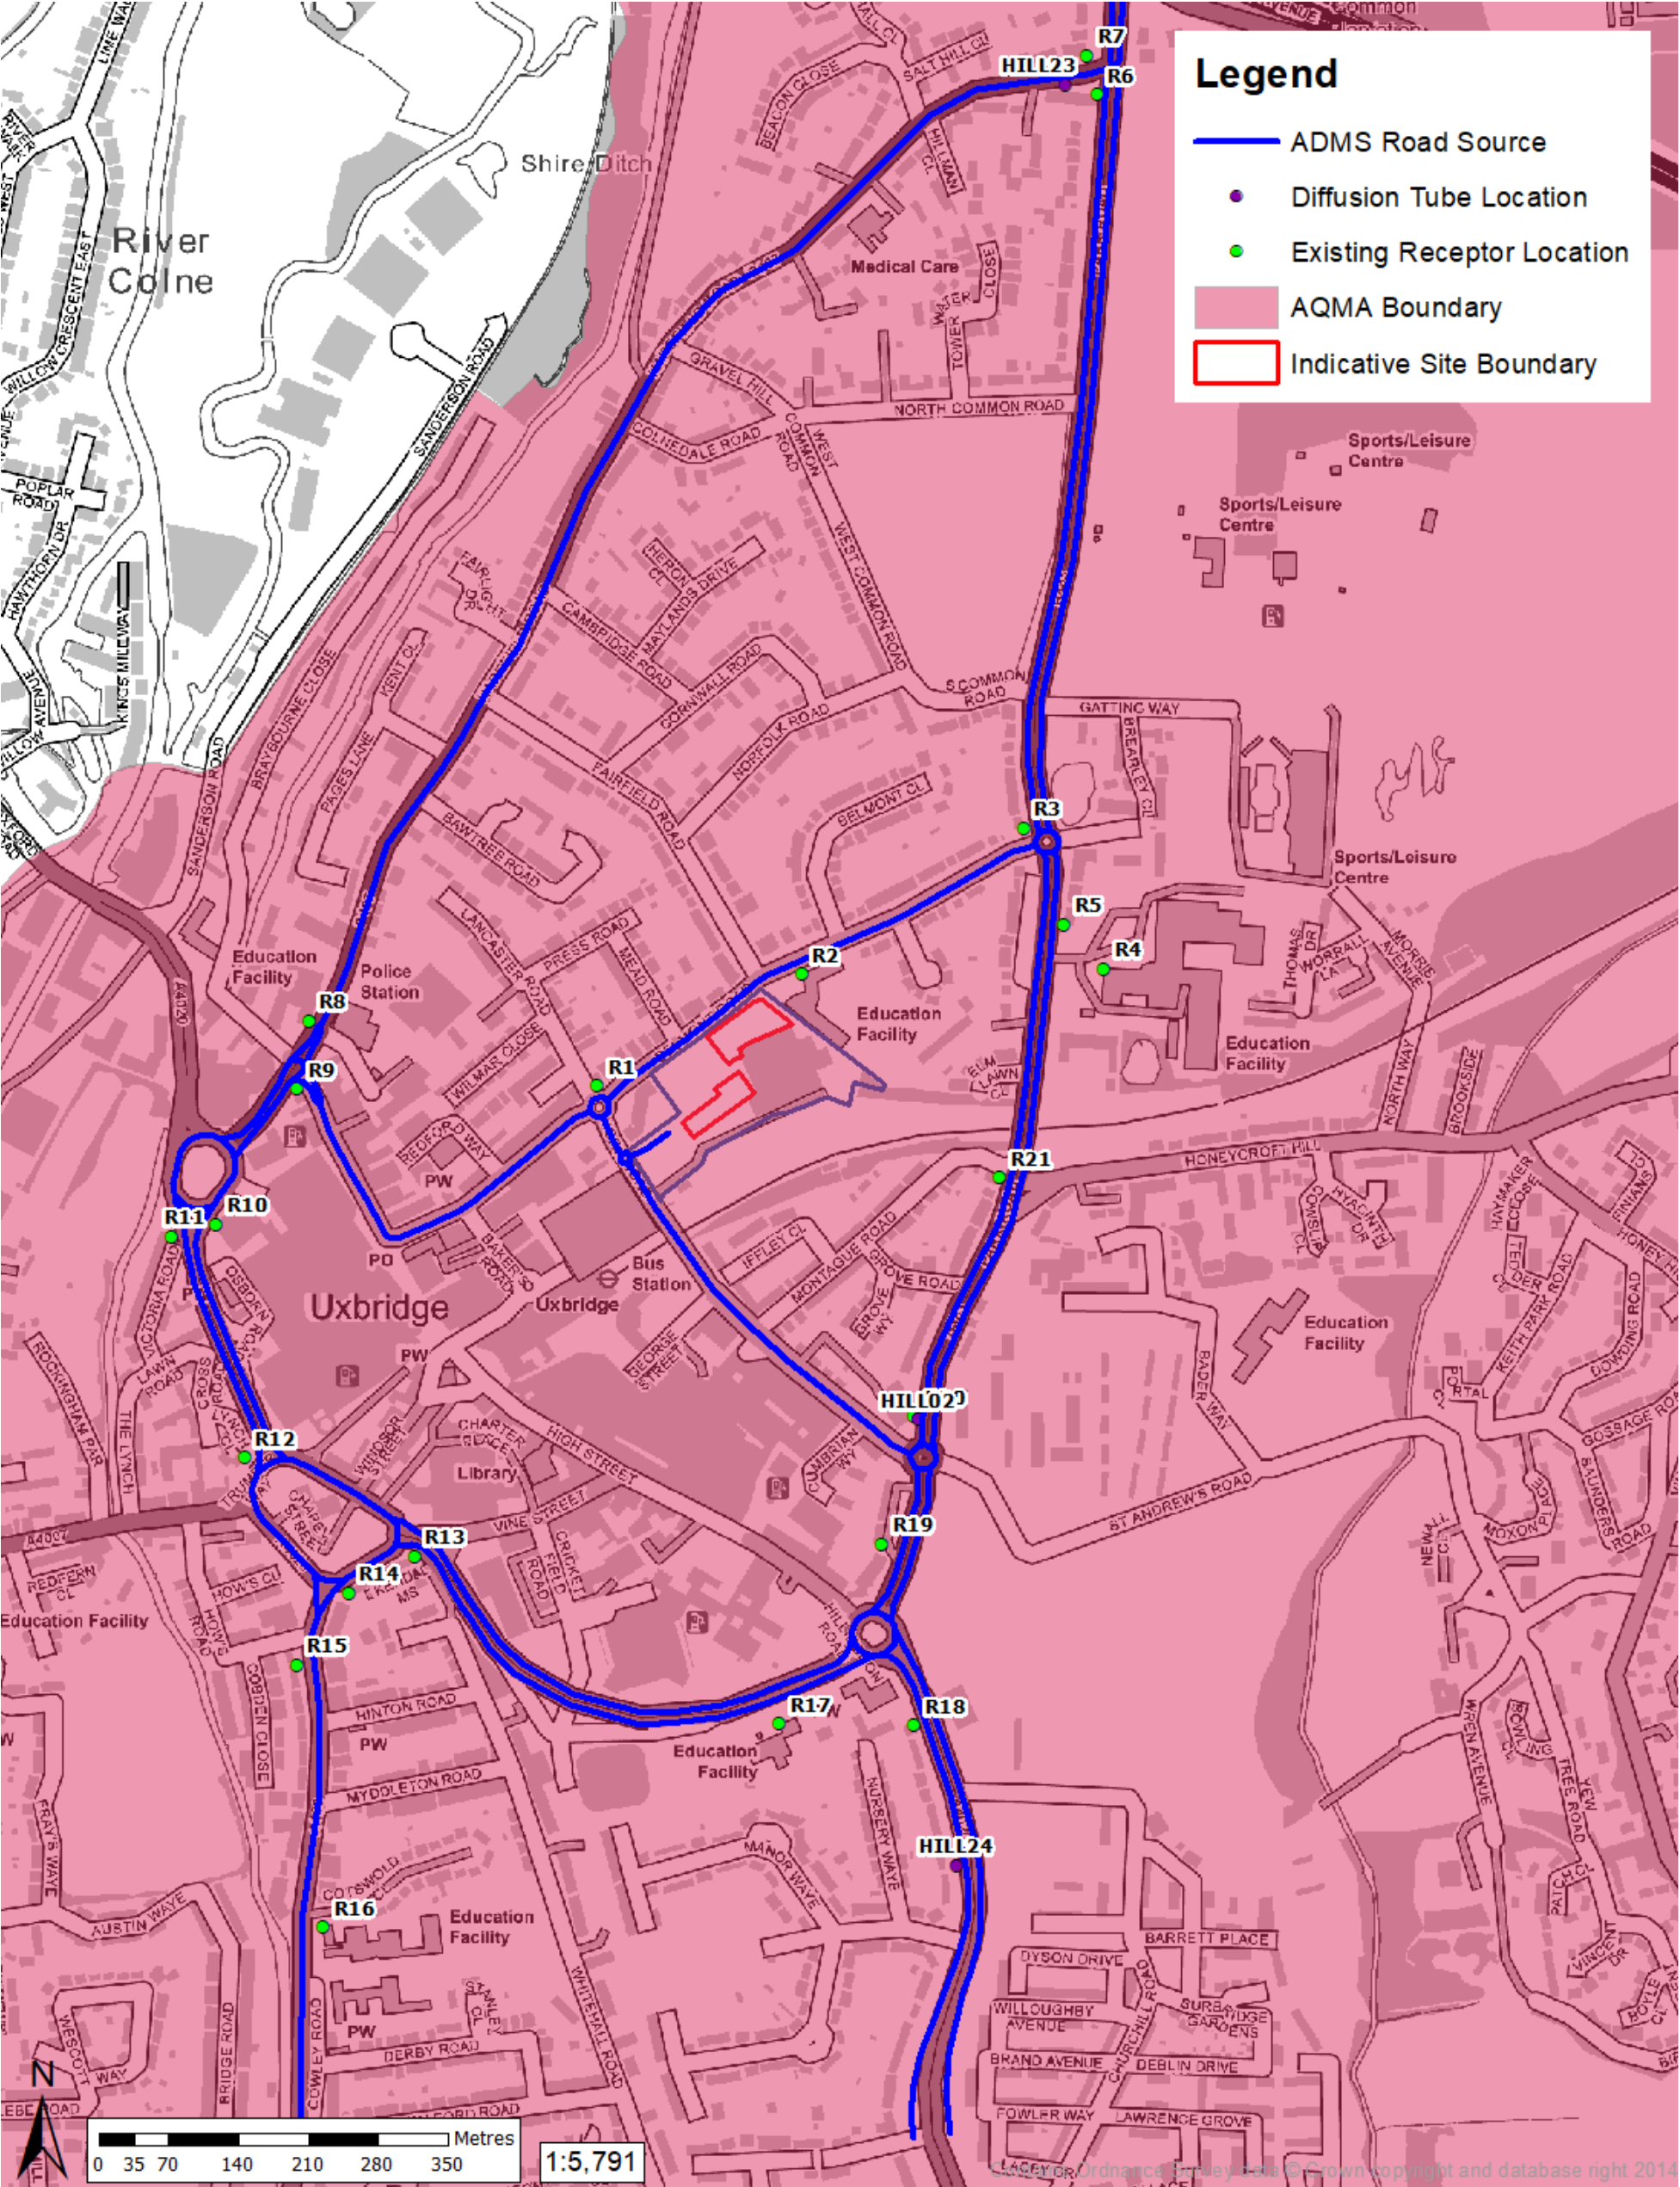

APPENDIX B - CONSTRUCTION PHASE ASSESSMENT METHODOLOGY

The following information sets out the adopted approach to the construction phase impact assessment in accordance with the aforementioned IAQM guidance¹.

Step 1 – Screen the Requirement for a more Detailed Assessment

An assessment is required if there are sensitive receptors within 350m of the site boundary, within 50m of the route(s) used by construction vehicles on the surrounding road network, or within 500m from the site entrance. A detailed assessment is also required if there is an ecological receptor within 50m of the site boundary.

Step 2A – Define the Potential Dust Emission Magnitude

Demolition

The dust emission magnitude for the demolition phase has been determined based on the below criteria:

- *Large:* Total building volume >50 000m³, potentially dusty construction (e.g. concrete), on-site crushing and screening, demolition activities >20m above ground level;
- *Medium:* Total building volume 20 000m³ – 50 000m³, potentially dusty construction material, demolition activities 10-20m above ground level; and,
- *Small:* Total building volume <20 000m³, construction material with low potential for dust release (e.g. metal cladding or timber), demolition activities <10m above ground, demolition during wetter months.

Earthworks

The dust emission magnitude for the planned earthworks has been determined based on the below criteria:

- *Large:* Total site area >10 000m², potentially dusty soil type (e.g. clay, which will be prone to suspension when dry due to small particle size), > 10 heavy earth moving vehicles active at any one time, formation of bunds >8m in height, total material moved >100 000 tonnes;
- *Medium:* Total site area 2 500m² – 10 000m², moderately dusty soil type (e.g. silt), 5-10 heavy earth moving vehicles active at any one time, formation of bunds 4m-8m in height, total material moved 20 000 tonnes – 100 000 tonnes; and
- *Small:* Total site area <2 500 m², soil type with large grain size (e.g. sand), <5 heavy earth moving vehicles active at any one time, formation of bunds <4 m in height, total material moved <10 000 tonnes, earthworks during wetter months.

Construction

The dust emission magnitude for the construction phase has been determined based on the below criteria:

- *Large:* Total building volume >100 000m³, on site concrete batching; sandblasting
- *Medium:* Total building volume 25 000m³ – 100 000m³, potentially dusty construction material (e.g. concrete), on site concrete batching; and,
- *Small:* Total building volume <25 000m³, construction material with low potential for dust release (e.g. metal cladding or timber).

Trackout

The dust emission magnitude for trackout has been determined based on the below criteria:

- *Large:* >50 HGV (>3.5t) outward movements in any one day, potentially dusty surface material (e.g. high clay content), unpaved road length >100m;
- *Medium:* 10-50 HGV (>3.5t) outward movements in any one day, moderately dusty surface material (e.g. high clay content), unpaved road length 50m – 100m; and,
- *Small:* <10 HGV (>3.5t) outward movements in any one day, surface material with low potential for dust release, unpaved road length <50m.

Step 2B - Defining the Sensitivity of the Area

Sensitivities of People to Dust Soiling Effects

- *High:*
 - * Users can reasonably expect an enjoyment of a high level of amenity;
 - * The appearance, aesthetics or value of their property would be diminished by soiling; and the people or property would reasonably expect to be present continuously, or at least regularly for extended periods, as part of the normal pattern of use of the land; and,
 - * Indicative examples include dwellings, museums and other culturally important collections, medium- and long-term car parks

¹ Institute of Air Quality Management 2014. *Guidance on the Assessment of dust from demolition and construction*.

and car showrooms.

- **Medium:**
 - * Users can reasonably expect to enjoy a reasonable level of amenity, but would not reasonably expect to enjoy the same level of amenity as in their home;
 - * The appearance, aesthetics or value of their property could be diminished by soiling;
 - * The people or property wouldn't reasonably be expected to be present here continuously or regularly for extended periods as part of the normal pattern of use of the land; and,
 - * Indicative examples include parks and places of work.
- **Low:**
 - * The enjoyment of amenity would not reasonably be expected;
 - * Property would not reasonably be expected to be diminished in appearance, aesthetics or value by soiling;
 - * There is transient exposure, where the people or property would reasonably be expected to be present only for limited periods of time as part of the normal pattern of use of the land; and,
 - * Indicative examples include playing fields, farmland (unless commercially sensitive horticultural), footpaths, short term car parks and roads.

The sensitivity of the area should be derived for each of the four activities: demolition, construction, earthworks and trackout, using the following table:

Table B-1. Sensitivity of the Area to Dust Soiling Effects on People and Property

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)			
		<20	<50	<100	<350
High	>100	High	High	Medium	Low
	10-100	High	Medium	Low	Low
	1-10	Medium	Low	Low	Low
Medium	>1	Medium	Low	Low	Low
Low	>1	Low	Low	Low	Low

Note - The likely routes the construction traffic will use should also be included to enable the presence of trackout receptors to be included in the assessment. As a general guidance, without site-specific mitigation, trackout may occur along the public highway up to 500 m from large sites (as defined in step 2A), 200 m from medium sites and 50 m from small sites, as measured from the site exit.

Sensitivities of People to the Health Effects of PM₁₀

- **High:**
 - * Locations where members of the public are exposed over a time period relevant to the air quality objective for PM₁₀ (in the case of the 24-hour objectives, a relevant location would be one where individuals may be exposed for eight hours or more in a day);
 - * Indicative examples include residential properties. Hospitals, schools and residential care homes should also be considered as having equal sensitivity to residential areas for the purposes of this assessment.
- **Medium:**
 - * Locations where the people exposed are workers, and exposure is over a time period relevant to the air quality objective for PM₁₀ (in the case of the 24-hour objectives, a relevant location would be one where individuals may be exposed for eight hours or more in a day); and,
 - * Indicative examples include office and shop workers, but will generally not include workers occupationally exposed to PM₁₀, as protection is covered by Health and Safety at Work legislation.
- **Low:**
 - * Locations where human exposure is transient; and,
 - * Indicative examples include public footpaths, playing fields, parks and shopping streets.

The sensitivity of the area should be derived for each of the four activities: demolition, construction, earthworks and trackout, using the following table:

Table B-2. Sensitivity of the Area to Human Health Impacts

Receptor Sensitivity	Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from the Source (m)				
			<20	<50	<100	<200	<350
High	>32 µg/m ³	>100	High	High	High	Medium	Low
		10-100	High	High	Medium	Low	Low
		1-10	High	Medium	Low	Low	Low
	28 - 32 µg/m ³	>100	High	High	Medium	Low	Low
		10-100	High	Medium	Low	Low	Low
		1-10	High	Medium	Low	Low	Low
	24 – 28 µg/m ³	>100	High	Medium	Low	Low	Low
		10-100	High	Medium	Low	Low	Low
		1-10	Medium	Low	Low	Low	Low
	<24 µg/m ³	>100	Medium	Low	Low	Low	Low
		10-100	Low	Low	Low	Low	Low
		1-10	Low	Low	Low	Low	Low
Medium	-	>10	High	Medium	Low	Low	Low
	-	1-10	Medium	Low	Low	Low	Low
Low	-	>1	Low	Low	Low	Low	Low

Note - The likely routes the construction traffic will use should also be included to enable the presence of trackout receptors to be included in the assessment. As a general guidance, without site-specific mitigation, trackout may occur along the public highway up to 500 m from large sites (as defined in step 2A), 200 m from medium sites and 50 m from small sites, as measured from the site exit.

Sensitivities of Receptors to Ecological Effects

- *High:*
 - * Locations with an international or national designation and the designated features may be affected by dust soiling;
 - * Locations where there is a community of a particularly dust sensitive species such as vascular species included in the Red Data List for Great Britain; and,
 - * Indicative examples include a Special Area of Conservation (SAC) designated for acid heathlands or a local site designated for lichens adjacent to the demolition of a large site containing concrete (alkali) buildings.
- *Medium:*
 - * Locations where there is a particularly important plant species, where its dust sensitivity is uncertain or unknown;
 - * Locations with a national designation where the features may be affected by dust deposition; and,
 - * Indicative example is a Site of Special Scientific Interest (SSSI) with dust sensitive features.
- *Low:*
 - * Locations with a local designation where the features may be affected by dust deposition; and,
 - * Indicative example is a local Nature Reserve with dust sensitive features.

The sensitivity of the area should be derived for each of the four activities: demolition, construction, earthworks and trackout, using the following table:

Table B-3. Sensitivity of the Area to Ecological Impacts

Receptor Sensitivity	Distance from Source (m)	
	<20	<50
High	High	Medium
Medium	Medium	Low
Low	Low	Low

Note - The likely routes the construction traffic will use should also be included to enable the presence of trackout receptors to be included in the assessment. As a general guidance, without site-specific mitigation, trackout may occur along the public highway up to 500 m from large sites (as defined in step 2A), 200 m from medium sites and 50 m from small sites, as measured from the site exit.

Step 2C - Defining the Risk of Impacts

The risk of impacts with no mitigation is determined by combining the dust emission magnitude determined in Step 2A and the sensitivity of the area determined in Step 2B.

The following tables provide a method of assigning the level of risk for each activity.

*Demolition***Table B-4.** Risk of Dust Impacts, Demolition

Sensitivity of Area	Dust Emission Magnitude		
	Large	Medium	Small
High	High Risk	Medium Risk	Medium Risk
Medium	High Risk	Medium Risk	Low Risk
Low	Medium Risk	Low Risk	Negligible

*Earthworks***Table B-5.** Risk of Dust Impacts, Earthworks

Sensitivity of Area	Dust Emission Magnitude		
	Large	Medium	Small
High	High Risk	Medium Risk	Low Risk
Medium	Medium Risk	Medium Risk	Low Risk
Low	Low Risk	Low Risk	Negligible

*Construction***Table B-6.** Risk of Dust Impacts, Construction

Sensitivity of Area	Dust Emission Magnitude		
	Large	Medium	Small
High	High Risk	Medium Risk	Low Risk
Medium	Medium Risk	Medium Risk	Low Risk
Low	Low Risk	Low Risk	Negligible

*Trackout***Table B-7.** Risk of Dust Impacts, Trackout

Sensitivity of Area	Dust Emission Magnitude		
	Large	Medium	Small
High	High Risk	Medium Risk	Low Risk
Medium	Medium Risk	Low Risk	Negligible
Low	Low Risk	Low Risk	Negligible

Step 3 – Site Specific Mitigation

The dust risk categories for each of the four activities determined in Step 2C should be used to define the appropriate, site-specific mitigation measures to be adopted.

These mitigation measures are contained within section 8.2 of the IAQM Guidance on the Assessment of Dust from Demolition and Construction.

APPENDIX C - THEORETICAL SCENARIO (NO REDUCTION IN UK FLEET EMISSIONS OVER TIME) RESULTS

Scenario Context

This additional theoretical scenario uses emission factors for 2019 for the 'do minimum' and 'do something' based on a recent appeal decision (planning reference no.APP/D3830/A/14/22269877) that favoured the uncertainty of emissions forecasts. It should be noted that this is a theoretical scenario which assumes that the government (Defra) predictions for reductions in emissions over the forthcoming years will not occur. This should not be considered as a 'more correct' scenario in accordance with the 2010 note

[<http://laqm.defra.gov.uk/laqm-faqs/faq5.html>] which confirms that: 'There is no evidence to suggest that background concentrations associated with the other (non-traffic) source contributions should not behave as forecast. This disparity in the historical data highlights the uncertainty of future year projections of both NO_x and NO₂, but at this stage there is no robust evidence upon which to base any revised road traffic emissions projections'.

The two assessment scenarios are defined below:

- 2022 'Do Minimum' Theoretical Scenario = Baseline Conditions + Committed Development Flows (using 2019 traffic emission factors); and,
- 2022 'Do Something' Theoretical Scenario = Baseline Conditions + Committed Development Flows + Proposed Development Flows (using 2019 traffic emission factors).

Nitrogen Dioxide

Table C-1 presents a summary of the predicted long term NO₂ concentrations at relevant proposed receptor locations based on the modelled 2022 'Do Minimum' and 'Do Something' scenarios.

Table C-1. Predicted Annual Average Concentrations of NO₂ at Receptor Locations

Receptor		NO ₂ (µg/m ³)			
		2019 Baseline	2022 Do Minimum	2022 Do Something	Development Contribution
R1	67 Belmont Road	26.58	26.66	26.67	0.01
R2	Hermitage Primary School	25.82	25.89	25.89	<0.01
R3	201 Park Road	31.19	31.50	31.51	0.01
R4	Uxbridge College	22.99	23.09	23.09	<0.01
R5	114 Park Road	29.09	29.35	29.35	<0.01
R6	249 Park Road	34.11	34.41	34.42	0.01
R7	247 Harefield Road	29.50	29.69	29.69	<0.01
R8	Laburnum Court 9 Harefield Road	27.57	27.68	27.69	0.01
R9	The Cedars 66 High Street	32.53	32.78	32.78	<0.01
R10	Cave House Osborn Road	34.82	35.13	35.13	<0.01
R11	10 Frays Court Victoria Road	32.79	33.05	33.05	<0.01
R12	3 Lynch Close	33.64	33.92	33.93	0.01
R13	5 Cochrane House Cowley Road	40.15	40.58	40.59	0.01
R14	27 Cochrane House Crowley Road	39.04	39.44	39.44	<0.01
R15	51 Cobden Close	28.82	28.96	28.96	<0.01

R16	Whitehall Nursery & Infants Sc	27.90	28.02	28.02	<0.01
R17	St Andrews CofE Primary School	29.92	30.09	30.10	0.01
R18	75 Hillingdon Road	34.24	34.52	34.53	0.01
R19	11 Park Court Park Road	31.44	31.66	31.66	<0.01
R20	Uxbridge Day Nursery Park Road	35.88	36.21	36.22	0.01
R21	119 Park Road	29.45	29.72	29.72	<0.01
Annual Mean AQO		40 µg/m ³			

As indicated in **Table C-1**, the maximum predicted increase in annual average exposure to NO₂ at any existing receptor, due to changes in traffic movements associated with the proposed development is 0.01 µg/m³ at any modelled sensitive receptor.

The predicted long-term NO₂ concentrations at all existing receptors are below 60 µg/m³ in all scenarios. Therefore, it is unlikely there will be any exceedances for the short-term NO₂ AQO at all modelled receptors as outlined in LAQM TG16 technical guidance.

The impact description of changes in traffic flow associated with the proposed development with respect to annual mean NO₂ exposure has been assessed with reference to the criteria in Section 3. The outcomes of the assessment are summarised in **Table C-2**.

Table C-2. Impact Description of Effects at Key Receptors (NO₂)

Impact Description of NO ₂ Effects at Key Receptors					
Receptor	Change Due to Development (DS-DM) (µg/m ³)	Change due to Development (% of AQO)	% Change in Concentration Relative to AQO	% Annual Mean Concentration in Assessment Year	Impact Description
R1	0.01	0.03	0%	≤75% of AQO	Negligible
R2	<0.01	0.00	0%	≤75% of AQO	Negligible
R3	0.01	0.03	0%	76-94% of AQO	Negligible
R4	<0.01	0.00	0%	≤75% of AQO	Negligible
R5	<0.01	0.00	0%	≤75% of AQO	Negligible
R6	0.01	0.03	0%	76-94% of AQO	Negligible
R7	<0.01	0.00	0%	≤75% of AQO	Negligible
R8	0.01	0.03	0%	≤75% of AQO	Negligible
R9	<0.01	0.00	0%	76-94% of AQO	Negligible
R10	<0.01	0.00	0%	76-94% of AQO	Negligible
R11	<0.01	0.00	0%	76-94% of AQO	Negligible
R12	0.01	0.03	0%	76-94% of AQO	Negligible
R13	0.01	0.03	0%	95-102% of AQO	Negligible
R14	<0.01	0.00	0%	95-102% of AQO	Negligible
R15	<0.01	0.00	0%	≤75% of AQO	Negligible
R16	<0.01	0.00	0%	≤75% of AQO	Negligible
R17	0.01	0.03	0%	≤75% of AQO	Negligible
R18	0.01	0.03	0%	76-94% of AQO	Negligible
R19	<0.01	0.00	0%	76-94% of AQO	Negligible
R20	0.01	0.03	0%	76-94% of AQO	Negligible
R21	<0.01	0.00	0%	≤75% of AQO	Negligible

+0% means a change of <0.5% as per explanatory note 2 of table 6.3 of the EPUK IAQM Guidance.

The impact description of the effects of changes in traffic flow as a result of the proposed development, with respect to NO₂ exposure for existing receptors, is determined to be 'negligible' at all modelled receptors. This

is based on the methodology outlined in section 3. Given the quantitative nature of the assessment and the verification of the air quality dispersion model, the level of accuracy of the assessment results is considered to be 'high'.

Particulate Matter (PM₁₀)

Table C-3 presents a summary of the predicted change in annual mean PM₁₀ concentrations at relevant receptor locations, due to changes in traffic flow associated with the proposed development, based on modelled 'Do Minimum' and 'Do Something' scenarios.

Table C-3. Predicted Annual Average Concentrations of PM₁₀ at Receptor Locations

Receptor		PM ₁₀ (µg/m ³)			
		2019 Baseline	2022 Do Minimum	2022 Do Something	Development Contribution
R1	67 Belmont Road	17.10	17.11	17.11	<0.01
R2	Hermitage Primary School	17.04	17.05	17.05	<0.01
R3	201 Park Road	17.51	17.57	17.57	<0.01
R4	Uxbridge College	16.28	16.30	16.30	<0.01
R5	114 Park Road	17.56	17.61	17.61	<0.01
R6	249 Park Road	18.88	18.93	18.93	<0.01
R7	247 Harefield Road	18.09	18.12	18.12	<0.01
R8	Laburnum Court 9 Harefield Road	17.29	17.31	17.31	<0.01
R9	The Cedars 66 High Street	18.09	18.13	18.14	0.01
R10	Cave House Osborn Road	18.45	18.50	18.50	<0.01
R11	10 Frays Court Victoria Road	18.11	18.15	18.15	<0.01
R12	3 Lynch Close	18.24	18.29	18.29	<0.01
R13	5 Cochrane House Cowley Road	19.86	19.94	19.94	<0.01
R14	27 Cochrane House Crowley Road	19.66	19.73	19.73	<0.01
R15	51 Cobden Close	18.10	18.12	18.12	<0.01
R16	Whitehall Nursery & Infants Sc	18.01	18.03	18.03	<0.01
R17	St Andrews CofE Primary School	18.41	18.45	18.45	<0.01
R18	75 Hillingdon Road	19.27	19.33	19.33	<0.01
R19	11 Park Court Park Road	18.53	18.57	18.57	<0.01
R20	Uxbridge Day Nursery Park Road	18.68	18.74	18.75	0.01
R21	119 Park Road	17.25	17.29	17.29	<0.01
Annual Mean AQO		40 µg/m ³			

All modelled existing receptors are predicted to be below the AQO for PM₁₀ in both the 'Do Minimum' and 'Do Something' scenarios.

As indicated in **Table C-3**, the maximum predicted increase in annual average exposure to PM₁₀ at any existing receptor, due to changes in traffic movements associated with the proposed development is 0.01 µg/m³ at any modelled sensitive receptor.

The impact description of changes in traffic flow associated with the proposed development with respect to annual mean PM₁₀ exposure has been assessed with reference to the criteria in Section 3. The outcomes of the assessment are summarised in **Table C-4**.

Table C-4. Impact Description of Effects at Key Receptors (PM₁₀)

Impact Description of PM ₁₀ Effects at Key Receptors					
Receptor	Change Due to Development (DS-DM) (µg/m ³)	Change due to Development (% of AQO)	% Change in Concentration Relative to AQO	% Annual Mean Concentration in Assessment Year	Impact Description
R1	<0.01	0.00	0%	≤75% of AQO	Negligible
R2	<0.01	0.00	0%	≤75% of AQO	Negligible
R3	<0.01	0.00	0%	≤75% of AQO	Negligible
R4	<0.01	0.00	0%	≤75% of AQO	Negligible
R5	<0.01	0.00	0%	≤75% of AQO	Negligible
R6	<0.01	0.00	0%	≤75% of AQO	Negligible
R7	<0.01	0.00	0%	≤75% of AQO	Negligible
R8	<0.01	0.00	0%	≤75% of AQO	Negligible
R9	0.01	0.00	0%	≤75% of AQO	Negligible
R10	<0.01	0.00	0%	≤75% of AQO	Negligible
R11	<0.01	0.00	0%	≤75% of AQO	Negligible
R12	<0.01	0.00	0%	≤75% of AQO	Negligible
R13	<0.01	0.00	0%	≤75% of AQO	Negligible
R14	<0.01	0.00	0%	≤75% of AQO	Negligible
R15	<0.01	0.00	0%	≤75% of AQO	Negligible
R16	<0.01	0.00	0%	≤75% of AQO	Negligible
R17	<0.01	0.00	0%	≤75% of AQO	Negligible
R18	<0.01	0.00	0%	≤75% of AQO	Negligible
R19	<0.01	0.00	0%	≤75% of AQO	Negligible
R20	0.01	0.00	0%	≤75% of AQO	Negligible
R21	<0.01	0.00	0%	≤75% of AQO	Negligible

+0% means a change of <0.5% as per explanatory note 2 of table 6.3 of the EPUK IAQM Guidance.

The impact description of the effects of changes in traffic as a result of the proposed development, with respect to annual mean PM₁₀ exposure for existing receptors is determined to be 'negligible' based on the methodology outlined in section 3. Given the quantitative nature of the assessment and the verification of the air quality dispersion model, the level of accuracy of the assessment results is considered to be 'high'.

Particulate Matter (PM_{2.5})

Table C-5 presents a summary of the predicted change in annual mean PM_{2.5} concentrations at relevant receptor locations, due to changes in traffic flow associated with the proposed development, based on modelled 'Do Minimum' and 'Do Something' scenarios.

Table C-5. Predicted Annual Average Concentrations of PM_{2.5} at Receptor Locations

Receptor		PM _{2.5} (µg/m ³)			
		2019 Baseline	2022 Do Minimum	2022 Do Something	Development Contribution
R1	67 Belmont Road	11.65	11.66	11.66	<0.01
R2	Hermitage Primary School	11.61	11.62	11.62	<0.01
R3	201 Park Road	11.86	11.89	11.89	<0.01
R4	Uxbridge College	11.09	11.10	11.10	<0.01
R5	114 Park Road	11.86	11.89	11.89	<0.01
R6	249 Park Road	12.55	12.59	12.59	<0.01

R7	247 Harefield Road	12.07	12.09	12.09	<0.01
R8	Laburnum Court 9 Harefield Road	11.77	11.78	11.78	<0.01
R9	The Cedars 66 High Street	12.27	12.29	12.29	<0.01
R10	Cave House Osborn Road	12.49	12.52	12.52	<0.01
R11	10 Frays Court Victoria Road	12.28	12.30	12.30	<0.01
R12	3 Lynch Close	12.36	12.39	12.39	<0.01
R13	5 Cochrane House Cowley Road	13.30	13.34	13.34	<0.01
R14	27 Cochrane House Crowley Road	13.17	13.21	13.21	<0.01
R15	51 Cobden Close	12.19	12.21	12.21	<0.01
R16	Whitehall Nursery & Infants Sc	12.13	12.14	12.14	<0.01
R17	St Andrews CofE Primary School	12.37	12.40	12.40	<0.01
R18	75 Hillingdon Road	12.90	12.93	12.93	<0.01
R19	11 Park Court Park Road	12.46	12.48	12.48	<0.01
R20	Uxbridge Day Nursery Park Road	12.63	12.66	12.67	0.01
R21	119 Park Road	11.69	11.72	11.72	<0.01
Annual Mean AQO		25 µg/m ³			

All modelled existing receptors are predicted to be below the AQO for PM_{2.5} in both the 'Do Minimum' and 'Do Something' scenarios.

As indicated in **Table C-5**, the maximum predicted increase in annual average exposure to PM_{2.5} at any existing receptor, due to changes in traffic movements associated with the proposed development is 0.01 µg/m³ at any modelled sensitive receptor.

The impact description of changes in traffic flow associated with the proposed development with respect to annual mean PM_{2.5} exposure has been assessed with reference to the criteria in Section 3. The outcomes of the assessment are summarised in **Table C-6**.

Table C-6. Impact Description of Effects at Key Receptors (PM_{2.5})

Impact Description of PM _{2.5} Effects at Key Receptors					
Receptor	Change Due to Development (DS-DM) (µg/m ³)	Change due to Development (% of AQO)	% Change in Concentration Relative to AQO	% Annual Mean Concentration in Assessment Year	Impact Description
R1	<0.01	0.00	0%	≤75% of AQO	Negligible
R2	<0.01	0.00	0%	≤75% of AQO	Negligible
R3	<0.01	0.00	0%	≤75% of AQO	Negligible
R4	<0.01	0.00	0%	≤75% of AQO	Negligible
R5	<0.01	0.00	0%	≤75% of AQO	Negligible
R6	<0.01	0.00	0%	≤75% of AQO	Negligible
R7	<0.01	0.00	0%	≤75% of AQO	Negligible
R8	<0.01	0.00	0%	≤75% of AQO	Negligible
R9	<0.01	0.00	0%	≤75% of AQO	Negligible
R10	<0.01	0.00	0%	≤75% of AQO	Negligible
R11	<0.01	0.00	0%	≤75% of AQO	Negligible
R12	<0.01	0.00	0%	≤75% of AQO	Negligible
R13	<0.01	0.00	0%	≤75% of AQO	Negligible
R14	<0.01	0.00	0%	≤75% of AQO	Negligible
R15	<0.01	0.00	0%	≤75% of AQO	Negligible
R16	<0.01	0.00	0%	≤75% of AQO	Negligible

R17	<0.01	0.00	0%	≤75% of AQO	Negligible
R18	<0.01	0.00	0%	≤75% of AQO	Negligible
R19	<0.01	0.00	0%	≤75% of AQO	Negligible
R20	0.01	0.00	0%	≤75% of AQO	Negligible
R21	<0.01	0.00	0%	≤75% of AQO	Negligible

+0% means a change of <0.5% as per explanatory note 2 of table 6.3 of the EPUK IAQM Guidance.

The impact description of the effects of changes in traffic as a result of the proposed development, with respect to annual mean PM₁₀ exposure for existing receptors is determined to be 'negligible' based on the methodology outlined in Section 3. Given the quantitative nature of the assessment and the verification of the air quality dispersion model, the level of accuracy of the assessment results is considered to be 'high'.

APPENDIX D - REPORT TERMS & CONDITIONS

This Report has been prepared using reasonable skill and care for the sole benefit of Sainsbury's Supermarkets Limited ("the Client") for the proposed uses stated in the report by [Tetra Tech Limited] ("Tetra Tech"). Tetra Tech exclude all liability for any other uses and to any other party. The report must not be relied on or reproduced in whole or in part by any other party without the copyright holder's permission.

No liability is accepted, or warranty given for; unconfirmed data, third party documents and information supplied to Tetra Tech or for the performance, reliability, standing etc. of any products, services, organisations or companies referred to in this report. Tetra Tech does not purport to provide specialist legal, tax or accounting advice.

The report refers, within the limitations stated, to the environment of the site in the context of the surrounding area at the time of the inspections. Environmental conditions can vary, and no warranty is given as to the possibility of changes in the environment of the site and surrounding area at differing times. No investigative method can eliminate the possibility of obtaining partially imprecise, incomplete or not fully representative information. Any monitoring or survey work undertaken as part of the commission will have been subject to limitations, including for example timescale, seasonal and weather-related conditions. Actual environmental conditions are typically more complex and variable than the investigative, predictive and modelling approaches indicate in practice, and the output of such approaches cannot be relied upon as a comprehensive or accurate indicator of future conditions. The "shelf life" of the Report will be determined by a number of factors including; its original purpose, the Client's instructions, passage of time, advances in technology and techniques, changes in legislation etc. and therefore may require future re-assessment.

The whole of the report must be read as other sections of the report may contain information which puts into context the findings in any executive summary.

The performance of environmental protection measures and of buildings and other structures in relation to acoustics, vibration, noise mitigation and other environmental issues is influenced to a large extent by the degree to which the relevant environmental considerations are incorporated into the final design and specifications and the quality of workmanship and compliance with the specifications on site during construction. Tetra Tech accept no liability for issues with performance arising from such factors.