


External Door Schedule																				
Door	Type	Room Name	Door ID	Height	Width	Acoustic Rating (9dB Rw)	Acoustic Seal	Fire_Rating	Smoke Seal	Fire Sign	Glazing	Ironmongery Set Manufacturer (see note)	Ironmongery Set Code	Kickplate	Electronic Access Control	Intruder Detector (Contact Sets)	Manual Locking	Power Assisted (Wheelchair Access)	Phase Created	Comments
L00 FFL																				
L00 FFL	EX-A	Office 9p	ED-00-CA-01	2480	1560			NFR	No	No	Yes	See Spec	To Be Confirmed	No	No	No	Yes	No	New Construction	
L00 FFL	EX-B	Entrance	ED-00-CA-02	2400	1415			60	Yes	Yes	Yes	See Spec	To Be Confirmed	No	Yes	Yes	No	Yes	New Construction	Card Access
L00 FFL	EX-A	Office 6p	ED-00-CA-03	2480	1560			NFR	No	No	Yes	See Spec	To Be Confirmed	No	No	No	Yes	No	New Construction	
L00 FFL	EX-A	Office 5p	ED-00-CA-04	2480	1560			NFR	No	No	Yes	See Spec	To Be Confirmed	No	No	No	Yes	No	New Construction	
L00 FFL	EX-D	Entrance	ED-00-CA-05	2340	1125			60	Yes	Yes	Yes	See Spec	To Be Confirmed	No	Yes	Yes	No	Yes	New Construction	Card Access
L00 FFL	EX-B	Entrance	ED-00-CIR-01	2100	1810			NFR	No	Yes	Yes	See Spec	To Be Confirmed	No	Yes	Yes	No	Yes	New Construction	Card Access
L00 FFL	EX-B	Entrance	ED-00-CIR-02	2675	1700			60	Yes	Yes	Yes	See Spec	To Be Confirmed	No	Yes	Yes	No	Yes	New Construction	Card Access
L00 FFL	EX-C	General Training	ED-00-E&T-01	2075	1000			30	Yes	Yes	No	See Spec	To Be Confirmed	No	No	No	Yes	No	New Construction	
L00 FFL	EX-C	Entrance	ED-00-E&T-02	2370	900			60	Yes	Yes	No	See Spec	To Be Confirmed	No	No	No	No	Yes	New Construction	Card Access
L00 FFL	EX-E	Plant	ED-00-HAE-01	2475	1805	35	Yes	60	Yes	No	No	See Spec	To Be Confirmed	No	No	No	Yes	No	New Construction	
L00 FFL	EX-F	Plant	ED-00-HAE-02	2000	2500			NFR	No	No	No	See Spec	To Be Confirmed	No	No	No	Yes	No	New Construction	
L00 FFL	EX-G	Plant	ED-00-HAE-03	2085	1200			NFR	No	No	Yes	See Spec	To Be Confirmed	No	No	No	Yes	No	New Construction	
L00 FFL	EX-B	Entrance	ED-00-HAE-04	2531	1700			60	Yes	Yes	Yes	See Spec	To Be Confirmed	No	Yes	Yes	No	Yes	New Construction	Card Access
L01 FFL																				
L01 FFL	EX-C	Entrance	ED-01-CA-01	2370	900			60	Yes	Yes	No	See Spec	To Be Confirmed	No	No	No	Yes	No	New Construction	

Notes

- All dimensions to be checked on site
- Do not scale off this drawing
- All dimensions are shown in mm unless otherwise stated
- Refer to drawing issue sheet for purpose of issue
- If in doubt ask
- © Llewelyn Davies Weeks

Key Plan

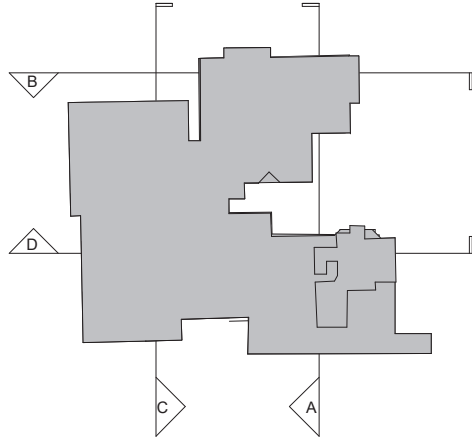

GENERAL

DRAWINGS TO BE READ IN CONJUNCTION WITH SPECIFICATION & FINISHES/ SCHEDULE OF WORKS/ MATERIALS & WORKMANSHIP/ MEP & STRUCTURAL ENGINEER'S DRAWINGS.

CONTRACTOR TO PROVIDE SAMPLES OF ALL FINISHES AND SPECIFIED COLOURS FOR REVIEW PRIOR TO THE PLACING OF ANY ORDERS

SEE GA FLOOR. PLAN SERIES 000120 FOR LOCATION OF DOORS

DIMENSIONS ROUNDED UP OR DOWN TO THE NEAREST WHOLE NUMBER. ALL DIMENSIONS TO BE CONFIRMED ON SITE

LEVELS ARE BASED ON MURPHY GEOSPATIAL SURVEY

NO WORKS TO COMMENCE ON SITE WITHOUT NOTIFICATION TO LONDON BOROUGH OF HILLINGDON AND RECEIVING A WRITTEN APPROVAL

FOR ALL ELECTRICAL INFORMATION REFER TO CPW DRAWING

DOOR MANUFACTURE TO BE CONFIRMED WITH THE TRUST.

IRONMONGERY TO BE CONFIRMED WITH ENGLISH HERITAGE
ALL DOORS CONDITIONS TO BE CHECKED.

ALL GOOD CONDITION DOORS TO BE REPAINTED AND MADE GOOD.

ALL DOORS FIRE RATING TO COMPLY WITH FIRE EINGEERS STAGE 4 REPORT.

EDUCATION AND TRAINING FIRE RATING AND ACOUSTIC RATING TO BE CONFIRMED.

Project Status

REV	DESCRIPTION	DATE	BY	CHK
P01	For Planning Amendments	28/03/22	JAK	LD

Structural Consultant
CAMPBELL REITH

Services Consultant
CPW

Cost Consultant
RIDGE AND PARTNERS

Project Title
HILLINGDON HOSPITAL - THE FURZE

Client
THE HILLINGDON HOSPITAL NHS FOUNDATION TRUST

Drawing Title
DOOR SCHEDULE

Project Number
LD20 192.00

Drawing Number
THHFP1-LDW-ZZ-SH-A-250002

Revision
- P01

Date
28/03/22

Scale @ A1
1 : 100

Architects

LLEWELYN DAVIES

Architects | Planners | Designers

The Rookery | 3rd Floor | 2 Dyott Street | London | WC1A 1DE
T +44(0)20 7907 7900 | E london@ldavies.com

www.ldavies.com