

VOLUME OF DORMER 1 = $\frac{1}{2}$ (LENGTH X HEIGHT X DEPTH)

$$= \frac{1}{2} (4.50 \times 2.38 \times 3.93)$$

$$= 21.05$$

VOLUME OF DORMER 2 = $\frac{1}{2}$ (LENGTH X HEIGHT X DEPTH)

$$= \frac{1}{2} (4.00 \times 1.24 \times 2.65)$$


$$= 6.57$$

$$\& = (\text{LENGTH} \times \text{HEIGHT} \times \text{DEPTH})$$


$$= (4.00 \times 2.05 \times 2.65)$$

$$= 21.73$$


$$\text{TOTAL} = 49.35 < 50$$

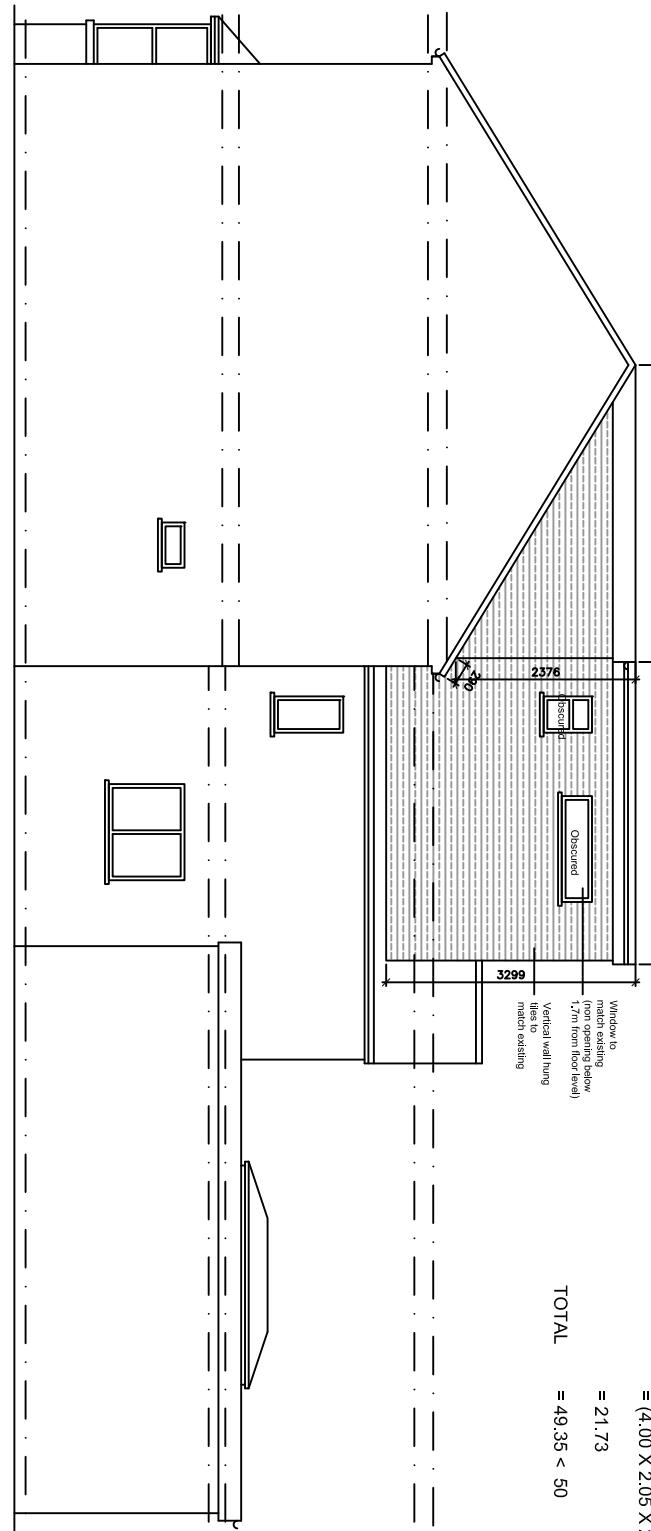

PROPOSED SIDE ELEVATION

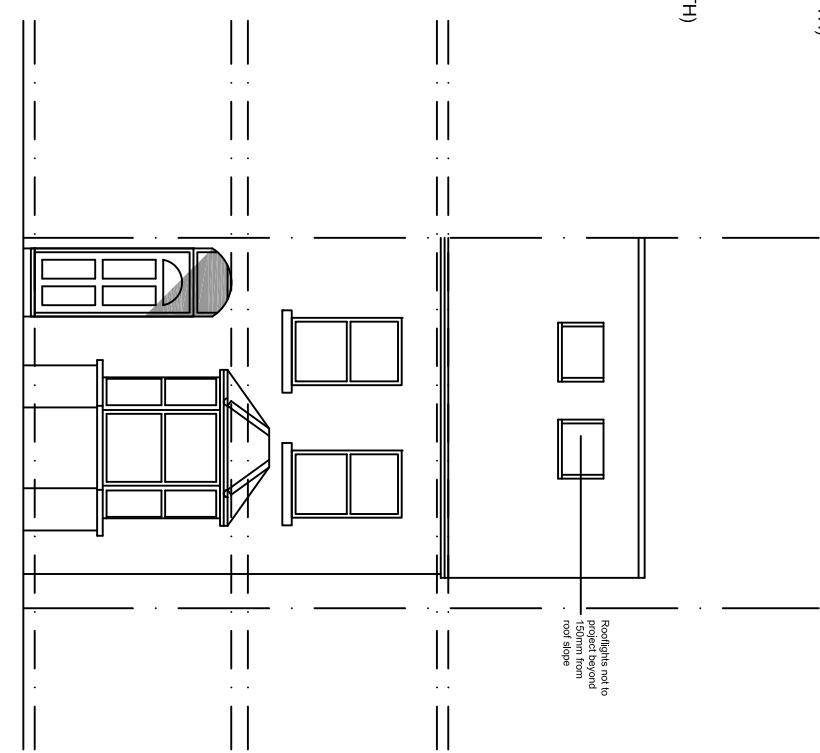

PROPOSED FRONT ELEVATION

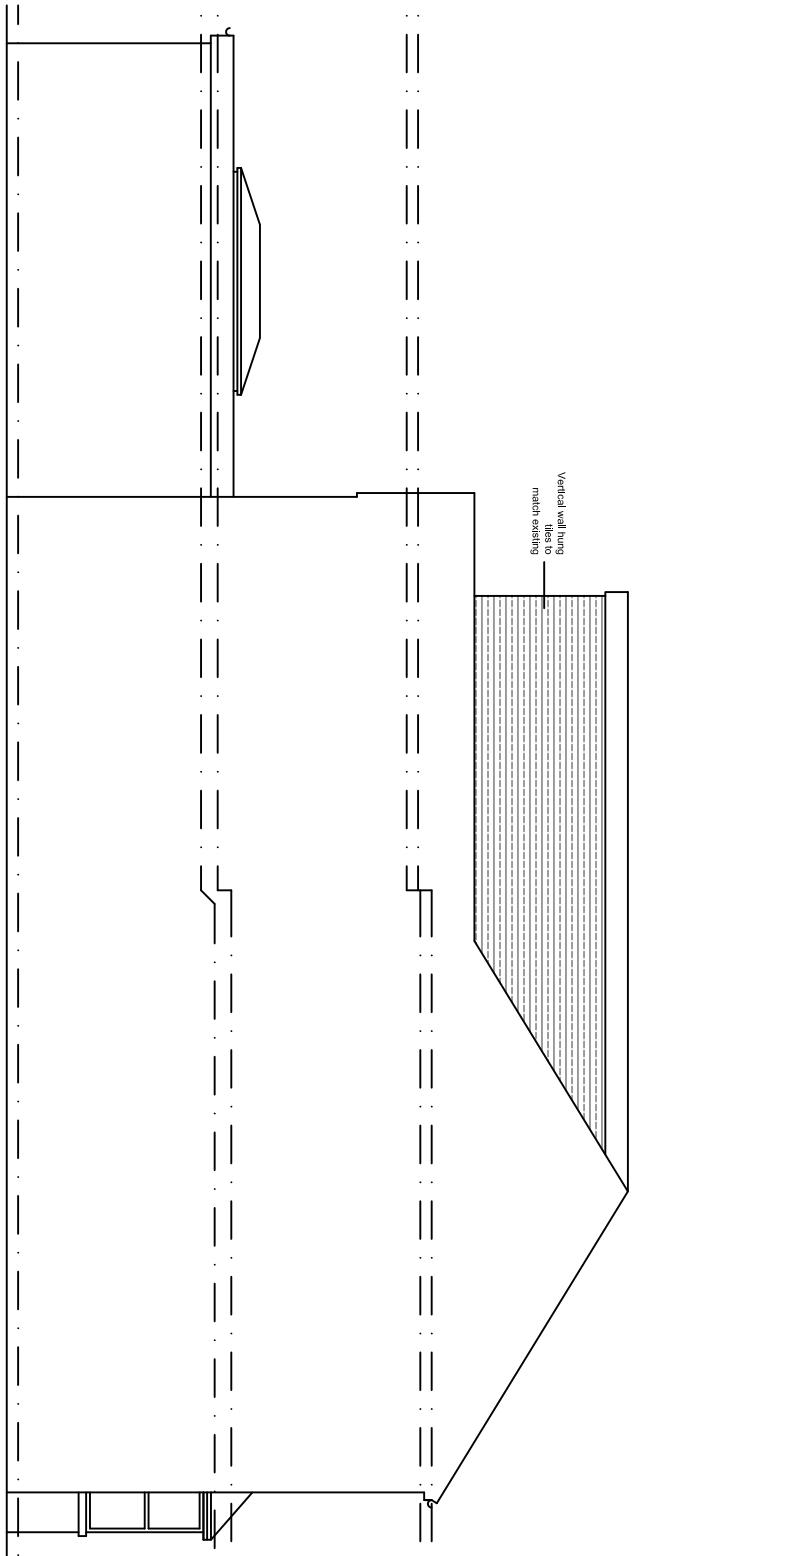

PROPOSED REAR ELEVATION

GENERAL NOTES

All dimensions, levels, sizes, positions and locations of particulars as indicated on drawings are to be verified by the appointed contractor on site prior to engaging in works.

Any discrepancies must be reported to the Designer/Engineer/Surveyor or responsible person/s immediately.

No dimension to be scaled from the drawings for construction purposes unless otherwise indicated. All work is to comply with current Building Regulations.

Party Wall etc. Act 1996 would apply and contractor is to assure that no work is commenced until this formality is completed.

The sole purpose of this drawing is the procurement of Planning Permission and Building regulation approval and work is NOT to commence before such approvals.


Where the drawing is used for the works, contractors should request at the time of tender, from the tenderer, full specification and schedule of work. To avoid any disputes, this schedule of works in conjunction with the drawings would be used to resolve matters.

Contractors to assure and satisfy himself that necessary Planning permission and Building Regulations are approved before tendering or commencement if works.

The competent person is to send to the local authority via the scheme provider a self certification certificate within 30 days of the electrical works completion. The client must receive both a copy of the self certificate and a BS7671 Electrical Installation Test Certificate (Reg.P1).

The Gas and Boiler installations will be carried out by a suitably qualified CORGI registered gas engineer or equal approved.

The contractor is responsible for ensuring compliance with the CDM Regulations and appropriate Health & Safety on site precautions.

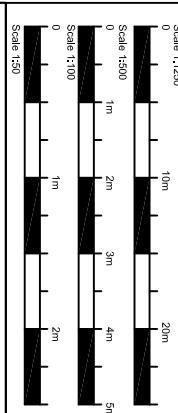

Scale 1:1250

Scale 1:500

Scale 1:100

Scale 1:50

DHIVAD
Designs
www.dhivadesigns.co.uk

DHIVAD DESIGNS LTD

REF	DESCRIPTION	QTY	UNIT
P4	LAUNDRY WINDOW	NP	17.11.2022
P3	ENSUITE WINDOW	NP	15.11.2022
P2	CLIENT AMENDS	NP	15.11.2022
P1	WINDOW	NP	14.11.2022
REVISION	REVISION	NP	NP

SITE ADDRESS
68 BRIDGE ROAD
UXBRIDGE
UB8 2QP

DRAWING TITLE
PROPOSED ELEVATIONS

DATE NOV 2022
SCALE 1:100 @ A3
DRAWING NO. DD328-005-P4

DRAWN BY NP
CHECKED BY NP
REVIEWED BY NP