


URMIII

Ease of Use




-  Creative Installation
-  Compatible PSU Box
-  Bottom Protection
-  Modular Design



FEATURES

- True single-person installation – automatic lock design, excellent safety performance
- Pinch n' go module – high efficiency of screen maintenance
- 3D corner protection – free from lamp damage
- Creative installation – 90° corner, curve and creative shapes

APPLICATIONS

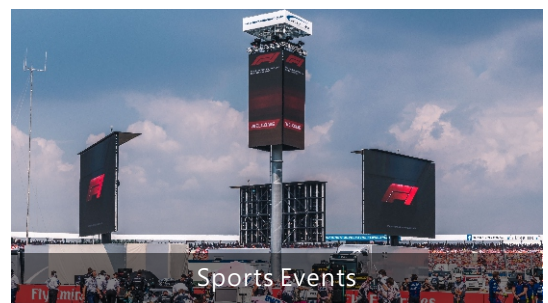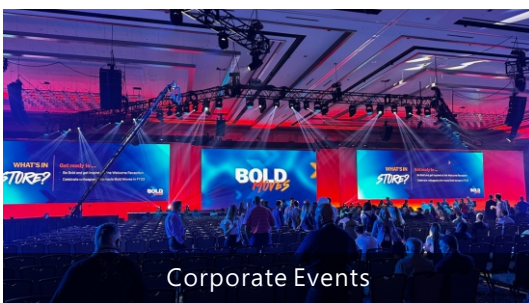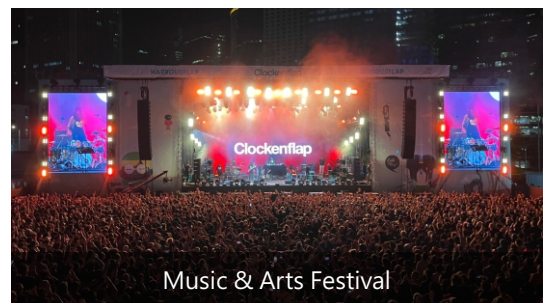

SPECIFICATIONS

Parameter	Value						
Model	URMIII 1.9	URMIII 2.6	URMIII 2	URMIII 3	URMIII 02	URMIII 03	URMIII 04
Pixel Pitch	1.9mm	2.6mm	2.9mm	3.9mm	2.9mm	3.9mm	4.8mm
Environment	Indoor	Indoor	Indoor	Indoor	Outdoor	Outdoor	Outdoor
LED Type	3-in-1 Black SMD	3-in-1 Black SMD	3-in-1 Black SMD	3-in-1 Black SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD
Brightness	800 cd/m ²	1,000 cd/m ²	800 cd/m ²	800 cd/m ²	4,000 cd/m ²	4,500 cd/m ²	4,500 cd/m ²
Pixel Density	262,144 pixels/m ²	147,456 pixels/m ²	112,896 pixels/m ²	65,536 pixels/m ²	112,896 pixels/m ²	65,536 pixels/m ²	43,264 pixels/m ²
Panel Size (W×H×D)	500 × 500 × 71mm	500 × 500 × 71mm	500 × 500/1000 × 71mm	500 × 500/1000 × 71mm	500 × 500/1000 × 71mm	500 × 500/1000 × 71mm	500 × 500/1000 × 71mm
Panel Resolution	256 × 256	192 × 192	168 × 168/336	128 × 128/256	168 × 168/336	128 × 128/256	104 × 104/208
Panel Weight	7.3 kg	7.3 kg	7.3/12.5 kg	7.3/12.5 kg	7.5/13.2 kg	7.5/13.2 kg	7.5/13.2 kg
Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Ingress Protection	IP30	IP30	IP30	IP30	IP65	IP65	IP65
Operating Temperature /Humidity	-10°C ~ 45°C/ 10% ~ 80% RH	-10°C ~ 45°C/ 10% ~ 80% RH	-10°C ~ 45°C/ 10% ~ 80% RH	-10°C ~ 45°C/ 10% ~ 80% RH	-10°C ~ 45°C/ 10% ~ 80% RH	-10°C ~ 45°C/ 10% ~ 80% RH	-10°C ~ 45°C/ 10% ~ 80% RH
Maintenance	Rear	Rear	Rear	Rear	Rear	Rear	Rear
Curve (Convex - Concave)	-10° ~ 10°	-10° ~ 10°	-10° ~ 10°	-10° ~ 10°	-10° ~ 10°	-10° ~ 10°	-10° ~ 10°
Viewing Angle (H/V)	160°/160°	160°/160°	160°/160°	160°/160°	140°/120°	140°/120°	140°/120°
Contrast Ratio	4,000:1	4,000:1	3,000:1	3,000:1	3,000:1	4,000:1	4,000:1
Input Power/Panel (Max./Ave.)	120/35 W	120/35 W	120/35 W 240/70 W	120/35 W 240/70 W	170/50 W 335/100 W	170/50 W 335/100 W	170/50 W 335/100 W
Refresh Rate	3,840 Hz	3,840 Hz	3,840 Hz	3,840 Hz	3,840 Hz	3,840 Hz	3,840 Hz
Input Voltage	100 ~ 240 VAC	100 ~ 240 VAC	100 ~ 240 VAC	100 ~ 240 VAC	100 ~ 240 VAC	100 ~ 240 VAC	100 ~ 240 VAC
Input Power Frequency	50 ~ 60 Hz	50 ~ 60 Hz	50 ~ 60 Hz	50 ~ 60 Hz	50 ~ 60 Hz	50 ~ 60 Hz	50 ~ 60 Hz
Standard Mounting Configuration	Hanging, Stacking	Hanging, Stacking	Hanging, Stacking	Hanging, Stacking	Hanging, Stacking	Hanging, Stacking	Hanging, Stacking
Certification	TUV-CE/CB/FCC/IC/UL	TUV-CE/CB/FCC/IC/UL	TUV-CE/CB/FCC/IC/UL	TUV-CE/CB/FCC/IC/UL	TUV-CE/CB/FCC/IC/UL	TUV-CE/CB/FCC/IC/UL	TUV-CE/CB/FCC/IC/UL

DIMENSIONS

