


Passenger Lift Specification

Project:	Hampton by Hilton, Bath Road, Heathrow	Project No:	1056
Client:	Acre Hotels	Drawing No:	AC(66)001
Purpose of Issue:	PLANNING ISSUE	Date of Issue:	March 2020

- 1.0 Please refer to M&E Consultant's Performance Specification document for lift speeds and minimum opening widths etc.
- 2.0 To comply with local building regulations.
- 3.0 Lift telephone to be connected to 24hr service helpline by lift provider and is also to be connected to reception.
- 4.0 To conform to BS 5655.
- 5.0 2 No. 10 person lifts with internal car size to suit requirements of Approved Document M of the building regulations.
- 6.0 Side opening doors with minimum 900mm clear opening.
- 7.0 Minimum 90 minute fire rated doors.
- 8.0 Lift sited within ground floor of Public Area as per plan AL(90)100.
- 9.0 Finishes (refer to attached sketch):
 - a. Doors and architraves: Brushed stainless steel.
 - b. Walls: High pressure laminate or pre-finished steel, colour t.b.c. All joints to be concealed.
 - c. Ceiling: Pre-finished steel, colour t.b.c, shallow vault with concealed reflected lighting.
 - d. Rear wall: Half height mirror from handrail to ceiling, full width of wall.
 - e. Handrail: Brushed stainless steel rail fitted to rear wall.
 - f. Signal panel: Panel and fittings to have brushed stainless steel finish.
 - g. Floor: To receive carpet finish by others.
- 10.0 Manufacturer's brochure and samples of above finishes to be approved by client prior to order.
- 11.0 Commissioning and training to be arranged to include hotel operator's staff to ensure smooth operation on opening night and breakdown procedures / phone numbers are in place.
- 12.0 In the event of fire the lift is to return to ground floor level for evacuation.
- 13.0 In the event of power failure the lift is to return to the nearest floor level for evacuation. Lift lighting to be connected to back-up power supply.
- 14.0 Lifts to be fitted with a key card control to prevent uncontrolled access to upper floor levels.

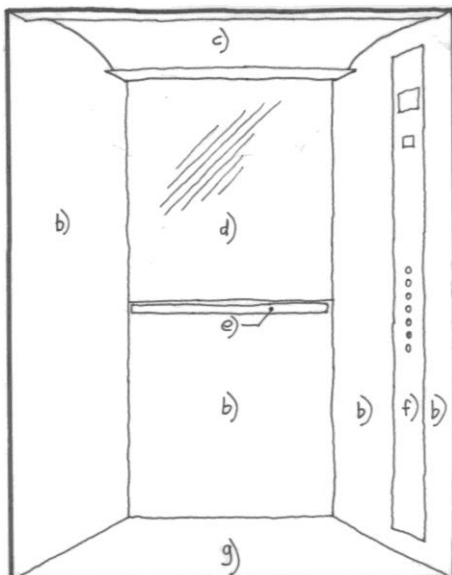

Finishes Key:



Typical Lift Interior View: