


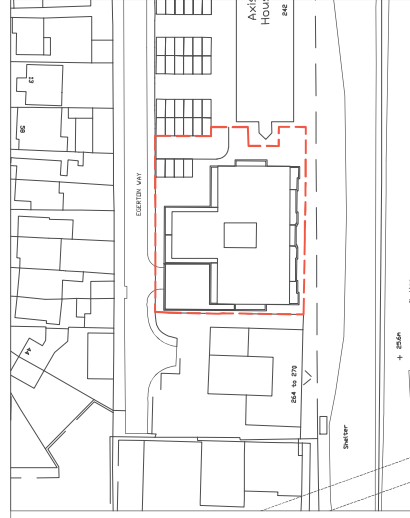

Color Code	Urban Overlay	Surface Cover Type	Factor	Area (sq ft)	Contribution	Notes
	Standard trees planted in connected tree area with a minimum soil depth of 18 inches (45 cm) or the projected canopy area of the mature tree.	Standard trees planted in connected tree area with a minimum soil depth of 18 inches (45 cm) or the projected canopy area of the mature tree.	0.8	150.0	104.0	Include 100 standard trees along the eastern side of section south.
	Extensive green roof with substrate of minimum settled depth of 60mm (2.4 inches) and vegetation blanket – meets the requirements of ULC Code 9214.	Extensive green roof with substrate of minimum settled depth of 60mm (2.4 inches) and vegetation blanket – meets the requirements of ULC Code 9214.	0.7	500.0	350.0	Includes 130 sq ft of lower roof and 370 sq ft of upper roof.
	Flower rich perennial planting.	Flower rich perennial planting.	0.7	91	63.7	50% of yellow area to flower-rich plants, 50% to green cover, 50% groundcover planting.
	Hedges (line of mature shrubs are or two shrubs wide).	Hedges (line of mature shrubs are or two shrubs wide).	0.6	61.6	37.0	
	Standard trees planted in the site with soil volumes less than two thirds of the projected canopy area of the mature tree.	Standard trees planted in the site with soil volumes less than two thirds of the projected canopy area of the mature tree.	0.6	74.0	44.4	Include 10 standard trees (north-east corner), 10 standard trees (south-east corner), 10 standard trees (south-west corner), and 5m corner trees (south direction).
	Green wall modular system or climbers rooted in soil.	Green wall modular system or climbers rooted in soil.	0.6	99.2	59.6	Green wall along the western elevation, approximately 2 meter high and 10m wide. Top 10m of wall will be light transmittal panel of the western elevator.
	Groundcover planting.	Groundcover planting.	0.5	117.4	58.7	50% of yellow area to flower-rich plants, 50% to green cover, 50% groundcover planting. Includes the coverage area of 220m ² specimen trees (10m x 22m) and 10m x 10m as additional area. Average shrub coverage area of 1.2 sqm.
	Permeable paving.	Permeable paving.	0.1	172.0	17.2	Include car parking access surface and gravel areas along the south and west building elevations.
	Sealed surfaces (e.g. concrete, asphalt, waterproofing, stone).	Sealed surfaces (e.g. concrete, asphalt, waterproofing, stone).	0.0	917.0	0.0	
	Total contribution	Total contribution			734.0	
	Total site area (sqm)	Total site area (sqm)				822.0