

Order Code: XCFC20CT

20W - Floodlight - CCTK Selector - 3000K/4000K/6000K



Features

- Ideal for retrofit of existing halogen fixtures, lighting buildings, car parks or doorways
- Available with high performance PIR or microwave detector
- Available in 4 different outputs
- Colour temperature adjustable via simple push switch
- High quality toughened safety glass
- Supplied with stirrup and 1 m of flex for column, bracket or surface fix
- Up to 120 lumens per Watt efficacy
- 30,000 hours lifetime [L70/B50]
- 3 Years Warranty

Construction

- Die-cast aluminium body finished with black marine grade paint finish
- Weatherproof IP65 construction
- CRI: Ra>80

Technical Data

General


Luminaire Wattage (W)	20
Weight (kg)	0.82
Operating Temperature (ta °C)	-20° to 40°

Dimensions

A (mm)	208
B (mm)	159
C (mm)	39

Light Output

Lumens (lm)	2400-2600
Efficacy (lm/W)	120

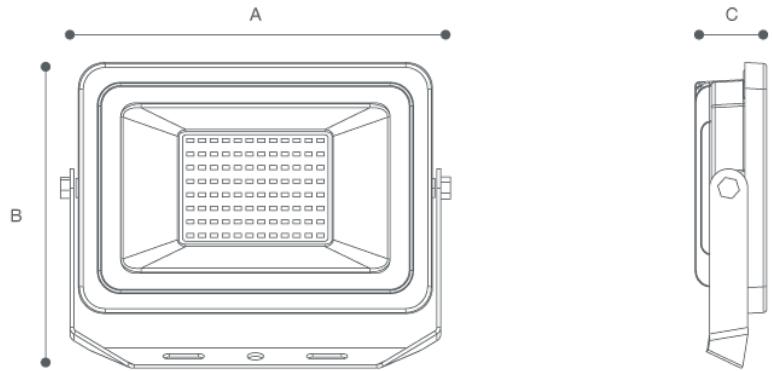

Electrical

Rated Input Current (A)	0.0839
Power Factor (pf)	0.9
Input Voltage Range (VAC)	220 to 240
Terminal Type	3 pole screw down

LED

CCT (K)	TRI-COLOUR
CRI	>80
Macadam Ellipses	<5