


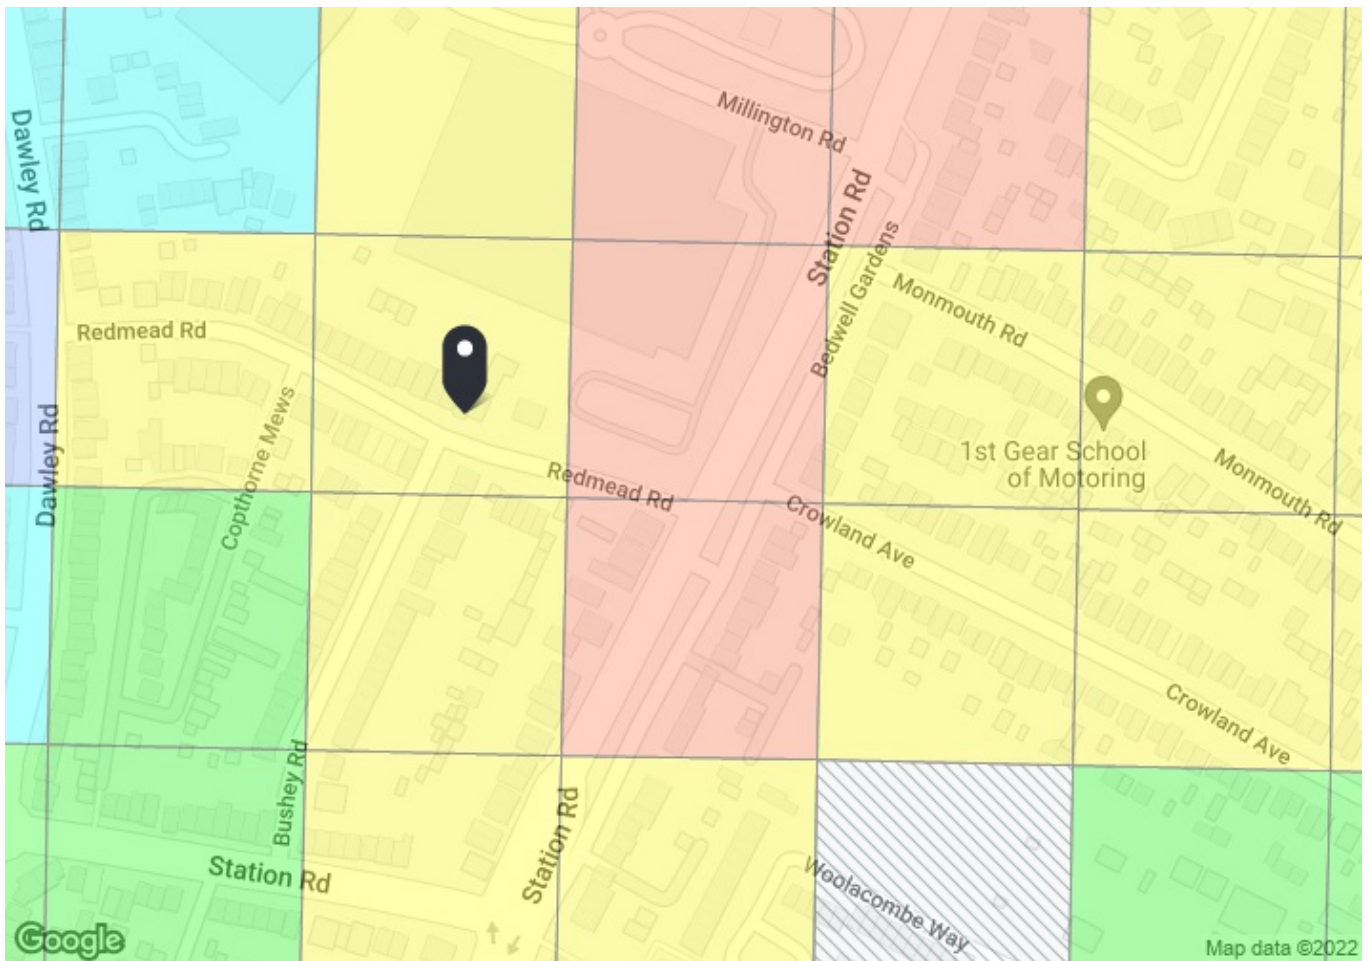

PTAL output for Base Year 4

2C Redmead Rd, Hayes UB3 4AU, UK
Easting: 509256, Northing: 178926


Grid Cell: 72777

Report generated: 07/09/2022

Calculation Parameters

Day of Week	M-F
Time Period	AM Peak
Walk Speed	4.8 kph
Bus Node Max. Walk Access Time (mins)	8
Bus ReliabilityFactor	2.0
LU Station Max. Walk Access Time (mins)	12
LU ReliabilityFactor	0.75
National Rail Station Max. Walk Access Time (mins)	12
National Rail ReliabilityFactor	0.75

Map key - PTAL



Map layers

 PTAL (cell size: 100m)

Calculation data

Mode	Stop	Route	Distance (metres)	Frequency (vph)	Walk Time (mins)	SWT (mins)	TAT (mins)	EDF	Weight	AI
Bus	STATION RD MILLINGTON RD	E6	233.77	6	2.92	7	9.92	3.02	0.5	1.51
Bus	STATION RD MILLINGTON RD	90	233.77	6	2.92	7	9.92	3.02	0.5	1.51
Bus	STATION RD MILLINGTON RD	H98	233.77	7.5	2.92	6	8.92	3.36	0.5	1.68
Bus	STATION RD MILLINGTON RD	140	233.77	8.5	2.92	5.53	8.45	3.55	0.5	1.77
Bus	STATION RD NORTH HYDE RD	U5	521.32	5	6.52	8	14.52	2.07	0.5	1.03
Bus	STATION RD NORTH HYDE RD	350	521.32	5	6.52	8	14.52	2.07	0.5	1.03
Bus	STATION RD NORTH HYDE RD	195	521.32	5	6.52	8	14.52	2.07	0.5	1.03
Bus	DAWLEY ROAD REDMEAD ROAD	U4	193.13	7.5	2.41	6	8.41	3.57	1	3.57
Rail	Hayes & Harlington	'PADTON-HTRWAPT 2T18'	826.95	2	10.34	15.75	26.09	1.15	1	1.15
Rail	Hayes & Harlington	'HTRWAPT-PADTON 2Y14'	826.95	2	10.34	15.75	26.09	1.15	0.5	0.58
Rail	Hayes & Harlington	'PADTON-OXFD 2N14'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'PADTON-OXFD 2N16'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'PADTON-OXFD 2N18'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'PADTON-OXFD 2N22'	826.95	0.67	10.34	45.53	55.86	0.54	0.5	0.27
Rail	Hayes & Harlington	'PADTON-OXFD 2N24'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'RDNGSTN-PADTON 2P09'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'OXFD-PADTON 2P11'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'RDNGSTN-PADTON 2P12'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'RDNGSTN-PADTON 2P14'	826.95	1.33	10.34	23.31	33.64	0.89	0.5	0.45
Rail	Hayes & Harlington	'RDNGSTN-PADTON 2P17'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'OXFD-PADTON 2P18'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'BNBR-PADTON 2P20'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'SLOUGH-PADTON 2P25'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'SLOUGH-PADTON 2P32'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'PADTON-RDNGSTN 2R13'	826.95	1.67	10.34	18.71	29.05	1.03	0.5	0.52
Rail	Hayes & Harlington	'PADTON-RDNGSTN 2R19'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Rail	Hayes & Harlington	'PADTON-TWYFORD 2R21'	826.95	0.33	10.34	91.66	102	0.29	0.5	0.15
Total Grid Cell AI: 18.21										