

## Light L01

**ELIPTA**  
the professionals' choice

TECHNICAL DATA SHEET

WALL LIGHTS

### **Elipta E9826WW - Titan26 LED Spotlight - 240v - 26w Warm White**

#### **Description**

The Elipta E9826WW is an adjustable wall or spike-mount 240v LED spotlight with an aluminium body and glare shield powder-coated in black. It has a high-efficiency 26w COB led providing light output equivalent to a 200w halogen lamp in a focused 36-degree beam for Uplighting trees and focal points.



|                            |                                                            |
|----------------------------|------------------------------------------------------------|
| <b>Electrical data</b>     | 2272Lm, 26w warm white (3000K) built in, non-dimmable, LED |
| <b>Colour/ Finish</b>      | Powder coated black aluminium body.                        |
| <b>Exterior Dimensions</b> | 206mm x 138mm including bracket.                           |

240v

Beam  
36°

IP65

Built-in  
LED

Glare  
shield


#### **Installation guidelines**

Stirrup bracket mounts on walls or the ground spike supplied. A 2m input cable is provided for connection to the mains supply via a separate weatherproof junction box or underground joint kit (not supplied).

Using a single RCD for large numbers of 240v fittings is not recommended due to the risk of nuisance tripping. We advise the use of separate RCD protection for each circuit and a maximum of 12 fittings per RCD.

**2 YEAR  
WARRANTY**

Exclusions: Damage by machinery, animals or the use of incorrect cleaning materials.  
Corrosion due to exposure to salt or chlorine.  
Damage due to incorrect installation practices.  
Responsibility for 3rd party cost; indirect or consequential loss

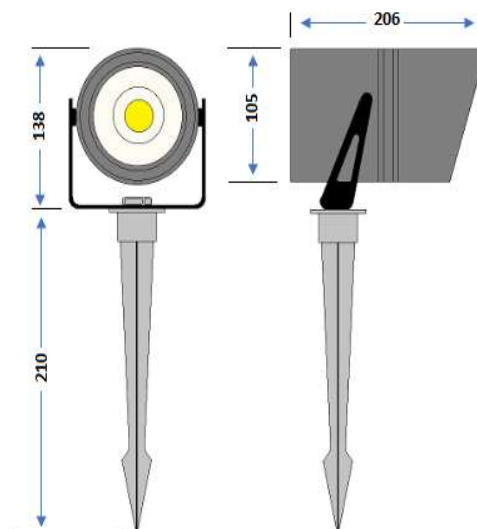

For further technical advice  
call: **01462 486777** or  
email: **technicalsupport@lightingforgardens.com**

[www.lightingforgardens.com](http://www.lightingforgardens.com)

# 6 Linksway

## Application ref 5380/APP/2021/2460

### Lights L02 & L03

Detail | lighting

Fritz

Code : DT.2051

CE IP65 CRI>90 <sup>3</sup>SDCM

#### Description

Round surface mounted LED spotlight. Adjustable 90 deg tilt, dimmable. IP rated.  
Supplied with anti-glare cowl, honeycomb & 2m lead

#### Materials

Die-cast aluminium,

#### Colour finish

Anthracite grey or -RAL

Dims (mm) 55 Ø x 165 (L)

Weight (KG) 1.5

#### Light Source

Option A. GU10 7w LED (560 lms) 240v 12°, 24°, 36°

Option B. 9w LED (800 lms) 200 mA 45v 18° 24° 36° 48° 60°

CCT available 2700K 3000K 4000K

Dimming: Mains, DALI, Casambi  allows dimming control of each fixture

Special Notes: Option B. requires remote driver box  
Supplied with ground fixing spike



t. 01908 613256  
[sales@detallighting.co.uk](mailto:sales@detallighting.co.uk)  
[www.detallighting.co.uk](http://www.detallighting.co.uk)

All products produced in accordance to EN60598

## Light L04

Detail | lighting

Henry

Code : DT.0712770

CE IP65 CRI 85 <sup>3</sup>SDCM

**Description**

Rectangular wall mounted LED fixture, up / down lighting effect. IP65 rated. High weather protection and contemporary design

**Materials** Die cast aluminium and etched diffuser  
**Colour finish** Anthracite, RAL to order

**Dimensions (mm)** 200 x 103 x 55

**Weight (KG)** 1.0

**Light Source**

Option A. 10w (500 lms) 240v integral driver

**CCT available** 3000K

**Dimming** On/off ; Casambi  allows control of individual fixtures

**Special Notes** Emergency available as a remote pack



6 Linksway

Application ref 5380/APP/2021/2460

Paving P01

**Manufacturer:** Unicom Starker

**Range:** Brazilian Slate

**Colour:** Elephant Grey

**Size:** 600x600mm

## Elephant Grey

41

BRAZILIAN SLATE



# 6 Linksway

## Application ref 5380/APP/2021/2460

### Paving P02 & P03

**Manufacturer:** Barleystone Paving **Range:** Glenbridge  
**Colour:** Willow **Size:** 3 size mix

*Illustration on next page*

**Barleystone Paving**  
THE PERFECT FINISH

For any further queries please email [sales@barleystone.com](mailto:sales@barleystone.com)  
UK: 0845 805 5330 IRL: +353 42 9675992  
[www.barleystone.com](http://www.barleystone.com)

## Product Specifications

### Glenbridge

Glenbridge offers the same strength, durability and maintainability as our other paving bricks, but is set apart by its unique textured surface, which allows it to combine the highest slip resistance with a natural appearance.




Glenbridge Burren



Glenbridge Rustic

**3-Size Mix Dimensions**



**Thickness:** 60mm

**Use:** Driveways, pedestrian areas - all domestic and commercial paving applications.

**Laying Patterns:** 3-size mix.

**Spacing nibs:** 1.5mm nibs on all edges to give accurate joint width.

**Finish:** Shotblast finish, coarse texture.

**Kerbs:** Complimentary kerb range available.

**Colours**



Burren Hazel Rustic Willow

| Product                | Brick Size mm                            | Colours Available             | No per Sq.m      | No per pack      | m <sup>2</sup> per slice | Pack Size Sq.m | Pack Weight Kgs | No Packs per Artic | Sq.m per Arctic Load |
|------------------------|------------------------------------------|-------------------------------|------------------|------------------|--------------------------|----------------|-----------------|--------------------|----------------------|
| <b>60mm 3 Size Mix</b> | 225x150x50<br>150x150x50<br>112.5x150x50 | Willow, Burren, Rustic, Hazel | 17*<br>14*<br>6* | 136<br>112<br>48 | 1                        | 8              | 1100            | 25                 | 200                  |

\* as part of 3-size mix total

**Raw Materials:**  
Sand, Cement, Stone and Pigment

**Manufacturing Process:**  
Hydraulically pressed

**Manufacturing Standards:**  
Manufactured to BS EN 1338:2003

**Installation:**  
Installed to BS 7533-3:2005

**Performance Criteria:**  
Strength: > 3.6MPa or 250 N/mm

**Application:**  
Please refer to Health & Safety Data Sheets.

**Manufacturing Standards:**  
All Barleystone products are manufactured to meet and exceed BS and exceed BS and European Standards.

**Quality Systems:**  
Barleystone paving blocks undergo tesng Å to standard EN 1338:2003 and are covered by CE certification.

Barleystone Paving, Taghart South, Shercock, Co. Cavan, Ireland.

Glenbridge\_Jul17

## 6 Linksway

Application ref 5380/APP/2021/2460

### Paving P02 & P03

**Manufacturer:** Barleystone Paving

**Range:** Glenbridge

**Colour:** Willow

**Size:** 3 size mix

*Specsheet on previous page*

