

Aggregate - Estimation

Product designation: SHW 803 Type 1 0 / 32 OC75 Gp UF9 C90/3

Producer: Torr Quarry

Source: Limestone

Delivery / Sampling

Sample No:	SCYA/0047327	Sampled/ tested
		03/09/2020 09:00
Sampler:	Danny San	Sampling point:
Place of sampling:	Laboratory	Initiator
Weather	Overcast	Project designation:
Comments	sampled from Days yard at Crawley	


SAMPLE ANALYSIS

EN 933-1: Particle size distribution, Sieving method

Sieve size	Passing %	Specification limits	Complies?
63 mm	100	100 - 100	yes
31.5 mm	91	75 - 100	yes
16 mm	67	55 - 81	yes
8 mm	55	34 - 64	yes
4 mm	42	20 - 50	yes
2 mm	30	14 - 40	yes
1 mm	22	10 - 30	yes
0.063 mm	8.2	0.0 - 9.0	yes
Water content:	2.9	not specified	-
Uniformity coefficient	100.4	not specified	-
Additional grading requirements:			
passing 16.0mm - ret 8.0mm	12	7 to 30	yes
passing 8.0mm - ret 4.0mm	13	7 to 30	yes

Remark

sampled from Days yard at Crawley

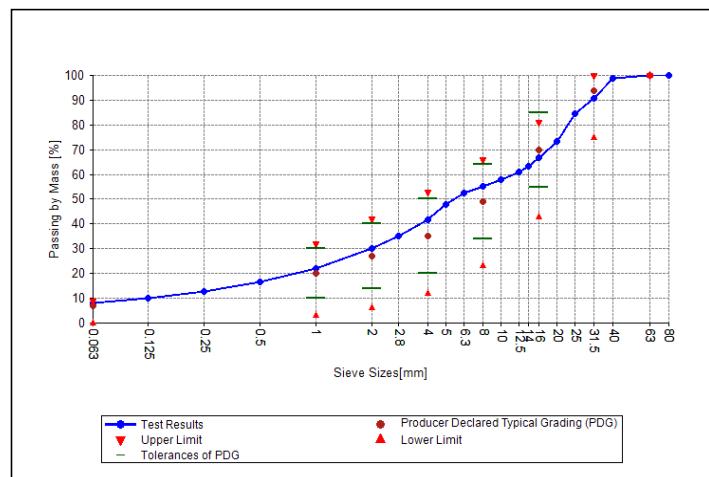

Berkshire, 22/02/2021



Danny San

Aggregates/Asphalt Snr Tech



Danny San

Aggregates/Asphalt Snr Tech