

Aggregate - Estimation

Product designation: SHW 803 Type 1 0 / 32 OC75 Gp UF9 C90/3

Producer: Torr Quarry

Source: Limestone

Delivery / Sampling

Sampled/ tested

Sample No: SHTA/0050048

22/10/2020 11:30

Sampler: Tom Wilkes

Sampling point:

Stockpile

Place of sampling: Yard

Initiator

Theale Railhead

Weather

Dry

Project designation:

Comments


Type 1

SAMPLE ANALYSIS

EN 933-1: Particle size distribution, Sieving method

Sieve size	Passing %	Specification limits	Complies?
63 mm	100	100 - 100	yes
31.5 mm	92	75 - 100	yes
16 mm	65	55 - 81	yes
8 mm	51	34 - 64	yes
4 mm	35	20 - 50	yes
2 mm	25	14 - 40	yes
1 mm	19	10 - 30	yes
0.063 mm	8.4	0.0 - 9.0	yes
Water content:	2.7	not specified	-
Uniformity coefficient	102.1	not specified	-
<i>Additional grading requirements:</i>			
passing 16.0mm - ret 8.0mm	14	7 to 30	yes
passing 8.0mm - ret 4.0mm	16	7 to 30	yes

Remark

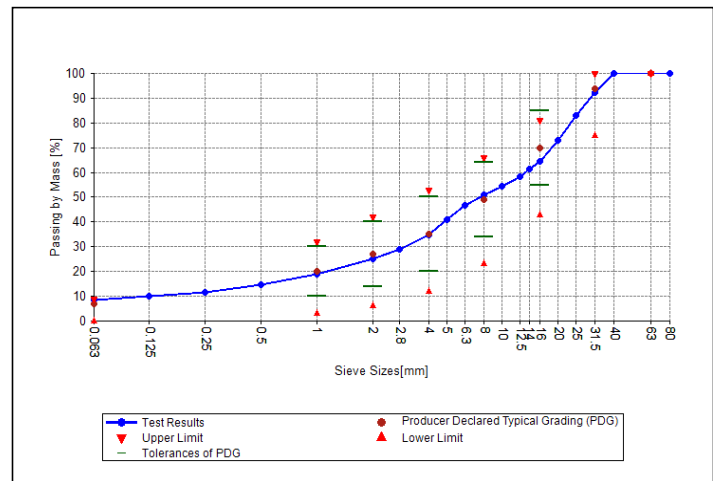

Berkshire, 22/02/2021



Timothy Cooke
Aggregates/Asphalt ATM



Timothy Cooke
Aggregates/Asphalt ATM