

Aggregate - Estimation

Product designation: SHW 803 Type 1 0 / 32 OC75 Gp UF9 C90/3

Producer: Torr Quarry

Source: Limestone

Delivery / Sampling

Sampled/ tested

Sample No: SHTA/0051521

19/11/2020 10:30

Sampler: Tom Wilkes

Sampling point:

Stockpile

Place of sampling: Yard

Initiator

Acton Rail Head

Weather: Overcast

Project designation:


Comments

SAMPLE ANALYSIS

EN 933-1: Particle size distribution, Sieving method

Sieve size	Passing %	Specification limits	Complies?
63 mm	100	100 - 100	yes
31.5 mm	87	75 - 100	yes
16 mm	60	55 - 81	yes
8 mm	42	34 - 64	yes
4 mm	31	20 - 50	yes
2 mm	22	14 - 40	yes
1 mm	16	10 - 30	yes
0.063 mm	7.8	0.0 - 9.0	yes
Water content:	3.5	not specified	-
Uniformity coefficient	90.9	not specified	-
<i>Additional grading requirements:</i>			
passing 16.0mm - ret 8.0mm	18	7 to 30	yes
passing 8.0mm - ret 4.0mm	11	7 to 30	yes

Remark

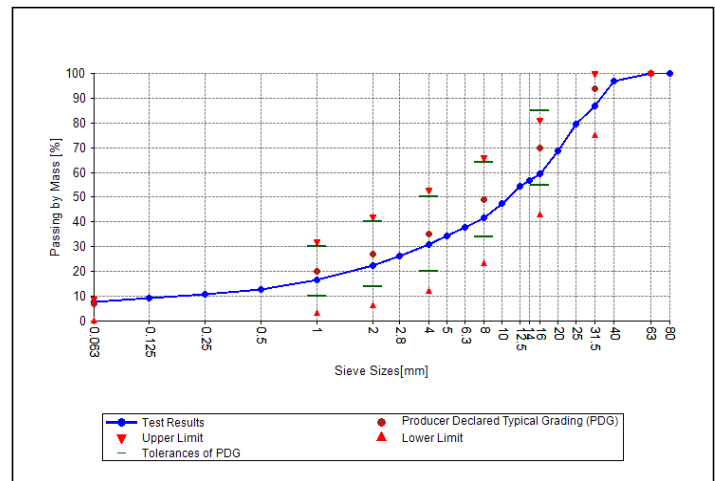

Berkshire, 22/02/2021



Timothy Cooke

Aggregates/Asphalt ATM



Timothy Cooke

Aggregates/Asphalt ATM