

Aggregate - Estimation

Product designation: SHW 803 Type 1 0 / 32 OC75 Gp UF9 C90/3

Producer: Torr Quarry

Source: Limestone

Delivery / Sampling

Sampled/ tested

Sample No: SHTA/0051561

20/11/2020 08:00

Sampler: Tom Wilkes

Sampling point:

Stockpile

Place of sampling: Yard

Initiator

Theale Railhead

Weather

Dry

Project designation:


Comments

SAMPLE ANALYSIS

EN 933-1: Particle size distribution, Sieving method

Sieve size	Passing %	Specification limits	Complies?
63 mm	100	100 - 100	yes
31.5 mm	86	75 - 100	yes
16 mm	61	55 - 81	yes
8 mm	41	34 - 64	yes
4 mm	26	20 - 50	yes
2 mm	18	14 - 40	yes
1 mm	13	10 - 30	yes
0.063 mm	6.9	0.0 - 9.0	yes
Water content:	3.9	not specified	-
Uniformity coefficient	41.6	not specified	-
<i>Additional grading requirements:</i>			
passing 16.0mm - ret 8.0mm	20	7 to 30	yes
passing 8.0mm - ret 4.0mm	15	7 to 30	yes

Remark

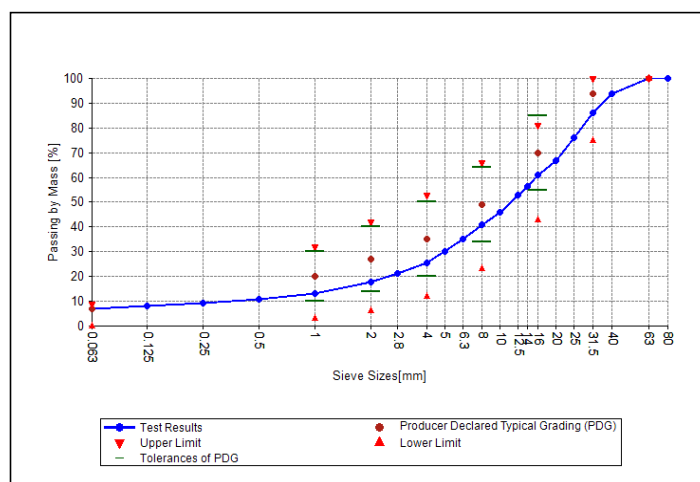

Berkshire, 22/02/2021



Timothy Cooke

Aggregates/Asphalt ATM



Timothy Cooke

Aggregates/Asphalt ATM