APAL FILE REFERENCE
2152/WORKING/TS/2152_TS_16/17


Notes

This drawing is subject to copyright.
Do not scale from this drawing.

Based on drawing by ATKINS
Drawing number 5105977_UXB_EA_0103_A01-GA

North

1413 C2
1412 C2
1411 A1
1410 B2
1409 C2
1406 C2
1405 A1
1403
1402 C2
G1401
1404 A1
1400 B2
1399 B1&2
1398 C2
1397 B2
1396 U
1395 U
1394 C2
1391/1392
TREES TO BE RETAINED IF POSSIBE - VIABILITY TO BE ASSESSED ON SITE AT COMMENCEMENT OF WORKS
1390 B1&2
1392 B1&2
1391 B1&2
1388 C2
1389 B2
1387 C2
1386 B2
1385 B2
1384 B1&2
1383 B1&2
1384
TREE TO BE RETAINED IF POSSIBE - VIABILITY TO BE ASSESSED ON SITE AT COMMENCEMENT OF WORKS
1340 B1&2
1408 B1&2
1407 B1&2
1341 B1&2
1342 A1
1393 C1&2
2705
2706
2707
2713
2714
1343
1344
TREE WITH STRUCTURAL DEFECTS IDENTIFIED FOR REMOVAL IN PHASE1B RMA
1346 Lime B1
1347
1348
1349 Lime B1
1350
1351 Cedar B2
1352
1352a
1352b London Plane B1
1352c Yew B1
1353 Lime B1&2
1354 Plane C2
1355 Maple B2
1356 Maple C2
1357 Plane B2
1358 Plane B1&2
1359 Beech A1
1360 Plane B1&2
1362 Sycamore C2
1363 Sycamore C2
1364 Holly C2
1365 Holly C2
1366 Plane B1&2
1367 Sycamore C2
1368 Sycamore C2
1369 Oak B2
1370 Sycamore C2
1371 Maple C2
1372 Maple C2
1373 Maple C2
1374 Maple C2
1375 Redwood A/b1
1376 Oak B1&2
1377 Ash C2
1378 Birch C2
1379 Plane A1
1383 Oak B/c2
ST ANDREW'S ROAD
VINE LANE
Vine Lane
49.376
51.061
53.059
BOL
IC
SC
CATV
H
SV
CONCRETE
MH
LP
CA
TP
BUSH

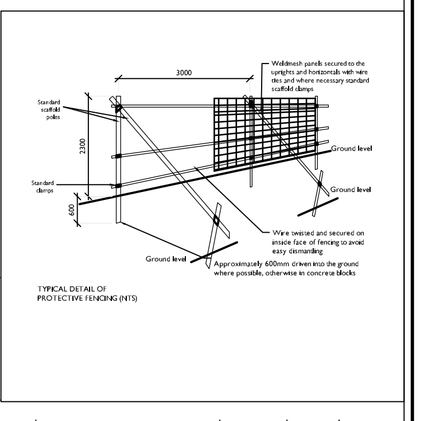

TYPICAL DETAIL OF PROTECTIVE FENCING (NTS)

LEGEND

- Outline Application boundary
- Reserved Matters application phase boundary
- Tree to be retained - indicative canopy spread - See note 2
- Root Protection Area (RPA) of tree to be retained - See note 2
- Tree to be removed to facilitate development (earthworks associated with footpaths and highways)
- Temporary protective fencing installed prior to construction (must comply with BS5387:2012, section 6.2)
- Indicative area of canopy or RPA within area of construction operations. No-dig construction methods in accordance with BS5837:2012 in RPAs. No damage to be caused to canopies by movement of equipment etc where canopies overhang roadways and area of construction.

NOTES
1 - All trees not identified as being removed should be retained and protected.
2 - Tree canopies and Root Protection Areas (RPAs) are based on tree surveys undertaken in May & August 2012 and therefore must be taken as a minimum area (refer separate Tree Schedule 2152-EA-Tree_Schedule_0912)
3 - Temporary protective fencing should conform to the standard detail set out in BS5387.
4 -No storage of plant or materials may occur within the RPA or within the areas of protective fencing.
5 - Where the canopy and/or RPA of a tree falls outside the proposed protective fencing, the contractor must ensure that no damage occurs to the trees as a result of vehicles, plant or construction.
6 - Contractor to submit detailed, site specific method statement to ensure all trees are protected and to ensure that all operatives receive adequate training with regard to working in the vicinity of trees and RPAs.
7 - No trees to be removed until prior consultation with project ecologist.
8. Fencing to be offset 300mm from back of kerb

Reproduced from the Ordnance Survey Map with the permission of the Controller of Her Majesty's Stationery Office © Crown Copyright. Allen Pyke Associates Ltd Licence No. AL 100032189

Rev	Description	Date	Drawn	Checked

Drawing Status
PLANNING

Allen Pyke Associates
Landscape architecture Urban design Environmental planning
The Factory, 2 Acre Road,
Kingston upon Thames,
Surrey KT2 6EF
T 020 8549 3434 F 020 8547 1075
www.allenpyke.co.uk
KINGSTON UPON THAMES • CAMBRIDGE
A registered practice of the Landscape Institute

Client: VSM (UXBRIDGE LTD)	Scale: 1/250@A1
Project: RAF UXBRIDGE EASTERN ACCESS	By/Chk: LB/VR
Drawing Title: TREE RETENTION/PROTECTION STRATEGY	Date: 11/09/12
Drawing Number: 2152-TS-17	Revision