


Tree protection- 11 PASTURES MEAD UXBRIDGE UB10 9PU

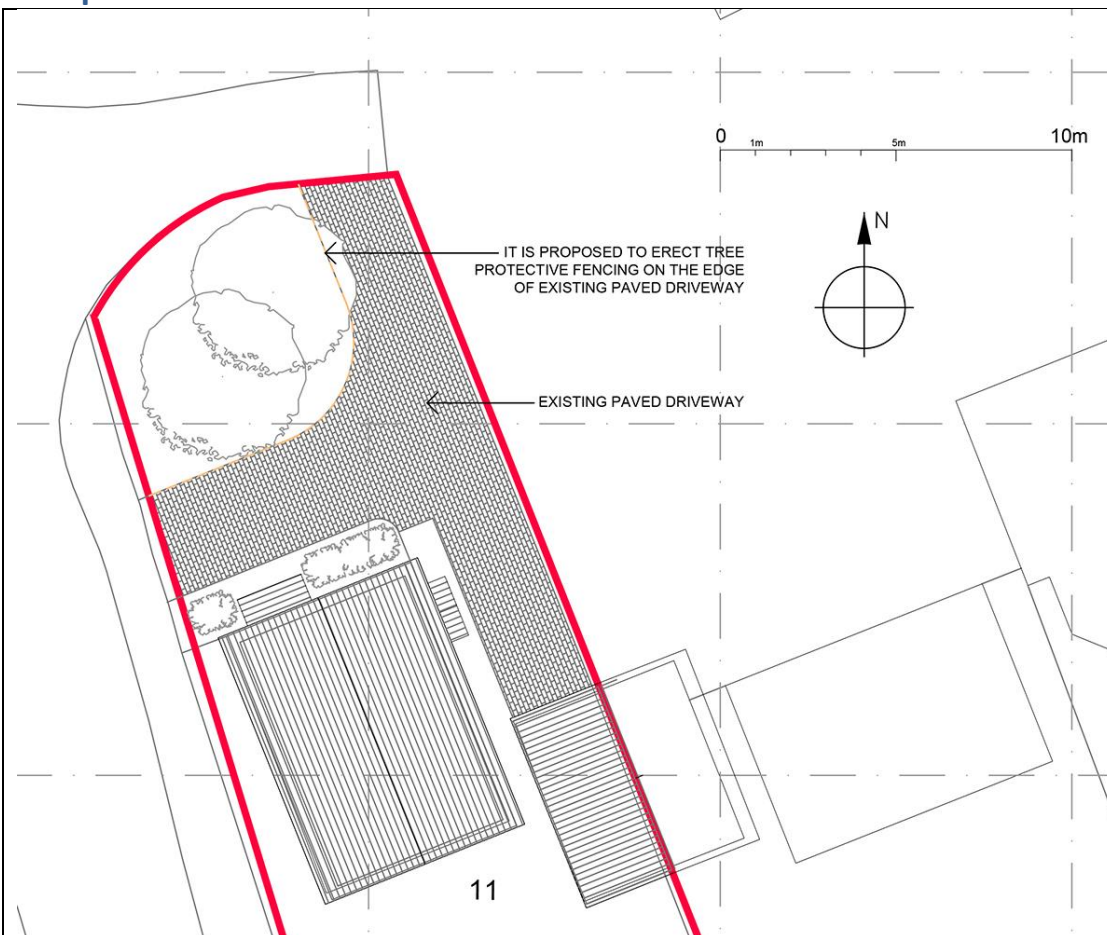

Protective fencing to be min. 1.5m high and to be erected in accordance with BS 5837 before commencement of works.

The fencing shall be retained in position until development is completed. The area within the approved protective fencing shall remain undisturbed during the course of the works and in particular in these areas:

- * There shall be no changes in ground levels;
- * No materials or plant shall be stored;
- * No buildings or temporary buildings shall be erected or stationed.
- * No materials or waste shall be burnt; and
- * No drain runs or other trenches shall be dug or otherwise created, without the prior written consent of the Local Planning Authority.

BRITISH STANDARD

BS 5837:2012

Figure 3 Examples of above-ground stabilizing systems

