




Kingfisher Lighting

Datasheet

SEMITA Urban

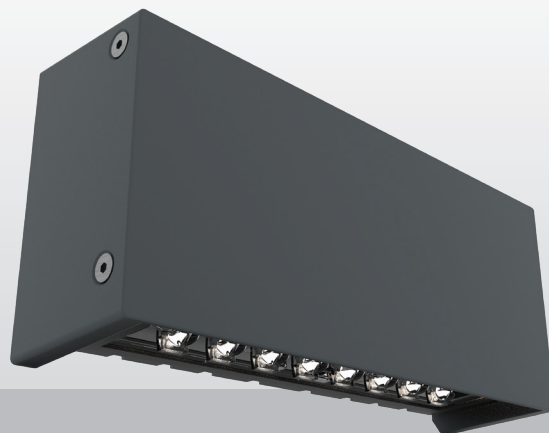

Specification Text

The luminaire shall be manufactured from high pressure die-cast aluminium. It shall have an LED efficacy of up to 146 luminaire lm/W and will be capable of producing up to 1,611 luminaire lumens at 4000K with a CRI >70. It shall have an asymmetric forward throw optic and is rated at IP66 and IK10.

Specification


Weight: 2.42 kg
Material: Die-cast Aluminium
Paint Finish: Anthracite Grey

Key Features


- 6W - 11W
- 812 - 1,611 Luminaire Lumens
- Efficacy up to 146 lm/W
- 4000K, CRI >70
- Lifetime >100,000hr
- Asymmetrical
- Driver included
- BESA box fixing point




Optics

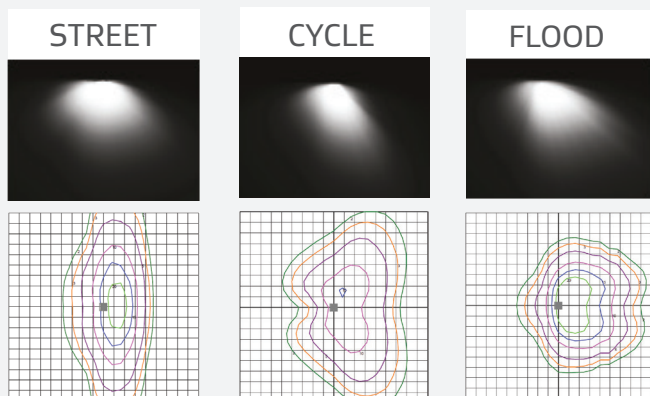

Dimensions

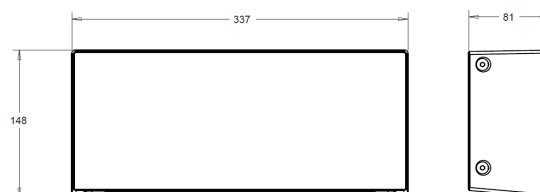

Code	Power	Light Source	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight (kg)	Paint Finish
SEMUFL08D	6W	LED	812	Flood Light Optic (FL)	4000	IP66	IK10	2.4	Anthracite Grey
SEMUFL15D	11W	LED	1611		4000	IP66	IK10	2.4	Anthracite Grey
SEMUOC08D	6W	LED	802	Path optic (OC)	4000	IP66	IK10	2.4	Anthracite Grey
SEMUOC15D	11W	LED	1570		4000	IP66	IK10	2.4	Anthracite Grey
SEMUST08D	6W	LED	783	Street Optic (ST)	4000	IP66	IK10	2.4	Anthracite Grey
SEMUST15D	11W	LED	1496		4000	IP66	IK10	2.4	Anthracite Grey

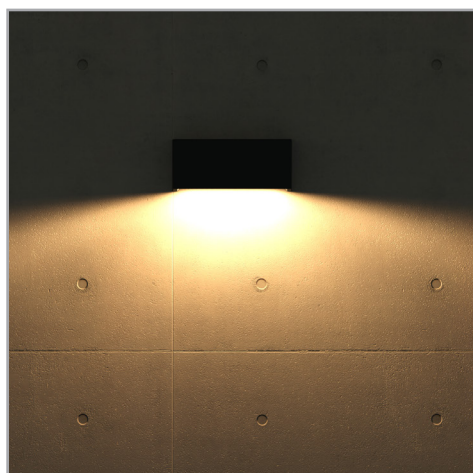

Accessories / Options

- Comfort diffuser
- Control options
- Dimmable options
- Emergency/ Photocell options
- Colour Temperature options

Mounting Options

- Wall mounted

