



Fizzy Living, Pressing Lane, Hayes

Daylight and Sunlight Assessment

Job No: 5396

Issued: February, 2024

Issue No.: 1



Contents

1.0	Introduction	3
2.0	Project Summary	4
3.0	Methodology	5
4.0	Modelling & Data Sources	6
5.0	BRE Guidance Targets	7
6.0	Window Schedules	8
7.0	Daylight Impact Results	9
8.0	Sunlight Impact Results	10
9.0	Sunlight to Neighbouring Open Spaces	11
10.0	Conclusions	12

Document Prepared By:

Ollie Westover

Dated:

13.02.24

Signed:

A handwritten signature in black ink, appearing to read 'Ollie Westover'.

Document Authorised By:

Bernice Waterman

Dated:

13.02.24

Signed:

A handwritten signature in black ink, appearing to read 'Bernice Waterman'.

This report has been prepared for the exclusive use of the commissioning party and may not be reproduced without prior written permission from T16 Design.

All work has been carried out within the terms of the brief using all reasonable skill, care, and diligence. No liability is accepted by T16 Design for the accuracy of data or opinions provided by others in the preparation of this report, or for any use of this report other than for the purpose for which it was produced.



1.0 Introduction

- 1.1 This daylight and sunlight assessment has been prepared to support a planning application for the proposed extension of the site known as Fizzy Living, 8 Pressing Lane, Hayes.
- 1.2 The report assesses the proposals in respect of daylight, sunlight and overshadowing matters, having regard to industry standard guidance.
- 1.3 The report concludes that the proposal is acceptable and in accordance with planning policy requirements in relation to daylight and sunlight.
- 1.4 There is no existing specific National Planning Policy relating to the prospective impacts of developments on daylight and sunlight on their surrounding environment.
- 1.5 However, the NPPF (Para 129) does refer to daylight and sunlight in relation to density, encouraging Local Planning Authorities to take a flexible approach to applying policies and guidance relating to the impacts of proposals where they would otherwise inhibit making effective use of the site.
- 1.6 The BRE Report 'Site Layout Planning for Daylight and Sunlight: A Guide to Good Practice' (3rd Edition, 2022) is the established National guidance to aid the developer to prevent and/or minimise the impact of a new development on the availability of daylight and sunlight in the environs of the site and the assessment of light within proposed new dwellings.
- 1.7 It refers in turn to the daylight and sunlight recommendations in BS EN 17037: 2018+A1:2021 (with UK Annexe): 'Daylight in Buildings'
- 1.8 These reference documents are accepted as the authoritative works in the field on daylight, sunlight and overshadowing and the BRE guidance specifically referred to in many Local Authorities' planning policy guidance for daylighting.
- 1.9 The methodology therein has been used in numerous lighting analyses and the standards of permissible reduction in light are accepted as the industry standards.

2.0 Project Summary

- 2.1 The proposal site is a space at first floor level, between the two blocks which make up the Fizzy Living development, Pressing Lane, Hayes.
- 2.2 It is currently an open-framed structure.
- 2.3 The proposal is to infill the site, creating an enclosed space to be used as a gym.
- 2.4 The impacts of the scheme have been assessed, in line with BRE guidance. Generally, it is the impacts on residential neighbours which are of primary concern.
- 2.5 Only the apartments adjacent in Fizzy Living itself have been assessed. Other neighbours are sufficiently distant from the site.
- 2.6 Further details on the location of the assessed neighbours and windows are given in Section 5.0.



Site Location



3.0 Methodology

3.1 For this analysis, we have undertaken the most common calculations for the change in daylight and sunlight to existing buildings, as recommended in BRE Digest 209. These are:

- Vertical Sky Component (VSC) for daylight
- Annual Probable Sunlight Hours and Winter Probable Sunlight Hours (A/WPSH) for sunlight impacts

3.2 The VSC method measures the general amount of light available on the outside plane of the window as a ratio (%) of the amount of total unobstructed sky viewable following introduction of visible barriers such as buildings. The maximum value is just under 40% for a completely unobstructed vertical wall.

3.3 The VSC is calculated using computer simulation under a CIE overcast sky. This works by simulating the amount of visible sky from the centre point of each window. It is not affected by orientation and so all potentially affected windows are assessed.


3.4 Annual Probable Sunlight Hours (APSH) and Winter Probable Sunlight Hours (WPSH) are a measure of the amount of potential direct sunlight that is available to a given surface. APSH covers sunlight over the whole year and WPSH from September 21st to March 21st. The number of total available hours is calculated from a data file in the software, built up over a number of years of actual weather data records.

3.5 Only windows which face within 90° of due south need be assessed for sunlight.

3.6 PSH can also be used to assess the impacts on neighbouring gardens and amenity spaces. This is looked at in Section 9.

4.0 Modelling & Data Sources

- 4.1 The first stage of the analysis is to create the analysis model of the existing site condition and the proposal. This allows us to analyse the impact of the proposal when compared to the existing condition.
- 4.2 2D drawings and a 3D model have been provided by the design team. These drawings are used to construct a 3D analysis model which is exported into the specialist daylight software. Calculations are then run, for both existing and proposed scenarios.
- 4.3 Sufficient detail is added to the model for the analysis. In accordance with BRE recommendations, trees and foliage have been omitted from the calculations.
- 4.4 Information on the properties has been provided to us by the design team in the form of drawings and a model giving the site as existing and proposed and photographs of the site and surroundings.
- 4.5 Web-based mapping sources and photos have been used to for location and size of neighbouring windows.

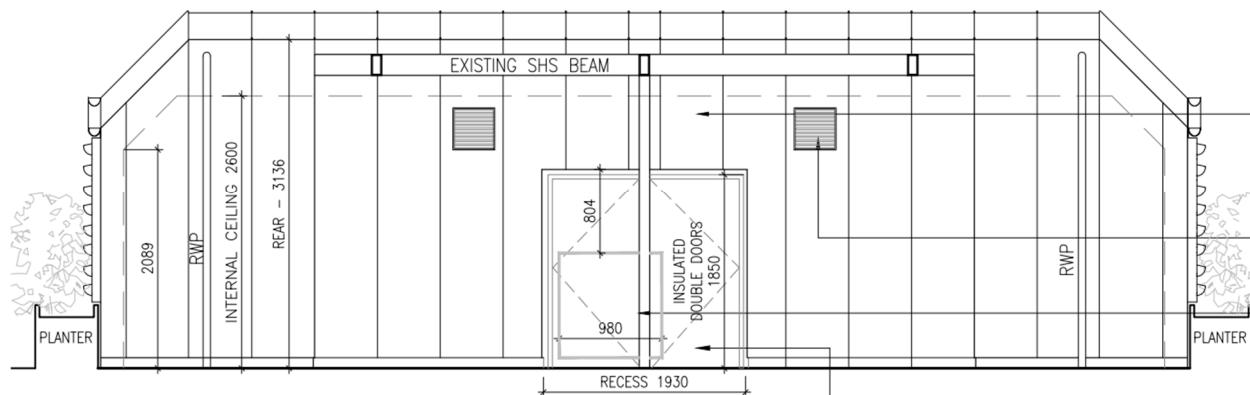

Front Elevation as Proposed



5.0 BRE Guidance Targets

- 5.1 The reference document for this analysis, BRE Digest 209, gives the methodology for undertaking the calculations. It also provides benchmark figures for the acceptable reduction in the daylight on existing properties which might be affected by development.
- 5.2 Specifically, the guidance gives figures for the VSC and APSH, as a percentage reduction that is "permissible" for the effect on existing windows.
- 5.3 It is worth noting the following statement in the Guidance introduction:
- 5.4 "The guide is intended for building designers and their clients, consultants and planning officials. The advice given here is not mandatory and this document should not be seen as an instrument of planning policy. Its aim is to help rather than constrain the developer.
- 5.5 Although it gives numerical guidelines, these should be interpreted flexibly because natural lighting is only one of the many factors in site layout design.
- 5.6 The relevant BRE recommendations for daylight and sunlight are:
 - The Vertical Sky Component measured at the centre of a window should be no less than 27, or if reduced to below this, no less than 0.8 times the former value.
 - The window should receive at least 25% of available annual sunlight hours and more than 5% during the winter months (September 21st to March 21st), or, where this is not the case, 80% of its former value.

6.0 Window Schedules





7.0 Daylight Impact Results

- 7.1 The Vertical Sky Component has been calculated for the 8 assessed windows for both the existing and proposed conditions.
- 7.2 As can be seen in the results below, all windows retain 80% of their current values.
- 7.3 There is virtually no impact to any windows facing the site.
- 7.4 The scheme is therefore compliant with BRE recommendations in relation to daylight impacts.

Vertical Sky Component				
Window	Existing VSC	Proposed VSC	% Retained	Meets BRE Guidance?
1	27.36	27.36	100.00%	Yes
2	19.88	19.88	100.00%	Yes
3	6.64	6.64	100.00%	Yes
4	13.10	13.10	100.00%	Yes
5	7.56	7.56	100.00%	Yes
6	10.56	10.56	100.00%	Yes
7	23.77	23.77	100.00%	Yes
8	21.26	20.83	97.98%	Yes



8.0 Sunlight Impact Results

8.1 BRE guidance states that only windows which face within 90° of due south need be assessed for sunlight provision. In this instance, 4 windows fall into this category. The Annual Probable Sunlight Hours has been calculated for these windows for both the existing and proposed conditions using the methodology described previously, over the whole year, and through the "winter months" (September 21st until March 21st).

8.2 The BRE guidance states that the sun lighting may be adversely affected if the centre of the window:

- Receives less than 25% of annual hours or less than 5% of winter hours
- And
- Receives less than 80% of its current sunlight hours during either period
- and
- Has a reduction in sunlight over the whole year greater than 4% of annual probable sunlight hours

8.3 It is clear from the wording of the above that all three clauses need to be met to qualify as an adverse impact. Thus, if the window does not meet any one of these criteria, the impact is acceptable.


8.4 The results below show that the assessed windows retain 80% of their values both annually and over the winter months.

8.5 The scheme is therefore compliant with BRE guidance in relation to sunlight impacts.

Window	Annual Sunlight Hours			Winter Sunlight Hours			Meets Guidance?
	Ex. Hrs Received (%)	Prop. Hrs Received (%)	% Retained	Ex. Hrs Received (%)	Prop. Hrs Received (%)	% Retained	
1	44.42	44.42	100.00%	9.84	9.84	100.00%	Yes
2	38.53	38.53	100.00%	7.00	7.00	100.00%	Yes
3	11.30	11.30	100.00%	7.28	7.28	100.00%	Yes
4	22.31	22.31	100.00%	9.77	9.77	100.00%	Yes

9.0 Sunlight to Neighbouring Open Spaces

- 9.1 Residential gardens and open spaces are generally assessed using the sunlight hours test, but only on March 21st. The guidance describes a well-lit space as being one which receives at least 2 hours of direct sunlight on this date over 50% of its area.
- 9.2 BRE guidance also uses the "80%" rule for this test, whereby the effects are considered acceptable if the remaining sunlight is in excess of 80% of the existing level. This clause only applies if the space is reduced to less than 50% of the area well sunlit.
- 9.3 The private amenity spaces either side of the site were assessed using this methodology, as identified below.
- 9.4 As can be seen, the neighbouring amenity spaces retain in excess of 80% of their existing area that receives 2 hours or more of sunlight on March 21st and so the scheme is compliant with the BRE guidance in relation to sunlight impacts to gardens and overshadowing.

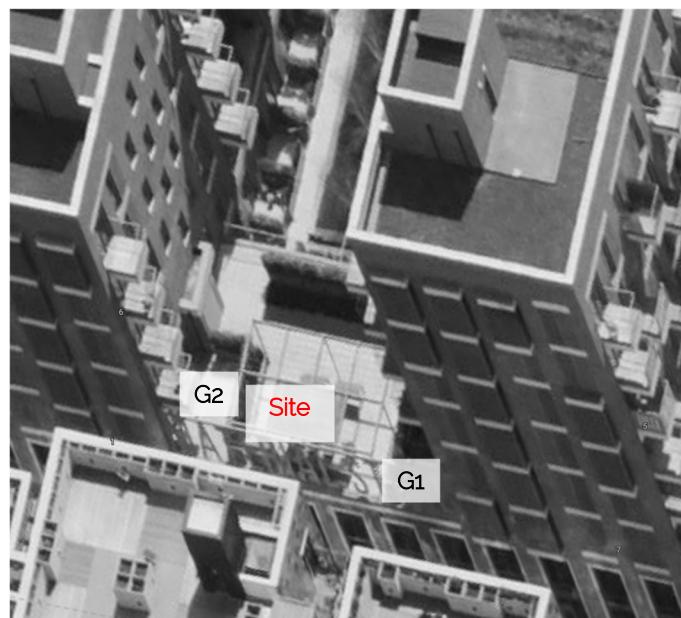

Amenity Sunlight Hours				
Area	Existing Area Receiving 2 Hours	Proposed Area Receiving 2 Hours	% Retained	Meets BRE Guidance?
G1	68.3%	59.4%	86.97%	Yes
G2	2.3%	2.3%	100.00%	Yes



10.0 Conclusions

- 10.1 Using industry standard methodology, we have made numerical analyses to ascertain the effects of the proposed infill development at the Fizzy Living site, Pressing Lane, Hayes, and the levels of change in daylight and sunlight for the window of the neighbouring properties.
- 10.2 The main criteria used in this analysis to show compliance are the Vertical Sky Component for daylight impacts and Annual and Winter Probable Sunlight Hours for sunlight impacts
- 10.3 As has been shown, the effect on VSC is within the 80% guidance value for all of the assessed windows.
- 10.4 There will therefore be no adverse impact on neighbouring residents in terms of daylight.
- 10.5 In terms of sunlight, the assessed windows retain 80% of their existing values both annually and over the winter months.
- 10.6 The neighbouring amenity spaces nearest to the site retain in excess of 80% of their existing area that receives 2 hours or more of sunlight on March 21st
- 10.7 The scheme is therefore compliant with BRE guidance in relation to sunlight impacts.
- 10.8 From a planning perspective therefore, it is the conclusion of this report that the proposed development is entirely acceptable for planning, in daylight and sunlight terms.



T16 Design Ltd.

T: 01206 572452

E: info@t16design.com

W: www.t16design.com

© 2024