


Plain Tile

Available in a range of thirteen natural shades, granular, through-coloured and acrylic coated, to match any roofing environment.

KEY ADVANTAGES

- Versatile concrete tile with wide scope for a variety of roofing effects
- Quick and easy to lay
- Smooth, coated and sanded finishes to blend with every regional roofing style

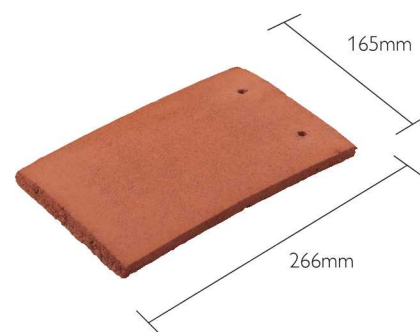

PRODUCT DATA

Size (overall)	268 x 165mm
Minimum Pitch	35°
Maximum Pitch (subject to fixing specification)	90°
Minimum Headlap	Below 90° 65mm / at 90° 35mm
Maximum Headlap	88mm
Minimum Gauge/Batten Spacing	88mm
Maximum Gauge/Batten Spacing	below 90° 100mm / at 90° 115mm
Hanging Length (approx.)	248mm
Cover (all figures are net and do not allow for wastage)	
Linear cover of 1 tile	165mm
Covering capacity	below 90° 60 tiles/m ² / at 90° 52 tiles/m ²
Weight	below 90° 75kg/m ² / at 90° 65kg/m ²
per pallet, including pallet (approx.)	1.01 tonnes
per 1000	1.25 tonnes
Battens Required (at max. gauge)	below 90° 10.0m/m ²
Batten Size	
Rafter centres up to 600mm	38 x 25mm
Fixing Clips	Top Tile Clips
Nail Size for Tiles**	40 x 2.65mm (A/A)
Pallet Quantities	Tiles per pallet 768 / Tiles per pack 16 / Packs per pallet 48

*All weights nominal ** (A/A) Aluminium Alloy

FITTINGS & ACCESSORIES

ORNAMENTAL TILE

Club Tiles

HIP PRODUCTS

Universal Bonnet Hip
Third Round Hip
Baby Ridge
Rapid Hip

VALLEY PRODUCTS


Universal Valley Tile
125 GRP Valley
Dry Valley

RIDGE PRODUCTS

Half Round Ridge
Half Round Monoridge

VENTILATION SYSTEMS

RedVent EavesVent
RedVent 25 Over-Fascia Vent
Top Edge Abutment Ventilation
DryVent Ridge
Rapid Vented Ridge
Uni-Vent Rapid Ridge/Hip
DryVent Monoridge
RedLine Ventilation Tile
Rapid Roof Vent
8.8k ThruVent Tile

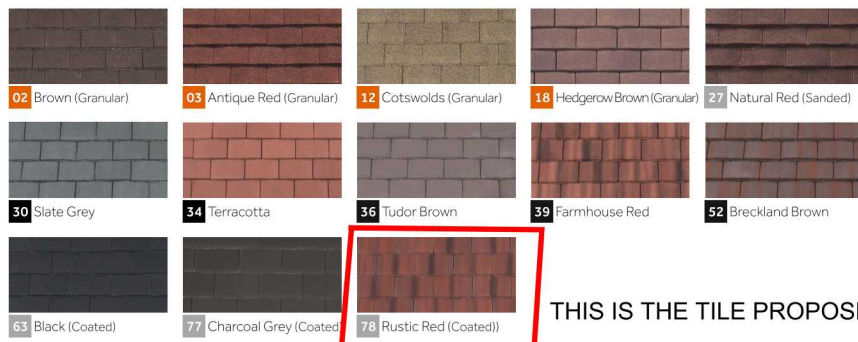

THIS IS THE TILE PROPOSED



Plain Tile

Product Codes

TILES

Standard Tile	6151
Eaves/Top Tile	6154
Tile-and-a-half	6159

UNDERLAYS

Spirtech 400 2S underlay	9202
Divoroll Elite 25	9157
Divoroll Universal 25	9156

EAVES PRODUCTS

RedVent EavesVent 350-450mm (6m)	9189
RedVent EavesVent 450-600mm (6m)	9190
Extension Trays 350-450mm (6m)	9498
Extension Trays 450-600mm (6m)	9499
Rapid EavesVent 2-in-1 Tray	9988
Rapid EavesVent Rafter Roll (6m)	9984
RedVent 25 Over-Fascia Vent (6m)	9593
Underlay Support Tray (1.5m)	9076

HIP PRODUCTS

Continuous Hip (5m)	9502
Third Round Hip/Ridge Junction	9521
Uni-Vent Rapid Ridge/Hip (10m)	9313
Uni-Vent Rapid Hip Support Tray (1.2m)	9069
Third Round Hip (without nail holes)	8122
Third Round Hip (with nail holes)	7411
Hip Iron	9258
Third Round Block-End Hip	7784
Mortar Bedded Fixing Kit	9314
Mortar Bedded Fixing Kit	9314

VALLEY PRODUCTS

125 GRP Valley (3m)	9595
Dry Valley (3m) (Low Profile)	9575
Universal Valley Trough Tile	7175

ABUTMENT PRODUCTS

Wakaflex Rapid Flashing	
Top Edge Abutment Ventilation Pack(3m)	9548
Bonding Gutter (High Profile) (3m)	9578

RIDGE PRODUCTS

DryVent Ridge (1.8m)	9058
Uni-Vent Rapid Ridge/Hip (10m)	9313
Continuous Ridge (5m)	9302
Ridge Vent Terminal	7253
Ridge Vent Terminal Adaptor	9175
Flexible Pipe (100 to 100mm)	9172
Gas Flue Ridge Terminal	7241
Gas Flue Ridge Terminals Extension Adaptor	9143
Gas Flue Blanking Plates	9099
Half Round Ridge	8101
DryVent Monoridge (2.7m)	9084
Half Round Monoridge	7203
Mortar Bedded Fixing Kit	9314

VENTILATION TILES

RedLine Plain Tile Vent	9119
RedLine Vent Adaptor	9175
4.5k ThruVent Tile	7347
ThruVent Flexible Pipe (75 to 100mm)	9188
Rapid Roof Vent	9128
Rapid Roof Vent Adaptor	9175
Flexible Pipe (100 to 100mm)	9172

EXTERNAL VERTICAL ANGLES

External Angle 90° LH	8134
External Angle 90° RH	8135
External Angle 135° LH	7142
External Angle 135° RH	7143
Eaves Clip Nail (812)	9338

FIXING

Tile Nail (1596)	9331
Top Tile Clip	9282
Kro-Clip (50)	9142

