
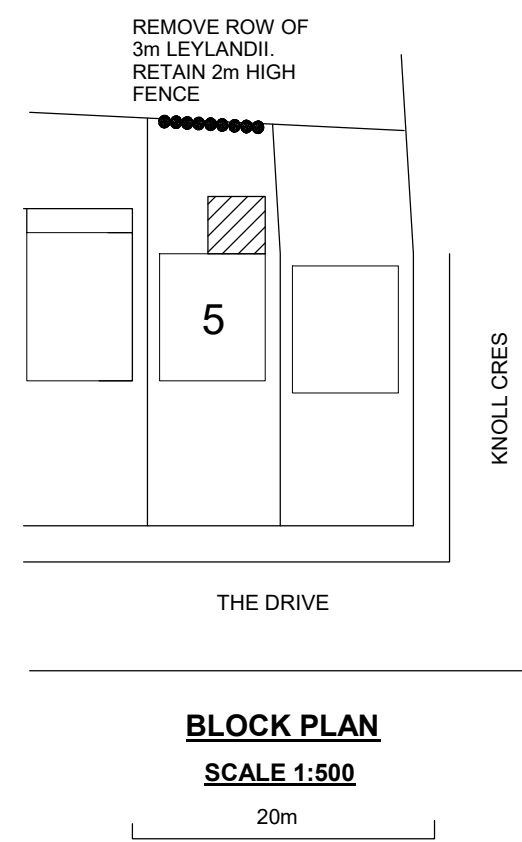
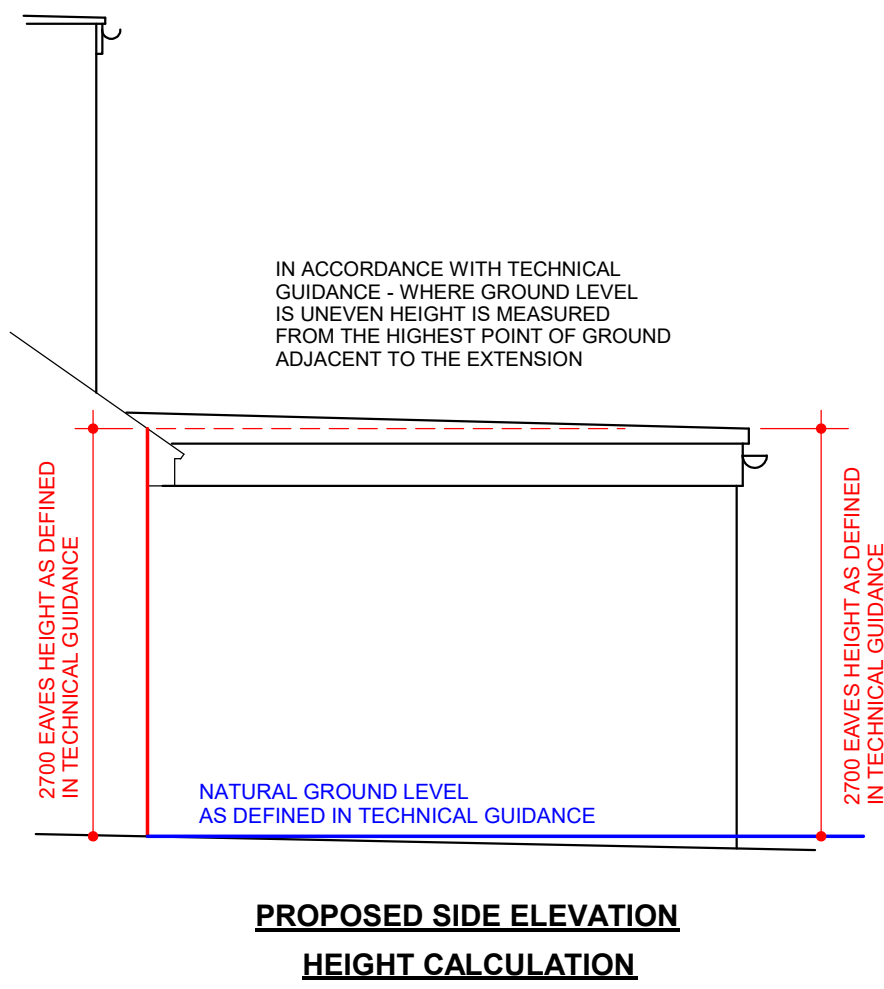
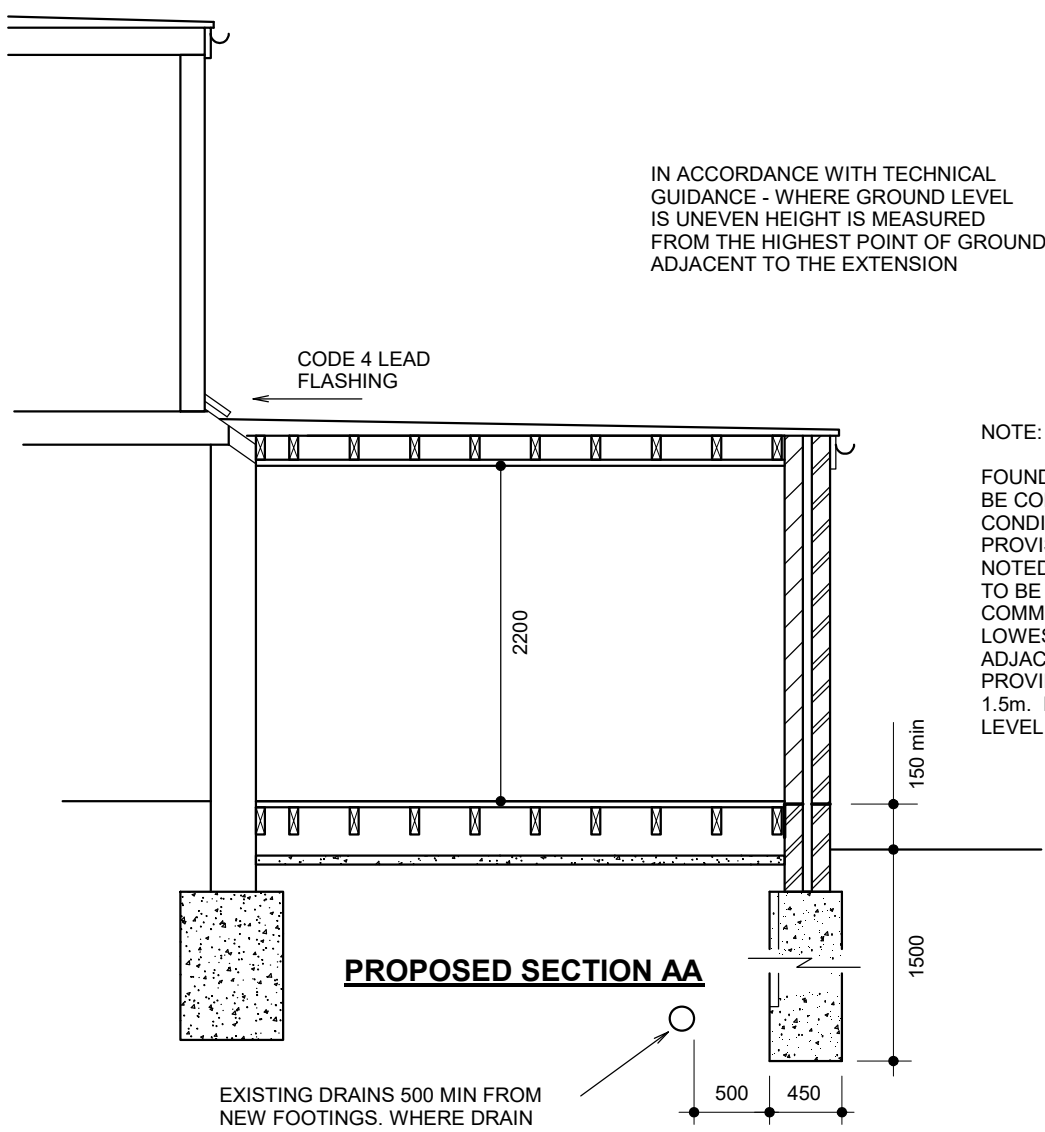
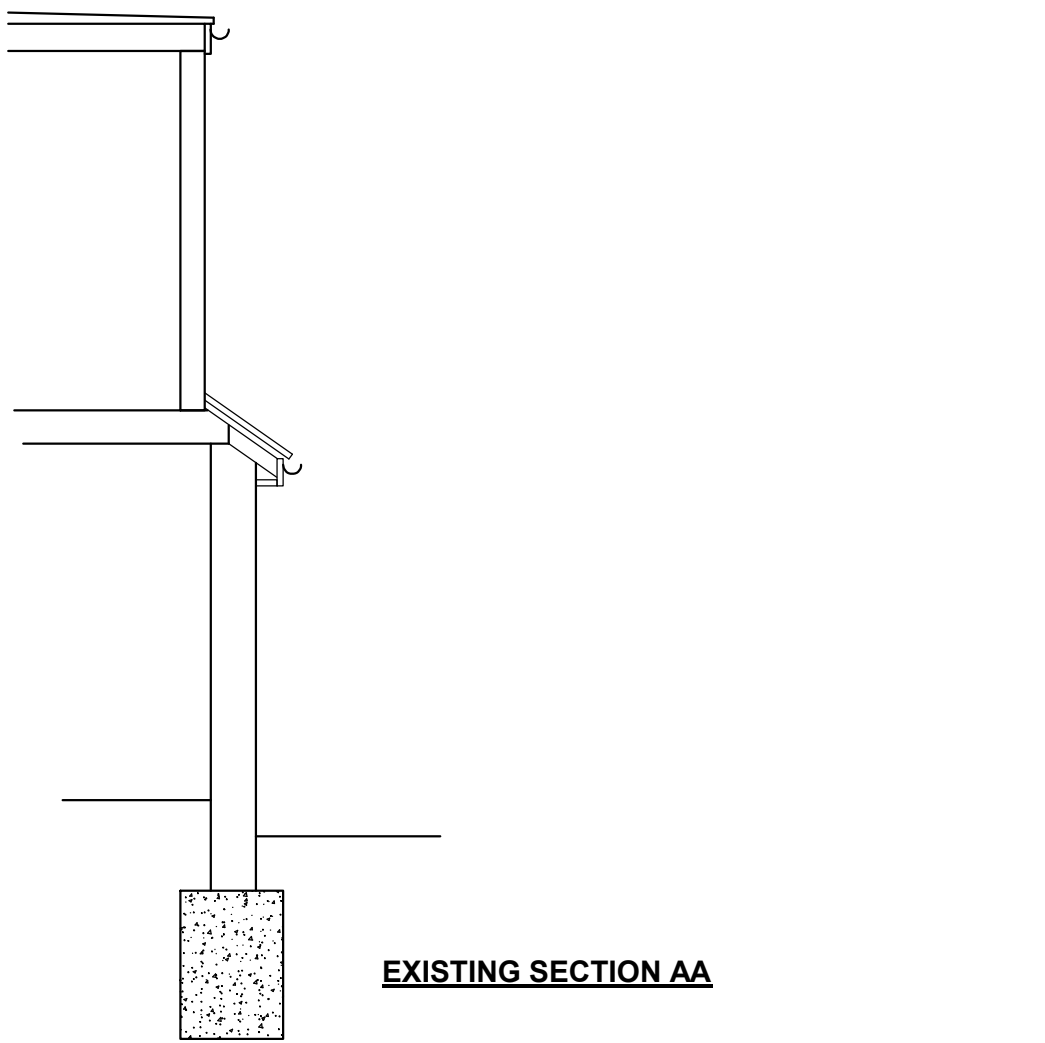


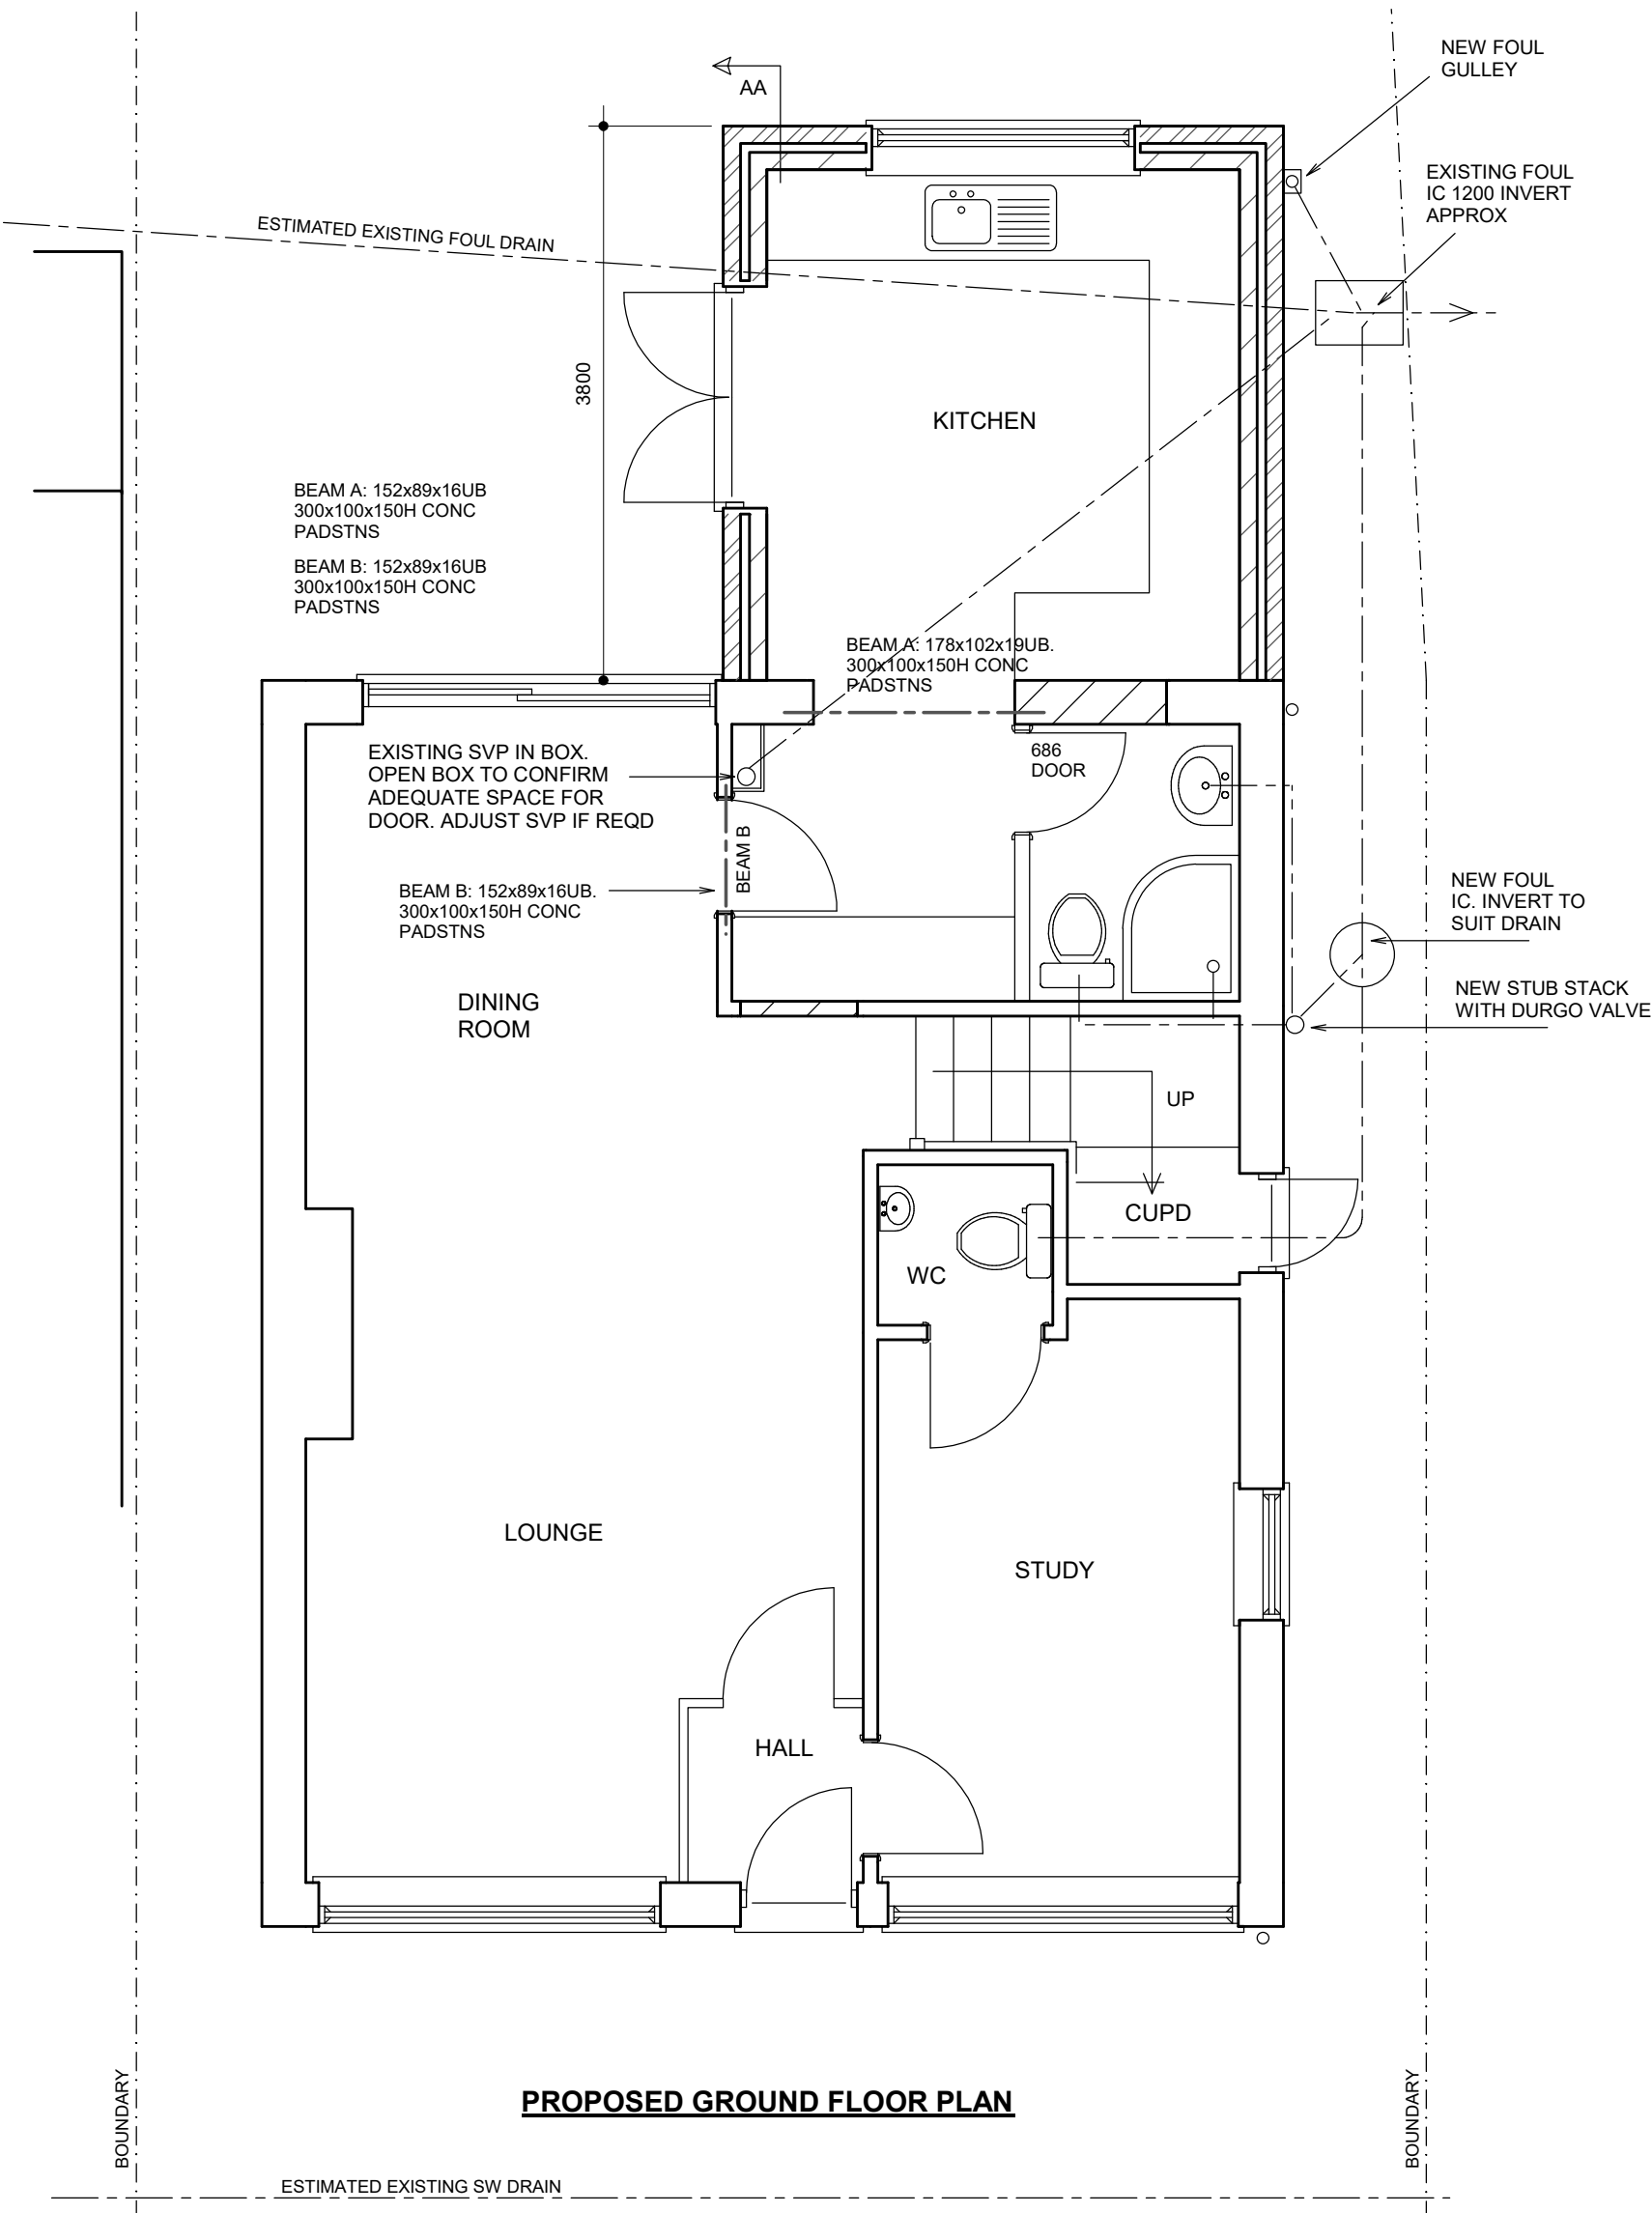

GENERAL SPECIFICATION (unless noted otherwise on drawings or engineer's design)

FOUNDATIONS

Concrete deep strip 30 N/mm² strength sulphate resisting cement. Depth & width provisionally as plan but final depth & width to be agreed on site with building inspector. Drains running through foundations or under new walls to have 150 RC lintel over & 50 clearance. Foundations exceeding 1500 deep to have 75 claymaster to inside face kept 500 from bottom of excavation. Any eccentrically loaded foundation to be 600mm wide with the outer face of wall 60 from foundation edge.

GROUND FLOOR – SUSPENDED TIMBER CONSTRUCTION

50 lean mix concrete oversite on lapped 1200 gauge DPM. Top of oversite to be at or above external ground level to all sides of extension. 150 void (increase void to 300 if high shrink soil). 200x50 C16 timber joists at 400 cts on steel joist hangers. 18mm moisture resistant T&G particle board. 100 Celotex GA4000 insulation slab between joists held in position with chicken wire under screwed to joists. DPC to be below line of floor joists. Plastic airbricks at 1800 cts to perimeter of extension to ventilate void.

EXTERNAL CAVITY WALLS WITH FACING BRICK OUTER SKIN

Cavity wall of 100 Celcon Standard lightweight block (K=0.15 W/m²K) inner skin. 102 facing brick outer skin to match existing outer skin. Class B engineering brick below DPC to both skins. 95 cavity with 85 Knauf DriTherm-32 full fill insulation to achieve U-value of 0.28W/m²K. Fill cavity with weak mix concrete to 225mm below DPC.. Stainless wall ties (225 long) 750 horiz. 450 vert & 300 at reveals. Join to existing building with furfix movement joint. DPC to BS743 lapped to existing. Mortar mix 1:1:6. Sulphate resisting cement to be used on all work below DPC. Cavity reveals to be closed with Thermabate insulated cavity closers. Lightweight Gypsum plaster internally - 11 Thistle Bonding Coat + 3 Thistle multi finish skim. Window and door openings to have Catnic CG90/100 lintels. 150 min bearings.

STEELWORK

Beams to be clad with 12.5 fireline plasterboard + skim to provide 30 min fire resistance. Alternatively steelwork to be painted with intumescent paint by suitably trained person to approval of building inspector on site.

INTERNAL PARTITIONS

75x50 timber stud. Lay DPC under sole plates where on concrete ground floor. All partitions to contain 75 acoustic quilt. Clad shower room partitions with 12.5 soundblock + 3 skim each side.

FLAT ROOF (COLD DECK CONSTRUCTION)

150x50 C24 joists at 400 cts on steel joist hangers. 5x30 MS anchor straps at 2000 max cts. 18 WBP plywood fired to fall min 1 in 40. 3 layers roof felt to BS747 hot bonded to ply decking. Finish with bitumen bedded stone chippings covering the whole surface to a depth of 12.5mm. 100mm Celotex GA4000 insulation slab between joists with 50 ventilation gap over. 45 Celotex TB4000 below joists. Ceiling 9 plasterboard & 3 skim. 25 continuous vent at eaves both sides to allow cross ventilation. Roof to achieve U-value of 0.18W/m²K.

VENTILATION

Windows/doors to match existing & provide vent of min 1/20 floor area & built in adjustable 8000mm² min vent. Install power vent to kitchen to achieve 30 litres/sec if over a cooker or 60 litres/sec if elsewhere. Shower room to achieve 15 litres/sec and be connected to light switch with 15 minute overrun. Vent to be ducted at ceiling level to outside air.

DRAINS

Clay 100 dia pipe laid in 150 pea shingle to fall min 1 in 40. Inspection chambers 150 concrete base. Osma preformed IC all to manufacturers spec (only on private non shared drains). Drains shown on drawings are estimated and are to be confirmed on site before any work commences.

SURFACE WATER

112 dia PVC gutters. 68 dia PVC downpipes. Surface water downpipes connected to soakaway minimum 5 metres from any building. Volume of 1 cubic metre per 16.5 square metres of roof area served. Fill with hardcore.

ABUTMENTS

All exterior abutments to have code 4 lead min 150 flashing let into brickwork or blockwork.

WINDOWS & DOORS

Double glazed with 16 air gap and soft low E coating. Built in 8000mm² adjustable vent. All windows to achieve minimum U value of 1.6 w/m²K. All doors to achieve minimum U value of 1.8 w/m²K. All glass below 800mm and glass in doors or within 300mm of a door to be toughened safety glass.

ABOVE GROUND DRAINAGE AND PLUMBING

Sink & shower to have 40 dia waste. Basin to have 32 dia waste. All with 75 D/S traps & rodding access at bends. Long & combination wastes 50 dia. WC with low flush cistern & 110 dia waste. Plumbing to comply with British Standards. Air admittance valves (Durgo Valve) to be installed above level of highest fitting that it serves. Wholesome water (ie water provided by statutory water supplier via a compliant water supply installation) to be provided to all taps. Showers to be thermostatically controlled to ensure water does not exceed 48 degrees C

ELECTRICAL WORK

All electrical work required to meet the requirements of Part P (Electrical Safety). Must be designed, installed, inspected & tested by a person competent to do so. Prior to completion the council should be satisfied the Part P has been complied with. This may require an appropriate BS7671 electrical installation certificate to be issued for the work by a person competent to do so. New light fittings to have LED bulbs. Electrical switches and sockets to be installed between 450mm and 1200mm from floor level where practical.

HEATING

All new radiators to be fitted with thermostatic valves. All work to gas pipework, boilers & appliances to be carried out, tested and certified by Gas Safe registered person.

5 THE DRIVE NORTHWOOD MIDDX HA6 1HQ

SINGLE STOREY EXTENSION

© COPYRIGHT JAMES RUSH ASSOCIATES LTD

JAMES RUSH ASSOCIATES LTD

54 JOINERS LANE CHALFONT ST PETER
BUCKINGHAMSHIRE SL9 0AT TEL: 01923 775 761
EMAIL: jamesrush@hotmail.com

SCALE 1:50 / 1:100 @ A1

JAN 2021

DRG No. 2184.2 REV A

BOUNDARIES ESTIMATED AND TO BE CONFIRMED ON SITE. ALL NEW WORKS TO BE CONTAINED WITHIN TRUE BOUNDARIES UNLESS STATED OTHERWISE ON PLAN. ALL NEW WORK TO COMPLY WITH CURRENT BUILDING REGULATIONS. DIMENSIONS IN MILLIMETRES AND TO BE CONFIRMED ON SITE. ALL STEEL DIMENSIONS TO BE CONFIRMED ON SITE AND NOT BE TAKEN FROM STRUCTURAL CALCULATIONS. ALL DRAINS & TREES ARE ESTIMATED AND ARE TO BE CHECKED & CONFIRMED ON SITE BEFORE ANY WORK COMMENCES. CLIENT TO SERVE PARTY WALL ACT NOTICE BEFORE WORK COMMENCES. ALL WORK TO BE CARRIED OUT & SUPERVISED BY COMPETENT OPERATIVES. DUE TO SURVEY LIMITATIONS EXISTING JOIST SPANS ASSUMED UNTIL CONFIRMED ON SITE. ALL WALLS & PARTITIONS TO BE CONSIDERED LOBBEARING UNTIL OPENED UP ON SITE AND CHECKED BY COMPETENT PERSON TO CONFIRM OTHERWISE. MUST BE CONFIRMED BEFORE ANY WORK COMMENCES. IF STRUCTURAL ENGINEERS DESIGN RELATING TO STRUCTURAL ELEMENTS CONTRADICTS ARCHITECTURAL DRAWINGS SPEC - ENGINEERS DESIGN PREVAILS. THIS DRAWING IS FOR PLANNING & BUILDING REGULATION APPLICATION PURPOSES ONLY. BUILDER/CLIENT TO APPOINT CDM CONSULTANT TO ENSURE WORKS COMPLY WITH CDM REGULATIONS BEFORE WORK COMMENCES. SINCE WE HAVE NO ACCESS TO THE DEEDS OF THE PROPERTY IT IS THE RESPONSIBILITY OF THE CLIENT TO ENSURE THAT THE WORKS DO NOT CONTRAVENE ANY RESTRICTIVE COVENANTS CONTAINED IN THE DEEDS.

10.00 METRES @ 1:100

5.00 METRES @ 1:50