


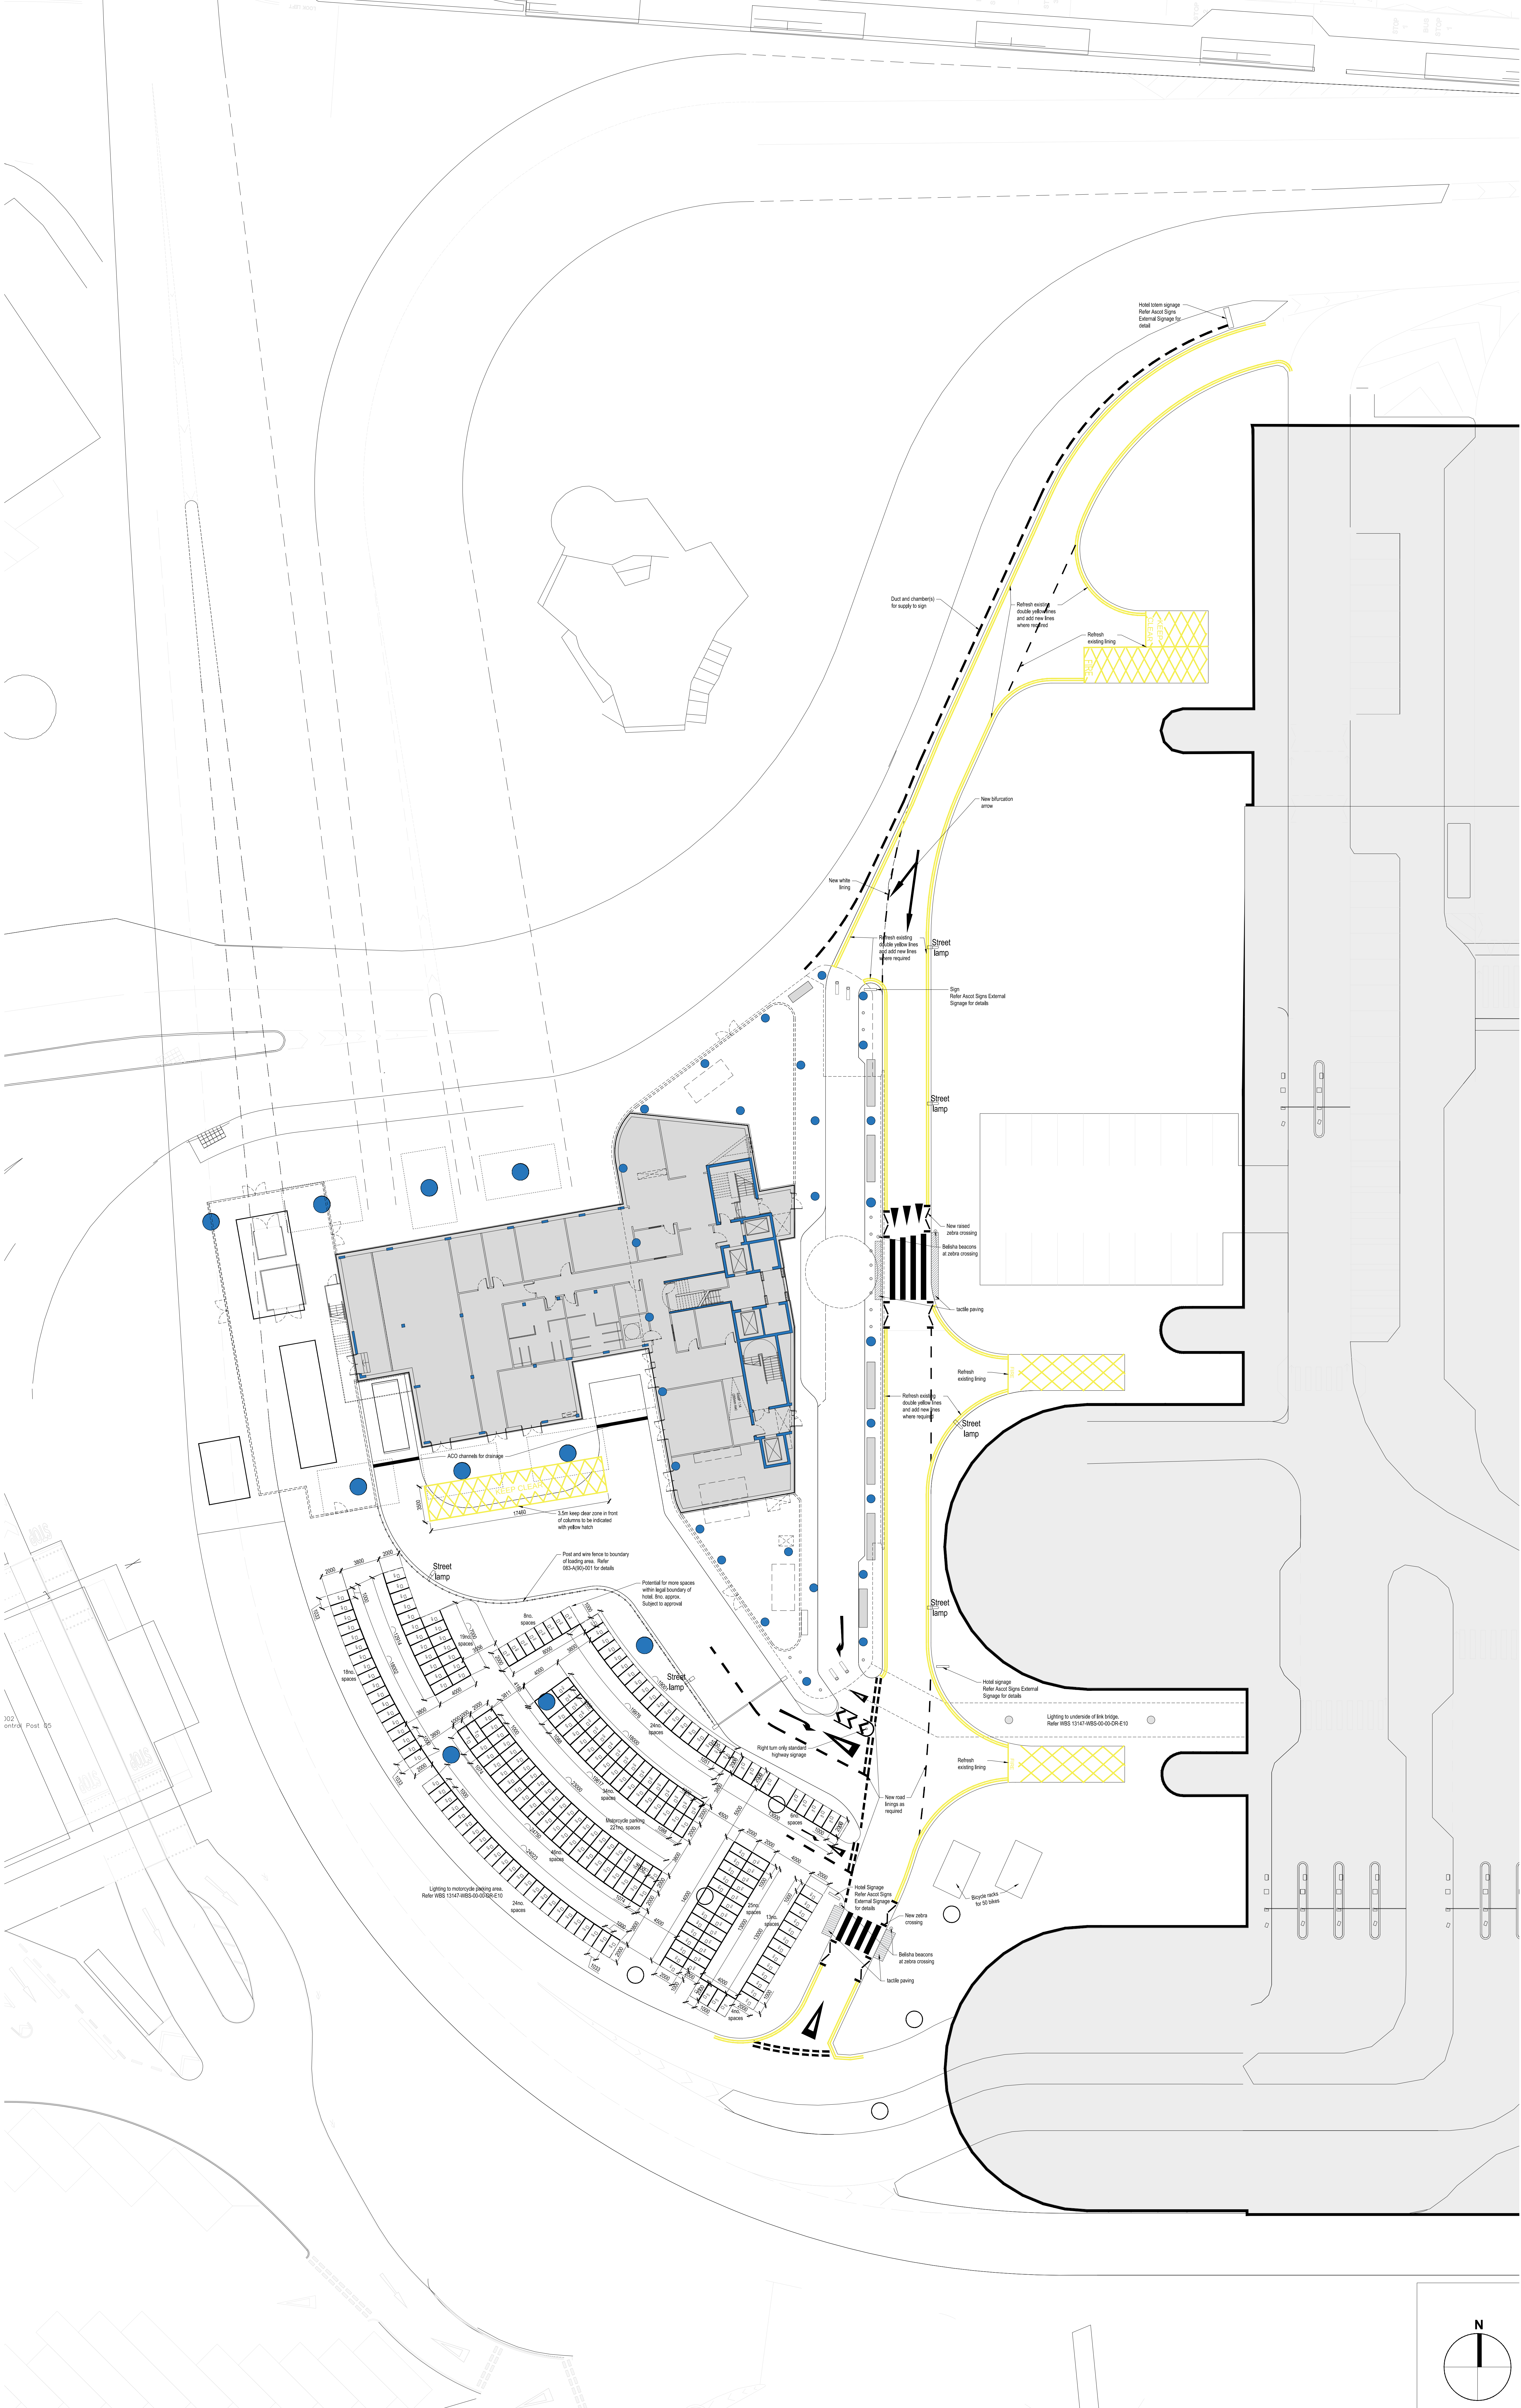

NB:
For layout showing landscaping / street furniture see drawing 083-L(90)-201
For layout showing external fire strategy and muster point see drawing 083-L(90)-203

21mm Motor Cycle Anchors Group: BSMMVM50-50C To be installed as per manufacturer's guidelines.

While the specification All lines for railings, parking bays, hatching & symbols in white, all to be Hot Applied Thermoplastic in accordance with BS EN 1871.

All surfaces that lining is being applied to are to be dry & not below 5°C in temperature, they are to be fully cleaned with a wire brush to remove any curing compound & prepared with a tack coat compatible with the surface & the thermoplastic. Tack coat to be the same width as the line being applied.

NB: Existing Site details are based on combined information from survey drawings by Cat Surveys Group Ltd. drawing 'GDL15193-UUD-R0', 10000-xx-m3-911-000001 (Buried Services Survey) and HAL Survey Drawing 'Heathrow_combined_utilities'

metres
0 1 2 3 4 5 10

UNUM PARTNERSHIP
CHARTERED ARCHITECTS

PRELIMINARY

Client				
Grove Developments				
Project Title				
Proposed Hotel at T2 Heathrow				
Drawing Title				
External Works; White lining/street lighting/signage				
Date	Scale	Drawn	Checked	A0
Jan18	1:200	EB/GB	EB	
Drawing No.				Rev
083-L(90)-202				P5