


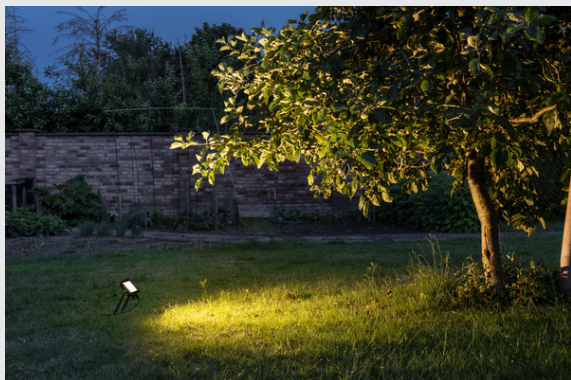

FLOODI M

anthracite / transparent wall and ceiling-mounted light,
30W 3000K 100°

High-output FLOODI spotlight for effective illumination of areas and squares. The swivelling mounting bracket and IP65 protection make the spotlight suitable for outdoor mounting on walls and ceilings. The spotlight is connected electrically through the existing cable connector on the casing itself.

TECHNICAL DATA

Item no.	1006192
Rotating or tilting	tiltable
IP Code	IP 65
Impact resistance class	IK 06
Impact resistance	1 Joule
Assembly	Surface
Assembly details	Ceiling, Wall
Primary nominal voltage	220-240V ~50/60Hz
Safety class	I
Wattage	30 W
Minimum ambient temperature	-30 °C
Maximum ambient temperature	35 °C
Stroboscopic effect (SVM)	0.04
Lumen	2980 lm
Colour temperature	3000 Kelvin
Beam angle	100 °
Color	anthracite
CRI	80
LXXBXX data	L70B50
Service life	50000 h
Length	16 cm
Width	2.8 cm

Light Source

954804	
--------	---

Accessories

1006326	Sensor for FLOODI
---------	-------------------

Height	22.3 cm
Net weight	0.542 kg
Gross weight	0.698 kg
BIG WHITE Page	691