



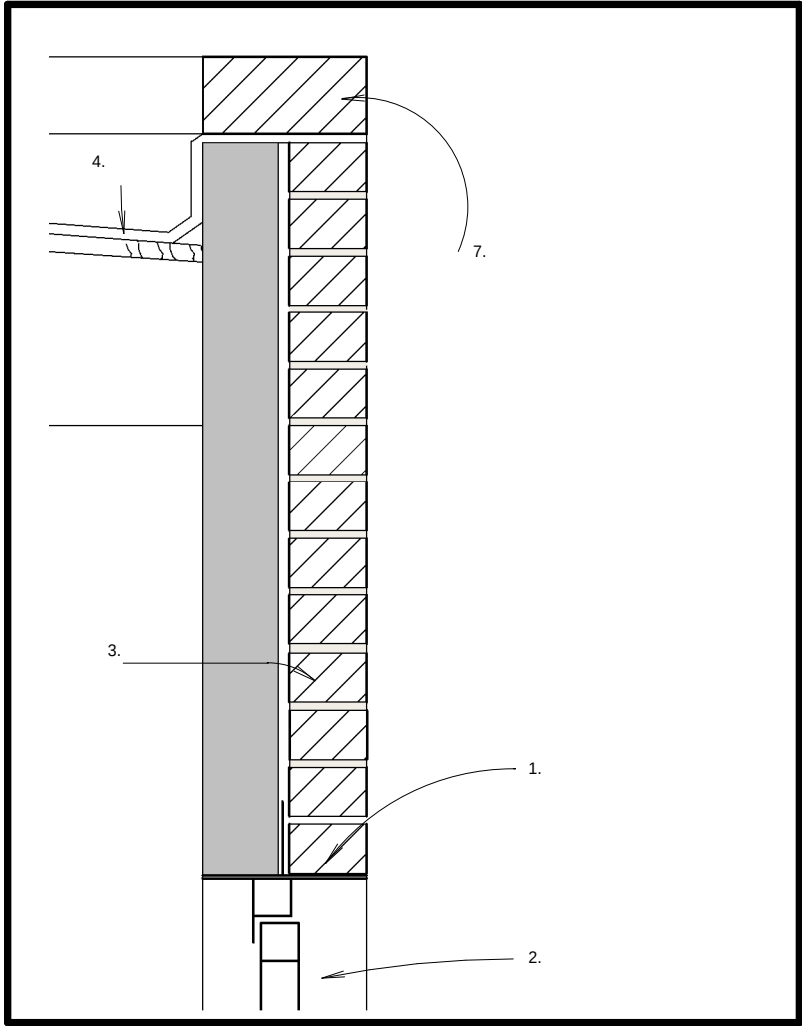

Cross section bike store - door

1 : 10

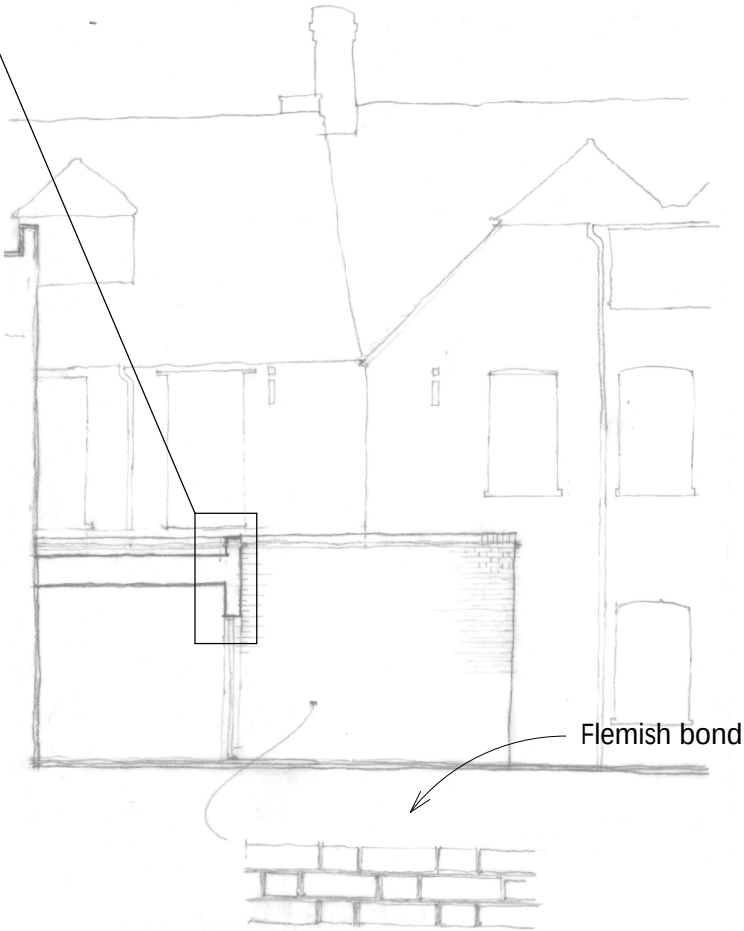

KEY

- 1. Key STone lintel 2700mm long, SW/K 100 painted in RAL 7024 colour- graphite grey to match garage door
- 2..58mm Hardwood Louvred Door by Russell Timber Technology
Hung in a 57x80mm Laminated Hardwood Frame manufactured from the solid. Incorporating:
- a continuous all round Aquamac 21 weather gasket
- metal security keeps
- 5 Lever Mortice Lock
- 1½ pairs of Heavy Duty Hi-load Lift Off Hinges - Satin Anodised Aluminium (SAA), Gold Anodised Aluminium (GAA) or Chrome Effect
- Standard Handles - SAA, GAA or Chrome
- Low level cill in or out open - Alternative options on request.
- Fully Factory Finished using Standard or RAL/BS Colours to match the rainwater goods -. RAL colour 7024 graphite grey
- 3.100mm brickwork - Smeed Dean Islington Yellow Rustica by Wienerberger and 100mm concrete blocks
- 4. Single ply membrane - Fatrafol FF807- installed as per manufacturers specification, 22mm plywood (fall 1:60), 200x50mm floor joists @ 400 centrs.(as per engineers specification)
- 5. Harmor, Alumasc 90degrees spigot outlet code 390
- 6. Alumasc rainwater goods : spigot welded to round to square adaptor, connected to a special 92.5 degree branch (as per sketch and manufacturers specification) and 75x75mm square flush joint rainwater pipe (Polyester powder coated RAL colour 7024 -graphite grey as specified)
- 7. DPC+ Brick on end coping detail



Bike store detail

1 : 50



Drawn by	Author
Format	A3
Scale	As indicated
Revision	05/11/2015

Land R/O 122/123 High Street, Uxbridge, UB8 1JT

Bike storage

1216 8013A