

KEY TO LANDSCAPE PROPOSALS

Proposed Planting Details & Specification

All areas of new landscaping to have the existing topsoil and subsoil decompacted by hand digging or rotorvator. If any imported topsoil is required it should be placed to a depth of 200mm minimum in grass areas and 350mm minimum in tree and shrub planting areas.

Native Tree Planting

Trees planted in locations indicated as per the following specification:

- Sa

o

**Specimen Tree Planting (15 no.)**

4.5m high, 18-20 cm girth Extra Heavy Standard root balled trees (supplied by Barcham Trees or similar approved) to be pit planted including securing with timber stake to secure the tree in an upright position as per detail below. Planted in locations shown on plan above:

3 x Acer campestre (Field Maple) - Ac  
3 x Alnus glutinosa (Alder) - Ag  
3 x Crataegus monogyna (Hawthorn) - Cm  
3 x Sorbus aucuparia (Mountain Ash) - Sa  
3 x Betula pendula (Silver Birch) - Bp

Shrub Planting of Benefit to Pollinators

Areas of flowering shrub planting for ecological enhancement to encourage pollinators to be planted in groups. Cultivate and grade soil, bring top 150mm to a fine tilth prior to planting the following species with 75mm depth of bark mulch spread between plants:

- Shrubs (120m²)**

Shrubs to be pit planted 4 per m². Planted to provide low maintenance, colourful, groundcover with known ecological benefit as recommended by Natural England. All plants to be 5 litre pot grown stock, planted in random groups of 5, 7 or 9 plants of same species throughout the planting bed.

20% Hebe elliptica  
20% Hypericum calycinum  
20% Viburnum tinus laurustinus  
20% Brachyglottis 'Sunshine'  
20% Lavandula angustifolia

Grass Verges

Areas of new grass. Any bare or damaged areas of existing grass which is to be retained to be re-turfed as follows:

A minimum of 100mm depth of good quality top soil, free of vegetation to be turned over, levelled, lightly consolidated and free from surface stones, other debris and perennial weeds before laying turf (eg Rowlawne Medallion or similar approved) and thoroughly water immediately after and continuously during dry weather until well established.

- New Grass Verges (110m²)**

Grass verges to be grassed with turf laid to the above spec with the following mix, maintained by the home owners:

25% Dwarf perennial ryegrass  
30% Slender creeping red fescue  
45% Strong creeping red fescue
- Hedgerow Understorey Flora Mix (260m²)**

Species selected to encourage butterflies, moths and insects including nectar rich species. HE1 (Hedgerow Mixture) by Emorsgate Seeds (or similar approved) to be sown within the scrubland tree and shrub planting. Mix contains 18 wildflower species including yarrow, agrimony, garlic mustard, etc

Native Hedge Planting

Plants to be pit planted at densities indicated, to provide a dense, compact hedge buffer along the site boundary as follows:

Cultivate and grade hedging bed, bring top 300mm of soil to a fine tilth, including Enmag fertilizer applied and worked into to 100mm, rake and bring to given levels, remove all stones and debris over 50mm, dig planting holes (average 300 x 300 x 300 deep), supply and plant specified shrubs and plants in densities specified, backfill with excavated material as above, water in and mulch with 75mm bark chippings 20-40mm size. Water and weed regularly for 12 months.

- Native Hedge Planting (110 linear metres)**

Trees and shrubs to be pit planted at 5 plants per metre in a double staggered row. Plants to be 125-50cm bareroot nursery stock reduced by 30-50% immediately after planting.

30% Crataegus monogyna (Hawthorn)  
20% Prunus spinosa (Blackthorn)  
10% Acer campestre (Field Maple)  
10% Corylus avellana (Hazle)  
10% Salix caprea (Goat Willow)  
10% Prunus avium (Wild Cherry)  
10% Rosa canina (Dog Rose)

Paving, Hardstanding & Fencing

All areas of hardstanding and paving to be constructed as per Architect/Engineers specifications (see WPL drawings for details)

- Store Entrance**

Area in front of pedestrian entrance to be block paved with natural coloured paving
- Roads, Car Parking and Footways**

Areas of tarmac/adam surfacing
- Tactile Paving**

Tactile paving with blister finish to surface
- Existing Service Yard**

Service yards to be retained
- 600mm high treated timber knee rail
- Secure heras zenith 358 weld mesh panels fence (3m)
- Secure heras zenith 358 weld mesh panels fence (4.2m)



© Encon Associates - DISCLAIMER:

This drawing is copyright and shall not be reproduced nor used for any other purpose without the written permission of Encon Associates. This drawing must be read in conjunction with all other related drawings and documentation. It is the contractors responsibility to ensure full compliance with the relevant Regulations. Until technical approval has been obtained from the relevant Authorities it should be understood that all drawings issued are PRELIMINARY and NOT for Construction. Should the contractor start site work prior to approval been given, it is entirely at his own risk. Do not scale from this drawing, use figured dimensions only. It is the contractors responsibility to check and verify all dimensions on site. Any discrepancies to be reported to Encon Associates immediately. All survey information is provided by the surveying company and Encon Associates cannot accept any liability for any discrepancies there in. All survey information to be verified on site by Contractor. For our Standard Terms and Conditions, please visit [www.enconassociates.co.uk/terms](http://www.enconassociates.co.uk/terms). Alternatively, a hard copy can be posted to you

Notes:

This drawing is based on:

- 9864 - 102C- Proposed Site Plan by WPL
- Pre-app with the LPA who have specifically requested that the Site would benefit from tree planting to the front of the site as a green buffer. The proposed planting should maximise ecological value.

Implementation Programme

All new tree and shrub planting should take place during the dormant planting season ie October to March unless otherwise specified by plant suppliers. Turf is best laid in mid-autumn, but can be laid any time between mid-autumn and early spring, whenever the soil isn't too wet or frosty. In spring and autumn little mowing is needed, so newly laid turf can be left relatively undisturbed for several weeks, which will help it get rooted in.


Maintenance Programme

The general maintenance and management will include 12 visits per year in order to provide the following:

- Comprehensive weed control
- Checking the condition of tree stakes, ties, guards and protective fencing and making repairs or replacing where necessary
- Ensuring that all plants remain firmly in the ground in an upright position
- Watering during periods of dry weather
- Pruning back of damaged/diseased growth
- Topping up of mulches re-apply fertiliser as necessary
- Replacing dead and dying plants
- Keeping planting beds, grass verges and their surroundings tidy and free of litter

Tree Pits & Support

Excavate tree pit to provide 5m³ of rooting volume (2.4m x 2.4m x 0.9m)

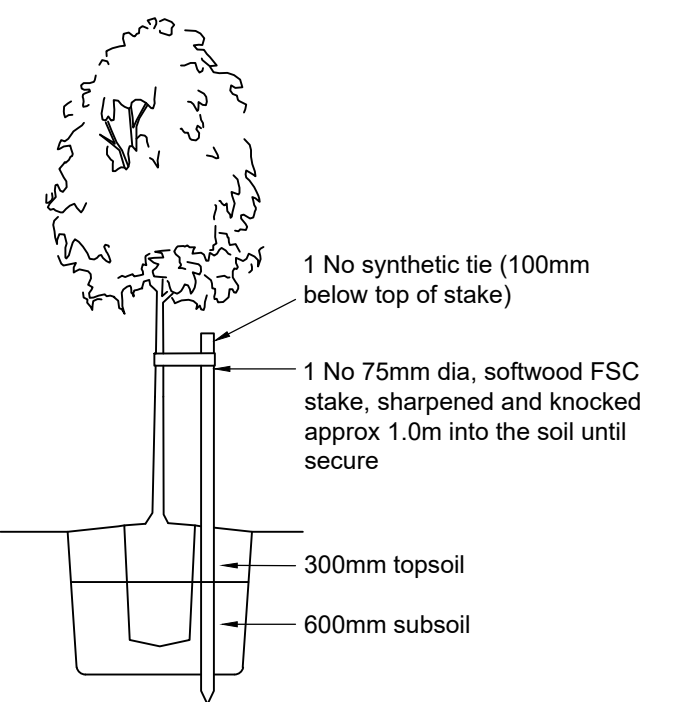

| Rev | Date | Description | Drawn | Checked |
|-----|------|-------------|-------|---------|
|-----|------|-------------|-------|---------|

Client  
TJ Morris

Project  
217 High Street  
Yewlsley  
West Drayton

Title  
Landscaping & Ecological Enhancement Scheme

Drawing Status  
FOR PLANNING APPROVAL

|       |    |         |    |
|-------|----|---------|----|
| Drawn | MB | Checked | LB |
|-------|----|---------|----|

|      |          |            |       |
|------|----------|------------|-------|
| Date | 12.06.23 | Scale (A1) | 1:250 |
|------|----------|------------|-------|

10 Chapel Lane  
Arnold  
Nottingham  
NG5 7DR  
T: 0115 987 55 99 E: [enquiries@enconassociates.co.uk](mailto:enquiries@enconassociates.co.uk) W: [www.enconassociates.co.uk](http://www.enconassociates.co.uk)

Environmental Consultants to the Construction Industry  
BREEAM - Code for Sustainable Homes Assessors - Landscape Architecture - Transportation  
Life Cycle Costing - Energy Assessment - SAP - BPC - SBEM - Daylight Calculations

| Job Number | Drawing Number | Rev |
|------------|----------------|-----|
| A6146      | 01             |     |