




ALDS 65 L40 PC C84 ALDS 65 L40 E3 PC C84

Housing -	IP65 rated white injection moulded GRP body with stainless steel clips, locking screws & poured neoprene gasket
Optic -	Ribbed Polycarbonate Diffuser
Fixing -	Surface mounted or suspended with removable gear tray for ease of maintenance
Electrical - Connection	3 pole terminal block (4pole for E3 version)

Performance Data

System Power -	36.5w
L2B -	123.3 lm/w 114.8 lm/w
Ambient Operating Temp. -	0 to 25°C
Source -	3 x LX4924 X60 C84
Lumen Output -	4500lm (source) 4190lm (luminaire)
Control Gear -	Fixed Output
CCT -	4000K
CRI -	>80
LOR -	93.10%

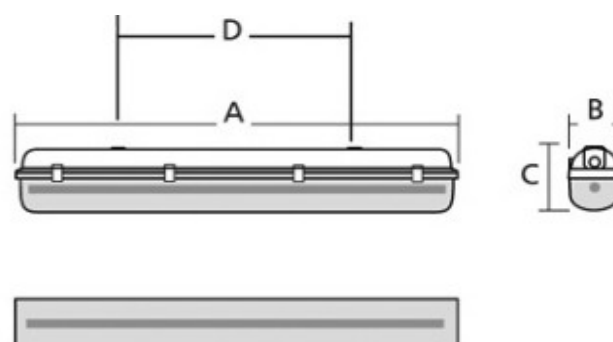

A = 1583mm
B = 111mm
C = 114mm
D = 660mm

