


NOTES

1. All dimensions are to be checked on site prior to the commencement of work and any discrepancy is to be reported to the construction manager before construction.
2. All work is to comply with current Building Regulations and allied legislation.
3. All contractors and sub-contractors must ensure that they have the latest issue of this drawing and details before the commencement of work on site.
4. All materials are to be used and installed in strict compliance with the relevant manufacturers instructions and recommendations.
5. All works on site, managed and implemented as a result of the designs indicated on this drawing, are to be given full consideration for compliance with the Health and Safety (Off) Regulations in respect of design and implementation on site and no works are to be undertaken if it is considered that compliance with the Building Regulations cannot be achieved.
6. All dimensions shown in millimetres.
7. Footprint of buildings shown at 10m above ground level.

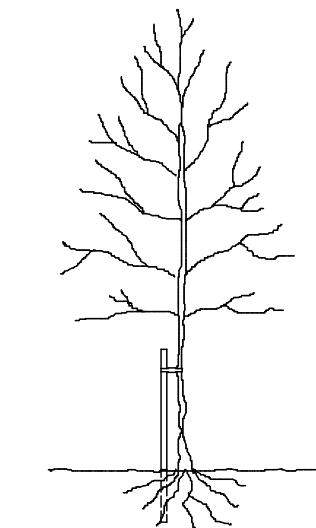

TREE STAKING DETAIL

TREE STAKING SPECIFICATION

For selected standard trees o/a height 3.0-3.5m. Support using stakes extending to 1.0-1.2m above ground and 0.6-0.75m below ground level (depending on ground conditions).

Supported by single non reinforced tie 75mm from top of stake.

Remove stake on onset of or during the second growing season after planting.

LANDSCAPE SPECIFICATION

Landscaping generally to be carried out in accordance with BS.4428. All new trees to be supplied as selected standards unless otherwise noted.

Overall height 3.0-3.5m and 1.8-2.1m, straight stem to BS.3936 Part 1 1992. Trees supplied with bareroots with polythene wrapping or as noted otherwise, and planted in a min of 3.0 litres peat. Planting beds to be excavated and lined with screened topsoil enriched with peat free compost/fertiliser or similar manure 50mm deep, top dressed with 75mm deep forest bark mulch.

Site to be cleared of all builders rubble and rotavated levelled and tilled before planting commences. Front and rear gardens to be turfed, 300mm deep top soil to be applied.

All turfing to BS.3936 1990.

Pernicious weeds are to be treated with translocated herbicide during growing season (spot treated).

Tree and shrub planting to BS.3936 Part 1 1992.

Sub-soil areas below planting to be de-compacted before planting commences.

Tree protection to be carried out in accordance with B.S.5837 2012.

DRIVEWAY SPECIFICATION

Driveway to be finished with permeable concrete pavers, finished with a permeable 6mm joint filled with clean crushed stone.

Below the above you need a laying course of a 50mm depth of 6mm clean crushed stone, followed with a sub-base of a 200mm depth of 20mm clean crushed stone with well defined edges. (depth depending on soil conditions)

Pavers to be finished with compatible edgings.

Crossover to be finished in permeable black tarmac. Construction specification in accordance with local authorities requirements.

LEGEND

Extent of proposed building




Existing trees & planting to be removed



Existing trees & planting to remain




Proposed new trees & shrubs



Grassed areas

l a w n

Permeable concrete pavers



SCHEDULE OF IMPLEMENTATION

Please note ALL new planting is to be implemented between the months of November to March in the first planting season following the completion of works

PROPOSED PLANTING LEGEND

Prunus Autumnalis Rosea - Cherry Tree



Betula Pendula - Silver Birch



Sorbus aucuparia - Mountain Ash



Oxley's Ambassadors Apple Tree



Fagus Sylvatica - Common Beech Hedging



Planted in double rows at 600mm c/c and staggered, height 750-1000mm

BIRD AND BAT BOXES

- Selection of open fronted bird boxes, and song bird boxes to be installed along boundary fences to all plots.
- A variety of insect boxes can be installed in the garden of new dwelling, one box is recommended per property

HARD & SOFT LANDSCAPED AREAS TO FRONTAGE

- * TOTAL AREA OF FRONTAGE EQUATES TO 566 SQ.M
- * TOTAL AREA OF FRONTAGE TO BE SOFT LANDSCAPING EQUATES TO 269 SQ.M
- * POLICY STATES 25% OF THE FRONTAGE (141.5 SQ.M) HAS TO BE SOFT LANDSCAPING, & IN THIS CASE WE EXCEED THIS REQUIREMENT

SITE LAYOUT PLAN - SCALE 1:250

SCALE BAR (m)



C	18/03/2019	Drawing amended in accordance tree officers comments
B	28/01/2019	Paths, bird boxes and insected house introduced.
A	29/08/2017	Driveway amended to retain & protect existing tree

rev:	date:	description:
scale:	1 : 250	A1 date: 08 / 06 / 2017
drawing no:	1272 / P / 11 ^C	drawn: FJ
drawing:	PLANNING PROPOSALS LANDSCAPING LAYOUT	
project:	LAND AT 38-40 DUCKS HILL ROAD, NORTHWOOD, MIDDLESEX, HA6 2SB	
client:	NEWSTONE DEVELOPMENTS LTD	



DUSEK DESIGN ASSOCIATES LTD
ARCHITECTURE + PLANNING

01895 831 103
info@dusek.co.uk
www.dusek.co.uk

print history: Monday, 18 March, 2019 15:46:32

S:\0808\DWG\153-100\1021_38-40 DUCKS HILL ROAD\1021-1024.dwg