



HUSH-BAR PLUS Resilient Bar System

Hush-Bar Plus system has been designed as an advanced resilient bar and clip system used to further optimise acoustic performance by mechanical decoupling and creating a more flexible ceiling, whilst being able to support heavier ceiling boards.

Features

- ✓ Superb acoustic performance
- ✓ Refurbishment and New Build
- ✓ Suitable for suspending up to 50kg/m²
- ✓ Building Regulations Part E (England and Wales), Section 5 (Scotland) and Part G (Northern Ireland)
- ✓ Easy to install


Acoustic Performance

Impact $L'_{nT,w}$ dB	Airborne $D_{nT,w}$ dB	Airborne $D_{nT,w} + C_{tr}$ dB
50	58	52

Results based on Hush-System HF25 Advanced test results incorporating Hush-Bar Plus System

Product Data

Application	Screw fix onto timber/metal ceiling joists
Comprises	Metal bars, metal clips and connecting sleeves
Overall Bar Dimensions	2400mm long x 55mm wide x 25mm deep
Overall Depth	25mm

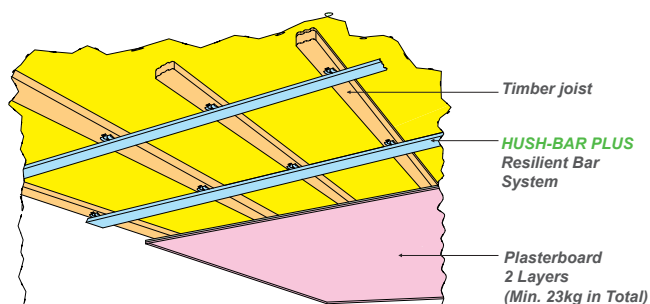


HUSH-BAR PLUS RESILIENT BAR SYSTEM

© HUSH (UK) LIMITED 2007



HUSH-BAR PLUS Example System

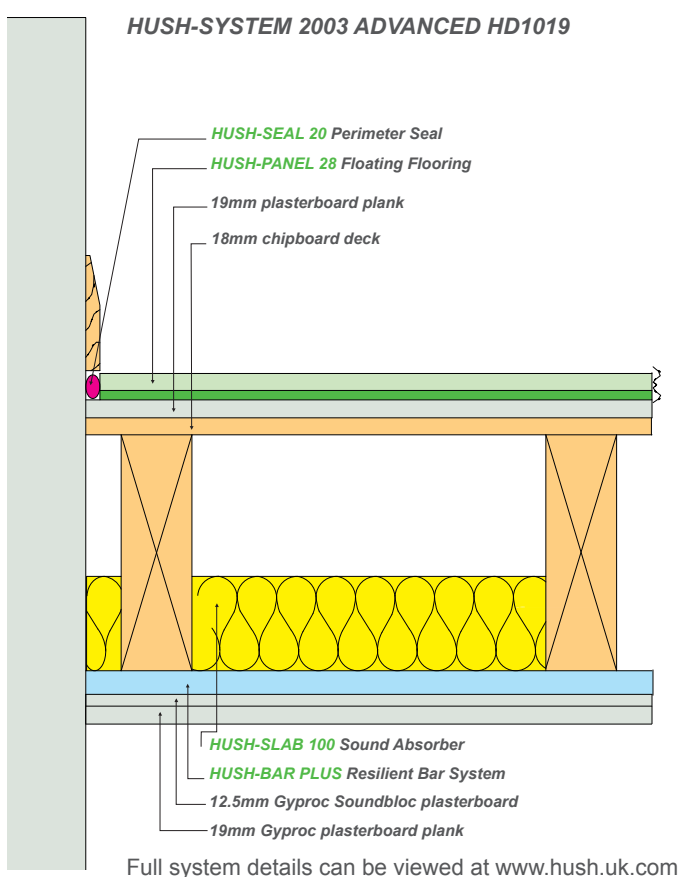

HUSH-BAR PLUS Profile

