


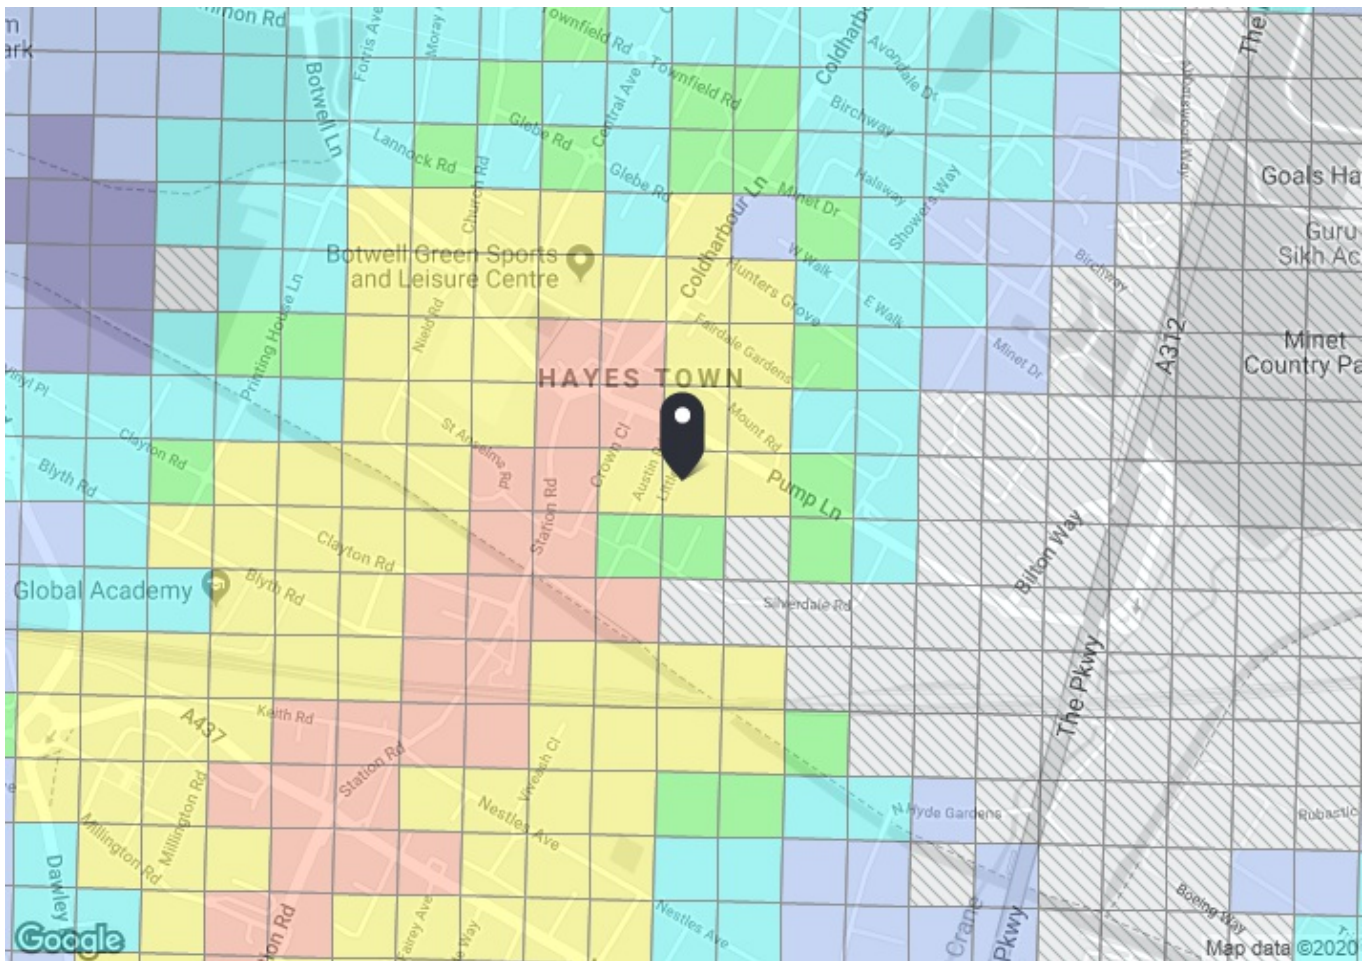

PTAL output for Base Year 4

UB3 3BT
Little Rd, Hayes UB3 3BT, UK
Easting: 510029, Northing: 179740


Grid Cell: 76658

Report generated: 13/01/2020

Calculation Parameters

Day of Week	M-F
Time Period	AM Peak
Walk Speed	4.8 kph
Bus Node Max. Walk Access Time (mins)	8
Bus Reliability Factor	2.0
LU Station Max. Walk Access Time (mins)	12
LU Reliability Factor	0.75
National Rail Station Max. Walk Access Time (mins)	12
National Rail Reliability Factor	0.75

Map key - PTAL



Map layers

 PTAL (cell size: 100m)

Calculation data

Mode	Stop	Route	Distance (metres)	Frequency(vph)	Walk Time (mins)	SWT (mins)	TAT (mins)	EDF	Weight	AI
Bus	HAYES COLDHARBOUR LANE	E6	328.25	6	4.1	7	11.1	2.7	0.5	1.35
Bus	HAYES COLDHARBOUR LANE	90	328.25	6	4.1	7	11.1	2.7	0.5	1.35
Bus	HAYES COLDHARBOUR LANE	140	328.25	8.5	4.1	5.53	9.63	3.11	1	3.11
Bus	HAYES BOTWELL LANE	U5	333.32	5	4.17	8	12.17	2.47	0.5	1.23
Bus	HAYES BOTWELL LANE	H98	333.32	7.5	4.17	6	10.17	2.95	0.5	1.48
Bus	HAYES BOTWELL LANE	195	333.32	5	4.17	8	12.17	2.47	0.5	1.23
Bus	HAYES BOTWELL LANE	U4	333.32	7.5	4.17	6	10.17	2.95	0.5	1.48
Rail	Hayes & Harlington	'PADTON-HTRWAPT 2T18'	722.07	2	9.03	15.75	24.78	1.21	1	1.21
Rail	Hayes & Harlington	'HTRWAPT-PADTON 2Y14'	722.07	2	9.03	15.75	24.78	1.21	0.5	0.61
Rail	Hayes & Harlington	'PADTON-OXFD 2N14'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'PADTON-OXFD 2N16'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'PADTON-OXFD 2N18'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'PADTON-OXFD 2N22'	722.07	0.67	9.03	45.53	54.55	0.55	0.5	0.27
Rail	Hayes & Harlington	'PADTON-OXFD 2N24'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'RDNGSTN-PADTON 2P09'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'OXFD-PADTON 2P11'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'RDNGSTN-PADTON 2P12'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'RDNGSTN-PADTON 2P14'	722.07	1.33	9.03	23.31	32.33	0.93	0.5	0.46
Rail	Hayes & Harlington	'RDNGSTN-PADTON 2P17'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'OXFD-PADTON 2P18'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'BNBR-PADTON 2P20'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'SLOUGH-PADTON 2P25'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'SLOUGH-PADTON 2P32'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'PADTON-RDNGSTN 2R13'	722.07	1.67	9.03	18.71	27.74	1.08	0.5	0.54
Rail	Hayes & Harlington	'PADTON-RDNGSTN 2R19'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15
Rail	Hayes & Harlington	'PADTON-TWYFORD 2R21'	722.07	0.33	9.03	91.66	100.68	0.3	0.5	0.15

Total Grid Cell AI: 16.42