


Crittall specifications:

- Elegant slim profiles
- Hot dipped galvanised steel profiles
- Duralife powder coated frames (RAL to be confirmed)
- Solid steel glazing bars
- Beading: Gaps will be equally spaced with an acceptable tolerance between horizontal and vertical beads of +/- 2mm.
- Crittall patented welded self aligning hinges
- 5 Lever Lock to BS3621, concealed shootbolt to slave doors
- Crittall Allart Handles hinged doors (standard finish to be confirmed)

Glass Specification

- 16mm Krypton Gas filled, Low E, double-glazed units (centre pane U Value 1.2W/m²)
- Toughened Safety Glass to BS6206

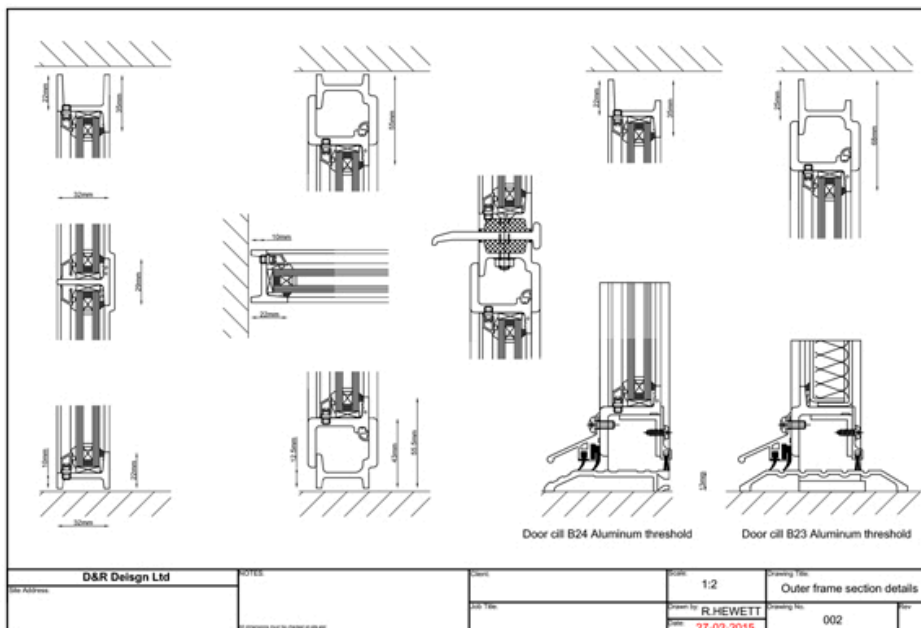

74 Montague Rd Uxbridge UB8 1QN