



Squirrels
Estate,
Viveash Close,
West Drayton

Arboricultural Impact Assessment 2

September
2022

Ref: 21-8770



Quality Standards Control

The signatories below verify that this document has been prepared in accordance with our quality control requirements. These procedures do not affect the content and views expressed by the originator.

This document must only be treated as a draft unless it has been signed by the originators and approved by a director.

Revision	-
Date	21/09/2022
Prepared by	P. Prendergast
Checked by	L. Arez
Authorised by	E. Snape

Limitations

Syntegra Consulting Ltd (“SC”) has prepared this report for the sole use of the client in accordance with the agreement under which our services were performed. No other warranty, expressed or implied, is made as to the professional advice included in this report or any other services provided by SC.

The conclusions and recommendations contained in this report are based upon information provided by others and upon the assumption that all relevant information has been provided by those parties from whom it has been requested and that such information is accurate. Information obtained by SC has not been independently verified by SC, unless otherwise stated in the report.

The methodology adopted and the sources of information used by SC in providing its services are outlined in this report. The work described in this report was undertaken in **September 2022** and is based on the conditions encountered and the information available during the said period of time. The scope of this report and the services are accordingly factually limited by these circumstances.

Where assessments of works or costs identified in this report are made, such assessments are based upon the information available at the time and where appropriate are subject to further investigations or information which may become available.

SC disclaim any undertaking or obligation to advise any person of any change in any matter affecting the report, which may come or be brought to SC’s attention after the date of the report.

Certain statements made in the report that are not historical facts may constitute estimates, projections or other forward-looking statements and even though they are based on reasonable assumptions as of the date of the report, such forward-looking statements by their nature involve risks and uncertainties that could cause actual results to differ materially from the results predicted. SC specifically does not guarantee or warrant any estimate or projections contained in this report.

Costs may vary outside the ranges quoted. Whilst cost estimates are provided for individual issues in this report these are based upon information at the time which can be incomplete. Cost estimates for such issues may therefore vary from those provided. Where costs are supplied, these estimates should be considered in aggregate only. No reliance should be made in relation to any division of aggregate costs, including in relation to any issue, site or other subdivision.

No allowance has been made for changes in prices or exchange rates or changes in any other conditions which may result in price fluctuations in the future. Where assessments of works or costs necessary to achieve compliance have been made, these are based upon measures which, in SC’s experience, could normally be negotiated with the relevant authorities under present legislation and enforcement practice, assuming a pro-active and reasonable approach by site management.

Forecast cost estimates do not include such costs associated with any negotiations, appeals or other non-technical actions associated with the agreement on measures to meet the requirements of the authorities, nor are potential business loss and interruption costs considered that may be incurred as part of any technical measures.

Copyright

© This report is the copyright of SC. Any unauthorised reproduction or usage by any person other than the addressee is strictly prohibited.

Contents

1. INSTRUCTIONS AND TERMS OF REFERENCE	7
1.1 INSTRUCTIONS	7
1.2 Arboricultural Implication Assessment (AIA).....	7
1.3 PHASE 1, 2 & 3: ARBORICULTURAL IMPLICATION ASSESSMENTS (AIA) IN CONTEXT.....	7
1.3.1 Phase 1 (AIA1)	7
1.3.2 Phase 2 (AIA2)	7
1.3.3 Phase 3 (AIA3)	8
1.3.4 Phases 1–3 are in line with BS:5837	8
1.4 TREES & BUILDING SUBSIDENCE/HEAVE ISSUES	8
1.5 TREE SAFETY MATTERS AND TREE RISK ASSESSMENT	8
1.6 SITE OBSERVATIONS	8
1.7 CAVEATS	9
2. INTRODUCTION.....	9
2.1 THE ASSESSMENT METHODOLOGY	9
2.2 ARBORICULTURAL IMPACT ASSESSMENT (AIA 1).....	10
3. CONSTRUCTION EXCLUSION ZONES (CEZS)	10
3.1 GENERAL.....	10
3.1.1 CEZ 1: ROOT PROTECTION AREA (RPA)	10
3.1.2 CEZ 2: TREE CROWN PROTECTION ZONE	11
3.1.3 CEZ 3: TREE DOMINANCE ZONE	11
3.1.4 CEZ 4: NEW PLANTING ZONE	11
4. STATUTORY CONTROLS	12
4.1 PLANNING LEGISLATION (TREES)	12
4.1.1 STATUTORY TREE PROTECTION	12
4.1.2 TREES ON SITE	12
4.2 WILDLIFE LEGISLATION.....	12
5. WILDLIFE HABITATS.....	12

6. THE SQUIRRELS ESTATE, VIVEASH CLOSE, WEST DRAYTON TREE REPORT	13
6.1 THE PROPERTY AND THE DEVELOPMENT PROPOSAL	13
6.1.1 Site description:	13
6.1.2 The proposal	14
6.2 TREES ON-SITE.....	14
6.3 TREES OFF-SITE	18
6.4 IMPACT PROPOSAL ON TREES.....	18
6.4.1 Underground Utilities.....	18
6.4.2 CEZ 1: Root Protection Areas (RPAs).....	18
6.4.2.1 Footprint of the Proposed Build	18
6.4.3 CEZ 2: Tree Crown Protection Zones	18
6.4.4 CEZ 3: Tree Dominance Zones	18
6.5 UNDERGROUND UTILITIES	18
6.6 TREE PROTECTION DURING CONSTRUCTION	18
6.6.1 Tree Protection	18
6.6.2 The Root Protection Area (RPA)	18
6.7 ARBORICULTURAL METHOD STATEMENT	19
6.7.1 Purpose & Use	19
6.7.2 Site Supervision	19
6.7.3 AMS Adoption	19
7. CONCLUSIONS.....	20
7.1 DEVELOPMENT PROPOSAL & POTENTIAL IMPACT ON TREES	20
8. RECOMMENDATIONS	20
8.1 EXECUTION OF CONTRACT	20
8.2 PROPOSED REVISIONS TO THE SCHEME.....	20
9. OCCUPIERS LIABILITY ACTS	20

APPENDICES

APPENDIX 1

APPENDIX 2

1. INSTRUCTIONS AND TERMS OF REFERENCE

1.1 INSTRUCTIONS

1.2 Arboricultural Implication Assessment (AIA).

We are instructed by Syntegra of the subject property at The Squirrels Estate, Viveash Close, West Drayton to:

- Survey from ground level, individually, or in groups, all on-site trees, identifying species, physiological condition and structural morphology, tree dimensions, preliminary management recommendations and BS: 5837 (2012) 'Retention Categories'. Estimate as far as possible off-site trees.
- Number all trees, either individually or in groups:
- Prepare a Tree Schedule.
- Work up an arboricultural impact assessment that will incorporate Root Protection Areas (RPA) for those trees worthy of retention.

1.3 PHASE 1, 2 & 3: ARBORICULTURAL IMPLICATION ASSESSMENTS (AIA) IN CONTEXT

1.3.1 Phase 1 (AIA1)

The initial stage for trees within the development process is a survey of those trees that should be retained and those that may/should be removed. Retention trees are allocated Root Protection Areas (RPAs) that are then detailed on a Tree Constraints Plan (TCP). The RPAs provide for sufficient rooting (soil) volume to ensure that trees are successfully retained during and after the completed development. The TCP represents Phase 1 of an Arboricultural Implications Assessment (AIA1). It indicates a notional development footprint for any given site but moreover, it ***may affect the value of land*** earmarked for development. The AIA1 is ***only*** a baseline survey. It is not intended to represent, in isolation, the supporting information for an LPA* application: to obtain full planning permission.

1.3.2 Phase 2 (AIA2)

The next stage is for 'site layout master planners' to factor the tree constraints into draft layout proposals. This draft is then referred to the consulting Arborist for further implication assessment, to arrive at a 'best fit' scheme, which achieves site proposal viability whilst allowing for the retention of appropriate trees. This layout review represents Phase 2 of an Arboricultural Implications Assessment (AIA2). Once it has been agreed, the consulting Arborist can then prepare a supporting report to accompany the planning application. This report should demonstrate that the trees have been properly considered such that the site layout is defensible in arboricultural terms, both at the application stage and also, if necessary, at Appeal. As the proposal develops, the AIA2 also involves the consulting Arborist working as part of the development team to secure discharge of any initial (frequently pre-commencement) tree related LPA Planning Conditions. These will need to be formally discharged to avoid any breach of Conditions and possible enforcement action.

1.3.3 Phase 3 (AIA3)

All the effort put into the pre-application phases (AIA1-2) to protect retention trees is likely to fail without effective site supervision. Arboricultural Implications Assessment (AIA3) covers the on-site project implementation, including arranging (LPA) approved tree removal/ pruning, overseeing the installation of tree protection fencing, ground protection and any special engineering works through to periodic reporting on the retention of tree protection measures. Many if not all of the latter are usually specified as LPA Planning Conditions that need to be formally discharged. All personnel associated with the construction process must be familiar with the specified Tree Protection Plans (TPP) and Arboricultural Method Statements (AMS) that affect the site. The TPP and AMS should be retained on site at all times and they should be included in the site's Project Management Plan.

1.3.4 Phases 1–3 are in line with BS:5837

'Trees in relation to design, demolition and construction - Recommendations' (2012).

* Local Planning Authority

1.4 TREES & BUILDING SUBSIDENCE/HEAVE ISSUES

Assessing the potential influence of trees upon load-bearing soils beneath existing and proposed structures, resulting from water abstraction by trees on shrinkable soils, was not included in the contract brief and is not, therefore, considered in any detail in this report. We cannot be held responsible for damage arising from soil shrinkage or heave issues related to the retention or removal of trees on site.

1.5 TREE SAFETY MATTERS AND TREE RISK ASSESSMENT

The BS:5837 tree survey is carried out in sufficient detail to gather data for and to inform the current project. Our appraisal of the structural integrity of trees on the site is of a preliminary nature and sufficient only to inform the current project. The tree assessment is carried out from ground level – as is appropriate for this type of survey - without invasive investigation. The disclosure of hidden tree defects cannot therefore be expected. Whilst the survey is not specifically commissioned to report on matters of tree safety, we report obvious visual defects that are significant in relation to the existing and proposed land use.

Lastly and to further clarify, this BS:5837 survey does not constitute a full Visual Tree Assessment (= TRAM* Level 2 - Basis Assessment) that would ordinarily be carried out for Tree Risk Assessment reporting. In effect, this BS:5837 survey equates to a TRAM Level 1 Limited Visual Assessment.

* "Tree Risk Assessment Manual" Dunster, Julian A., E. Thomas Smiley, Nelda Matheny, and Sharon Lilly (2013) International Society of Arboriculture

1.6 SITE OBSERVATIONS

This report has been based on my site observations and in light of my experience.

1.7 CAVEATS

The author does not have formal qualifications in the areas of structural engineering or law. However, making comment on such matters from an arboricultural perspective is both within the normal scope of our instructions and also within the range of the author's experience. Notwithstanding this, specialist professional advice should be sought to clarify/confirm any observations on engineering or legal matters that this report may contain.

2. INTRODUCTION

2.1 THE ASSESSMENT METHODOLOGY

The British Standard 5837 'Trees in relation to design, demolition, construction - Recommendations' (2012) provides "guidance on the principles to be applied to achieve a satisfactory juxtaposition of trees.....with structures". The Standard recommends that trees with categories A-C (where A is the highest quality) are a material consideration in the development process. Such trees may then become a constraint for a planning proposal. Category U trees are those that will not be expected to exist for long enough to justify their consideration in the planning process (i.e. no more than 10 years). Tree categories are used with the number 1, 2, or 3 to signify whether the category was made based on arboricultural, landscape or cultural (including conservation) values respectively. The tree categories are shown on plan by colour-coding:

- Category A (green colour-coded): Good examples of their species with an estimated life expectancy of at least 40 years.
- Category B (blue colour-coded): Not suitable for an 'A' category due to impaired condition or a tree lacking special 'A' qualities: with an estimated life expectancy of at least 20 years.
- Category C (grey colour-coded): Unremarkable trees of very limited merit or with a significant impaired condition not warranting an 'A' or 'B' category: with an estimated life expectancy of at least 10 years. See young trees below.
- Category U (red colour-coded): Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years.
- Reasonably young trees below 150mm stem diameter would normally be given a C category (if they satisfy the retention quality criteria). However, as they are small they could be replaced/transplanted and as such they should not be regarded as a significant constraint on a development.

2.2 ARBORICULTURAL IMPACT ASSESSMENT (AIA 1)

As part of this AIA1 we have considered the following BS:5837 (2012) criteria:

1. Tree Categories (Quality Assessment).
2. Crown Spread measured to the four cardinal compass points for single specimens only.
3. Root Protection Areas (RPAs).
4. Tree Constraints.

N.B. Trees and shrubs are living organisms whose health and condition can change rapidly, for this reason the BS 5837 grades along with any conclusions or tree management recommendations remain valid for a period of 12 months.

3. CONSTRUCTION EXCLUSION ZONES (CEZS)

3.1 GENERAL

The three phases of an Arboricultural Implication Assessment were outlined in Section 1.1.1–1.1.4. In addition, during the development process for retention trees, there may be three or even four constraints to consider - Construction Exclusion Zone (CEZs):

- CEZ 1: Root Protection Area (see 3.1.1).
- CEZ 2: Tree Crown Protection (see 3.1.2).
- CEZ 3: Tree Dominance (see 3.1.3).
- CEZ 4: New Tree Planting Zone (see 3.1.4).

The above CEZ's are explained further below.

3.1.1 CEZ 1: ROOT PROTECTION AREA (RPA)

The RPA, calculated in m², should be protected before and during any demolition/construction works. This ensures the effective retention of trees by preventing physical damage to (a) roots and (b) their rooting environment (typical problems - soil compaction; soil level changes and soil capping that can impede gaseous exchange to living roots*). The RPA is based on a radial measure from the centre of the tree stem, which is calculated by multiplying the stem diameter by a factor of twelve (or by a factor of ten when measuring basal diameter immediately above the root flare for multi-stemmed trees). With the AIA1, the RPA is only shown indicatively on the preliminary Tree Constraints Plan (TCP), as its shape may be subject to amendment as the design progresses.

During the AIA2, the derived radial measure is converted by the consulting Arborist into the actual area to be protected, having due regard to prevailing site conditions and how these may have affected the tree(s).

The means of protecting the RPA will include the installation of tree protection fencing prior to the start of any demolition or construction work on site, the prohibition of various harmful activities within the RPA (e.g. mechanical excavation, soil stripping & trenching, fire lighting, materials storage and creating excessive sealed surfacing), and may include the use of temporary ground protection and/or special engineering solutions where construction is proposed near to retention trees or within the RPA.

* Roots must have oxygen for survival, growth and effective functioning.

3.1.2 CEZ 2: TREE CROWN PROTECTION ZONE

This is the area above ground occupied by the tree crown (branches) and considers the required demolition/construction working space necessary for the development. The possibility of an acceptable quantum of pruning may be considered: subject to Council permission/consent (see Section 4.1.1).

Arising from the above, the means of protecting CEZ 2 is likely to include providing an adequate separation distance between retention trees and new buildings. This will relate to the CEZ 3: below.

3.1.3 CEZ 3: TREE DOMINANCE ZONE

This is the area above ground dominated by the tree in relation to issues of shading, seasonal debris and the safety apprehension by the site owner/occupier. This area is assessed by considering the height and spread of the tree (now and in the future) relative to the proposed buildings, cross-referenced with the intended end-use. As such, what is assessed is the likely psychological effect of the tree(s) on the end-user.

The purpose of identifying CEZ 3 is to protect trees from post-development pressure by the site's end-users, who may, if resentful of the trees, seek to procure excessive pruning treatments (i.e. the bad practice of topping & lopping) or even to have them removed. This is a common LPA concern, which may lead to application withdrawals, refusals and/or dismissed Appeals.

The means of protecting CEZ 3 is likely to include optimising the site layout and room type (especially in relation to new residential dwellings), such that any adverse impacts of trees are reduced to an acceptable minimum. The key principle is to ensure adequate separation distances between trees and new buildings: notably with habitable space & primary windows.

3.1.4 CEZ 4: NEW PLANTING ZONE

In some cases, it may be appropriate to identify and protect areas intended for new landscape planting, which can fail to establish if the soil has been heavily compacted or contaminated during the demolition/construction process. The means of protecting CEZ 4 will either be by fencing prior to the start of demolition/construction works or by pre-planting soil remediation once construction has finished. Topsoil protection in areas destined for new planting is frequently an economic measure, saving on soil structure remediation and tree (failure) replacement costs.

4. STATUTORY CONTROLS

4.1 PLANNING LEGISLATION (TREES)

4.1.1 STATUTORY TREE PROTECTION

Trees can be protected in law – via Tree Preservation Orders (TPOs) or by virtue of them growing in a Conservation Area – by the Government’s Town & Country Planning Act 1990 (the Act). Trees may also be protected by Planning Conditions. In all these instances, written LPA permission/consent is required before protected trees can be pruned or felled*. Contravention of the Act may carry a fine of up to £20,000 and a criminal record.

* Exceptions include those trees that are dead/hazardous or those that are causing an actionable nuisance to a third-party. In any event, evidence must be provided to defend the removal of such trees.

4.1.2 TREES ON SITE

The trees in this area are not protected.

4.2 WILDLIFE LEGISLATION

The Wildlife and Countryside Act (1981) Chapter 69 forms the basis for the legal wildlife protection in Great Britain. Amongst other protected flora and fauna, nesting birds and all species of bat are afforded statutory protection. In brief, it is an offence to:

- Intentionally kill, injure or take a bat.
- Sell, hire, barter or exchange a bat, dead or alive.
- Be in possession or control of a bat or anything derived from them.
- Disturb a nesting bird.

It is recommended that the client and/or their agent review the Act - <http://www.jncc.gov.uk/page-3614> - for further information and guidance.

5. WILDLIFE HABITATS

A cursory assessment of wildlife habitat values of trees and hedgerows on the site was carried out during the survey. No protected or exceptional habitats were identified and details were not recorded. However, trees and hedgerows of most species provide valuable nesting sites for a wide range of birds and it is likely that nesting birds will be present on the site during the period March to September. We have not been made aware of the presence of roosting bats and have not identified any obvious signs of roost sites. However, this does not mean that roost sites are absent.


6. THE SQUIRRELS ESTATE, VIVEASH CLOSE, WEST DRAYTON TREE REPORT

(to be read in conjunction with the appended AIA plan and Tree Survey)

6.1 THE PROPERTY AND THE DEVELOPMENT PROPOSAL

6.1.1 Site description:

The site consists of a trading estate situated on Viveash Close.

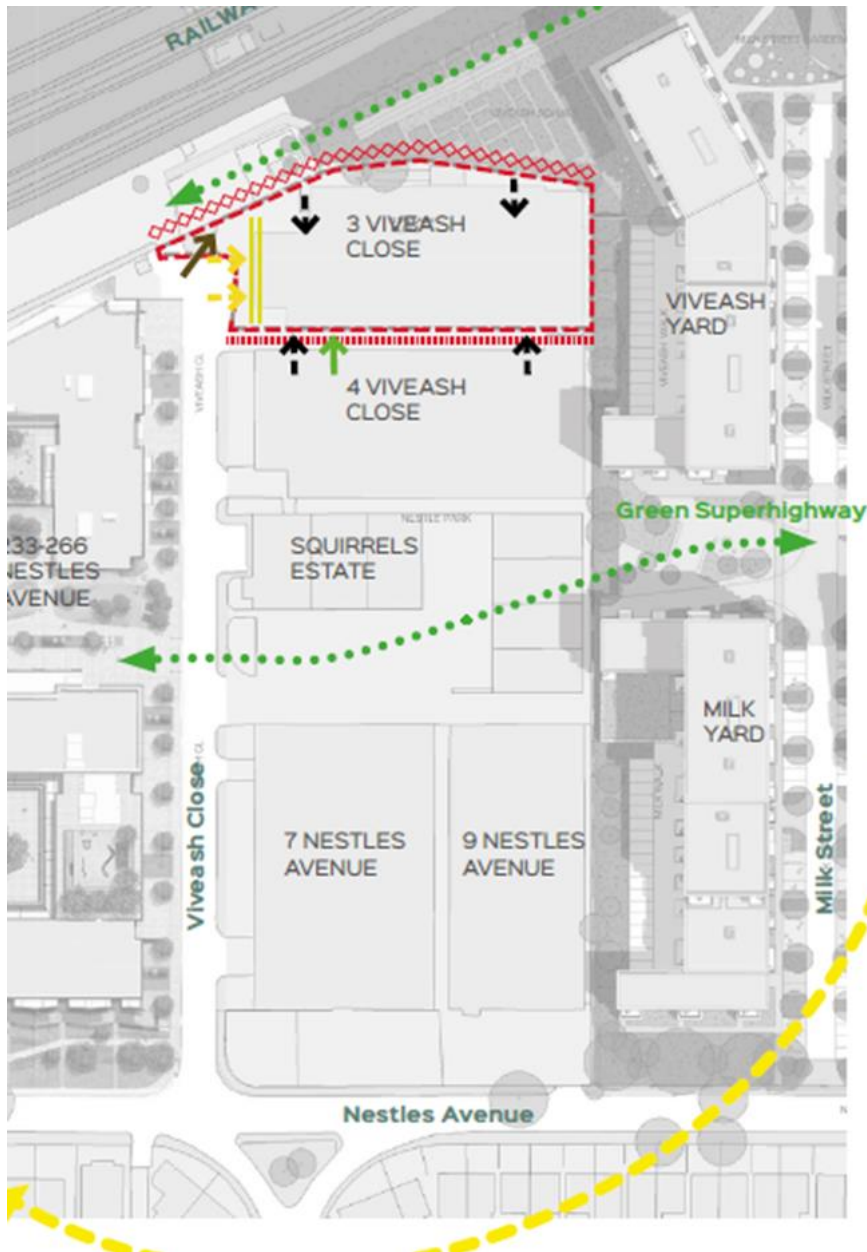

6.1.2 The proposal

It is proposed to demolish the existing buildings and build new units with landscaping as illustrated below.



The location and detail of the proposed development and the positioning and numbering of the trees can be found plotted on the AIA plan at Appendix 2 and separate document Ref : AIA/20765. NB The original of this plan was produced in colour – a monochrome copy should not be relied upon.

6.2 TREES ON-SITE

Seven on site trees have been surveyed. All are C category or less, which should not form a constraint to the proposed development.

T01 is a maple




Trees T3 and T4 are mature birch



Tree T04 and T05 are hornbeams



At the rear of the site are 2 self sown sycamore trees, one of which has died

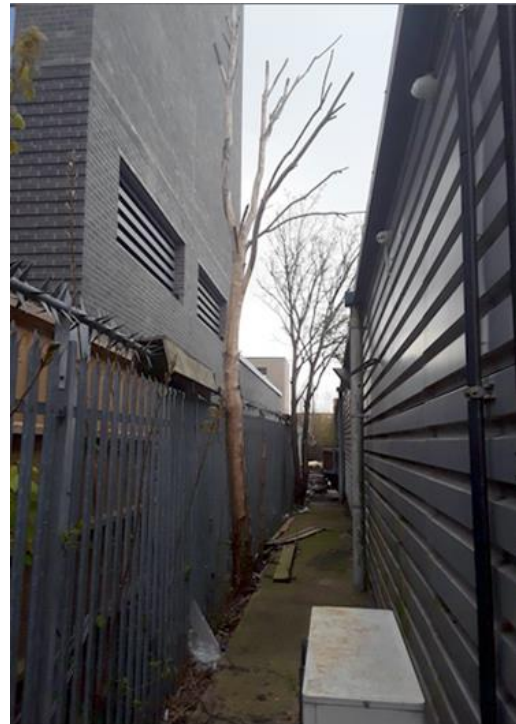

6.3 TREES OFF-SITE

There are no off-site trees.

6.4 IMPACT PROPOSAL ON TREES

(to be read in conjunction with the Arboricultural Impact Assessment- AIA - at Appendix 3)

6.4.1 Underground Utilities

Locations of proposed underground services were not identified on the provided plans, although these must not be sited within the Root Protection Area (RPA) of any retention tree without prior discussion and approval from the LPA and/or a Consulting Arborist. See section 6.5.

6.4.2 CEZ 1: Root Protection Areas (RPAs)

6.4.2.1 Footprint of the Proposed Build

It is proposed to remove all trees for this development

6.4.3 CEZ 2: Tree Crown Protection Zones

There are no crown protection issues.

6.4.4 CEZ 3: Tree Dominance Zones

There are no tree dominance issues with this development.

6.5 UNDERGROUND UTILITIES

The service runs will need to be provided but it is likely that the existing ones will be used.

6.6 TREE PROTECTION DURING CONSTRUCTION

6.6.1 Tree Protection

The protection of retention trees is paramount to the granting of planning permission, the discharge of tree protection Planning Conditions, the design of the development and the future health, stability and success of the trees. It is widely recognised that mature trees add value to both land and property values.

6.6.2 The Root Protection Area (RPA)

RPAs around retention trees should be maintained by the erection of a temporary tree protection barrier (TPB). The position and extent for the TPB will normally concur with the radius/squared area of the RPA. This staked-off area shall be known as the Construction Exclusion Zone (CEZ). The integrity of the TPB to protect CEZs should be maintained for the duration of the entire development works.

6.7 ARBORICULTURAL METHOD STATEMENT

6.7.1 Purpose & Use

As part of the final approved scheme an Arboricultural Method Statement (AMS) will need to be developed. This AMS lays down the methodology for any demolition and/or construction works that may have an effect upon trees on and adjacent to this site. It is essential within the scope of any contracts - related to this development - that this AMS is observed and adhered to. It is recommended that this document forms part of the work schedule and that specifications are issued to the building contractor(s) and these should be used to form part of their contract.

6.7.2 Site Supervision

An individual – ideally the Site Agent - must be nominated to be responsible for all arboricultural matters on site. This person must:

- be present on site for the majority of the time;
- be aware of (a) the Tree Protection Plan and (b) the tree protection measures to be installed and maintained throughout the build;
- have the authority to stop any work that is causing, or has the potential to cause, harm to any retention trees;
- be responsible for ensuring that all site operatives are aware of their responsibilities towards on/off site trees and the consequences of the failure to observe these responsibilities;
- make immediate contact with the designated Consulting Arborist (contact number listed on the appended AMS) in the event of any tree related problems occurring, whether actual or potential.

6.7.3 AMS Adoption

If conflicts between any part of a tree and the build arise in the course of the development these can – and should be – resolved quickly and at little costs if a qualified and experienced Consulting Arborist is contacted promptly. Lack of such care will likely lead to the decline and even death of affected trees: often with legal ramifications. The loss or damage to retention trees can spoil design, affect site sale ability and reflects badly on the construction and design personnel involved. Conversely, trees that have received careful handling during construction add considerably to the appeal and value of the finished development.

7. CONCLUSIONS

7.1 DEVELOPMENT PROPOSAL & POTENTIAL IMPACT ON TREES

- 7.1.1 It is proposed to demolish the existing buildings and construct a new layout.
- 7.1.2 There are 7 low quality trees on site which will need to be removed.
- 7.1.3 As can be seen by the proposed layout the loss of amenity will be mitigated by an extensive landscape scheme.

8. RECOMMENDATIONS

8.1 EXECUTION OF CONTRACT

It is recommended that the Architect specifies in writing to the building contractor that tree care conditions apply to the execution of the contract. Lack of care frequently results in the damage, decline and eventual death of trees. This can adversely affect design aims & site sale-ability, and reflects poorly on the contractors and design personnel involved. Trees that have been the recipients of careful handling during construction add considerably to the appeal and value of finished developments.

8.2 PROPOSED REVISIONS TO THE SCHEME

We advise that all proposed revisions in respect of external layout, orientation of primary windows, location of underground services, external surfacing and/or landscaping; having implications for retention trees should be referred to us for review.

9. OCCUPIERS LIABILITY ACTS

Attention is drawn to the provisions of the Occupiers liability Acts (England & Wales - 1957 & 1984), which place a responsibility upon landowners to ensure the safety of others entering their land whether by invitation or permission: inclusive of trespassers. There is a special responsibility to ensure the safety of children, who may be unaware of hazards. Annual inspections of trees by a competent person, or following storm events, together with implementation of any remedial tree work recommendations, should ensure compliance with the legislation regarding the above legislation.

APPENDICES

APPENDIX 1

TREE SURVEY SCHEDULE

Ref.	Species	Measurements	General Observations	Retention Category	RPA	Physiological Cond	Structural Cond	Recommendations
T01	Box Elder Maple (<i>Acer negundo</i>)	Height (m): 12 Stem Diam (mm): 360 Spread (m): 4N, 4E, 4S, Crown Clearance (m): 2 Life Stage: Mature Rem. Contrib.: 10+ Years	This mature tree is growing in a raised planter	C	Radius: 4.3m. Area: 58 sq m.	Good	Good	Remove for development
T02	Birch (<i>Betula sp.</i>)	Height (m): 12 Stem Diam (mm): 220 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Mature Rem. Contrib.: 10+ Years	This mature tree is growing in a raised planter	C	Radius: 2.6m. Area: 21 sq m.	Good	Good	Remove for development

Ref.	Species	Measurements	General Observations	Retention Category	RPA	Physiological Cond	Structural Cond	Recommendations
T03	Birch (<i>Betula sp.</i>)	Height (m): 12 Stem Diam (mm): 300 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 2 Life Stage: Mature Rem. Contrib.: 10+ Years	This mature tree is growing in a raised planter	C	Radius: 3.6m. Area: 41 sq m.	Good	Good	Remove for development
T04	Hornbeam (<i>Carpinus betulus</i>)	Height (m): 12 Stem Diam (mm): 240 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 4 Life Stage: Mature Rem. Contrib.: 10+ Years		C	Radius: 2.9m. Area: 26 sq m.	Good	Good	Remove for development

mail@syntegragroup.com
Tel: 0330 053 6774

LONDON | READING | TONBRIDGE | BRISTOL

Registered Company No. 06408056
VAT Registration No. 980016044
BSI Certificate Number FS 710041



Ref.	Species	Measurements	General Observations	Retention Category	RPA	Physiological Cond	Structural Cond	Recommendations
T05	Hornbeam (<i>Carpinus betulus</i>)	Height (m): 10 Stem Diam (mm): 200 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Mature Rem. Contrib.: <10 years	This tree has suffered vehicle damage and has died back as a result	U	None - due to Retention Category of U.	Poor	Fair	Remove for management reasons
T06	Dead tree	Height (m): 9 Stem Diam (mm): 200 Spread (m): 1N, 1E, 1S, 1W Life Stage: Dead		U	None - due to Retention Category of U.	Dead		Remove for management reasons
T07	Sycamore (<i>Acer pseudoplatanus</i>)	Height (m): 10 2 stems, diam(mm): 200, 150 Spread (m): 3N, 1E, 3S, 2W Life Stage: Mature Rem. Contrib.: <10 years	Self sown tree on rear boundary in decline	C	Radius: 3.0m. Area: 28 sq m.	Fair	Fair	Remove for management reasons

mail@syntegragroup.com
Tel: 0330 053 6774

LONDON | READING | TONBRIDGE | BRISTOL

Registered Company No. 06408056
VAT Registration No. 980016044
BSI Certificate Number FS 710041



APPENDIX 2


Arboricultural Impact Assessment plan

mail@syntegragroup.com
Tel: 0330 053 6774


LONDON | READING | TONBRIDGE | BRISTOL

Registered Company No. 06408056
VAT Registration No. 980016044
BSI Certificate Number FS 710041




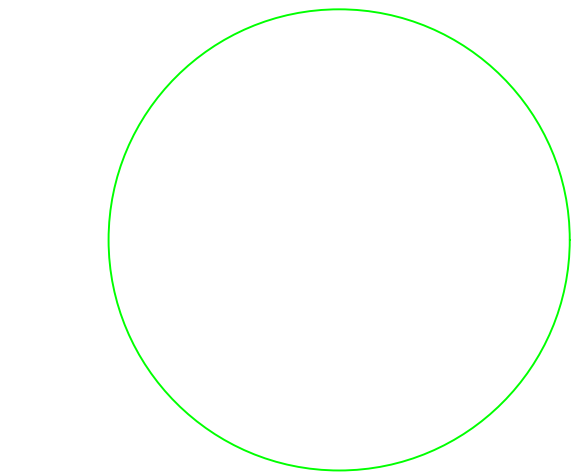


Tree canopy

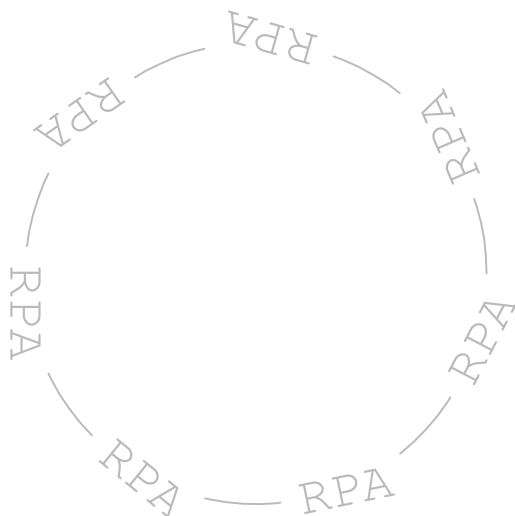

RPA cat C

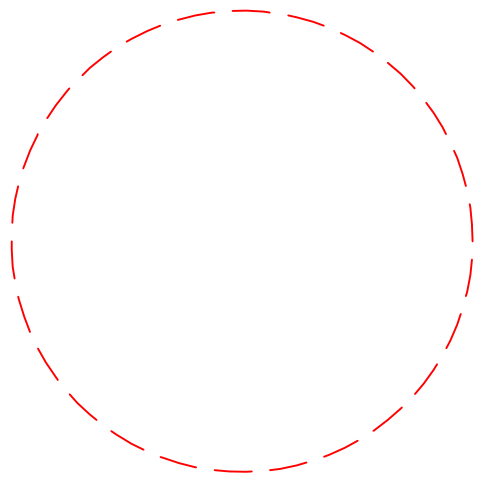

Cat U

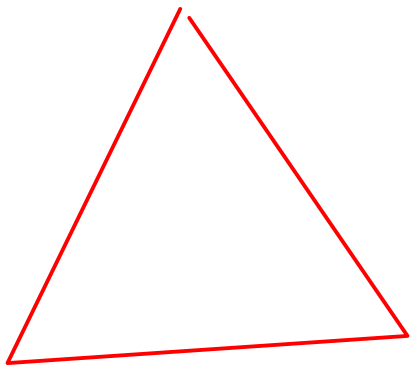

Tree to remove

Rev	Date	Description	Checked
Syntegra			
Squirrels Trading Estate, Hayes			
AIA			
Drawing No.		20792	
Scale	1:200@ A1	Date	14/09/22
Drawn	PP	Checked	PP