



Squirrels,
Viveash Close,
Hayes, UB3
4RZ

Thermal Comfort Overheating Assessment

Nov 2022



Ref 22-8770

Quality Standards Control

The signatories below verify that this document has been prepared in accordance with our quality control requirements. These procedures do not affect the content and views expressed by the originator.

This document must only be treated as a draft unless it has been signed by the originators and approved by a director.

Revision	Initial	Rev A	Rev B	Rev C
Date	08/11/2022			
Prepared by	K. Yahia			
Checked by	L. Arez			
Authorised by	M. Standen			

Limitations

Syntegra Consulting Ltd ("SC") has prepared this report for the sole use of the client in accordance with the agreement under which our services were performed. No other warranty, expressed or implied, is made as to the professional advice included in this report or any other services provided by SC.

The conclusions and recommendations contained in this report are based upon information provided by others and upon the assumption that all relevant information has been provided by those parties from whom it has been requested and that such information is accurate. Information obtained by SC has not been independently verified by SC, unless otherwise stated in the report.

The methodology adopted and the sources of information used by SC in providing its services are outlined in this report. The work described in this report was undertaken in **November 2022** and is based on the conditions encountered and the information available during the said period of time. The scope of this report and the services are accordingly factually limited by these circumstances.

Where assessments of works or costs identified in this report are made, such assessments are based upon the information available at the time and where appropriate are subject to further investigations or information which may become available. SC disclaim any undertaking or obligation to advise any person of any change in any matter affecting the report, which may come or be brought to SC's attention after the date of the report.

Certain statements made in the report that are not historical facts may constitute estimates, projections or other forward-looking statements and even though they are based on reasonable assumptions as of the date of the report, such forward-looking statements by their nature involve risks and uncertainties that could cause actual results to differ materially from the results predicted. SC specifically does not guarantee or warrant any estimate or projections contained in this report.

Costs may vary outside the ranges quoted. Whilst cost estimates are provided for individual issues in this report these are based upon information at the time which can be incomplete. Cost estimates for such issues may therefore vary from those provided. Where costs are supplied, these estimates should be considered in aggregate only. No reliance should be made in relation to any division of aggregate costs, including in relation to any issue, site or other subdivision.

No allowance has been made for changes in prices or exchange rates or changes in any other conditions which may result in price fluctuations in the future. Where assessments of works or costs necessary to achieve compliance have been made, these are based upon measures which, in SC's experience, could normally be negotiated with the relevant authorities under present legislation and enforcement practice, assuming a pro-active and reasonable approach by site management.

Forecast cost estimates do not include such costs associated with any negotiations, appeals or other non-technical actions associated with the agreement on measures to meet the requirements of the authorities, nor are potential business loss and interruption costs considered that may be incurred as part of any technical measures.

Copyright

© This report is the copyright of SC. Any unauthorised reproduction or usage by any person other than the addressee is strictly prohibited.

1.0 EXECUTIVE SUMMARY	5
2.0 LONDON LOCAL POLICIES.....	6
2.1 The London Plan: Policy 5.9 Overheating and Cooling.....	6
2.2 Local Policy.....	7
2.3 Building Categories	8
3.0 CIBSE TM52: 2013 – OVERVIEW	9
4.0 CIBSE TM59: 2017 - OVERVIEW	11
5.0 DESIGN SUMMER YEAR WEATHER FILES	13
6.0 MODEL INPUTS	14
6.1 Heat Gains and Air Permeability Parameters	14
6.2 Building Fabric Parameters	15
6.3 Occupancy Profiles.....	15
6.4 Ventilation openings.....	16
6.5 Opening Profiles.....	16
7.0 OVERHEATING ANALYSIS RESULTS.....	18
7.1 Summary of Criteria Thresholds Accordingly to TM52: 2013.....	19
7.2 Overheating Occupied Room Results – DSY1	20
7.3 Overheating Occupied Room Results – DSY2	35
7.4 Overheating Occupied Room Results – DSY3	35
8.0 CONCLUSIONS.....	41

1.0 Executive Summary

Syntegra Consulting has assessed the overheating risk for the proposed development at **Squirrels, Viveash Close, Hayes, UB3 4RZ**. The proposed development is a refurbishment of the existing office building **within** the London **Borough of Hillingdon**. This report outlines the inputs and the results of the overheating analysis for the occupied residential spaces (i.e. Bedrooms and Living rooms) within the development to satisfy CIBSE TM52 and 59 requirements.

Dynamic overheating modelling using IES-VE 2022 has been carried out in line with CIBSE TM 52 (The Limits of Thermal Comfort) and TM59 (Design Summer Years for London). The overheating criteria set by TM52 and Design Summer Years (DSY) set by TM59 can be found in the following sections of this report. The assessment results are summarised as follows.

- CIBSE TM52 Compliance**

To meet the compliance requirements and minimise the risk of overheating in extreme weather conditions, the feasibility of natural ventilation, passive cooling measures and mechanical comfort cooling has been tested. According to the cooling hierarchy, passive cooling measures have been prioritised first, then active measures have been investigated further. It was concluded that:

Concluding this TM52 & TM 59 Overheating analysis along with the cooling hierarchy exercise indicates that cooling could be avoided if external louvres are adopted in all the occupied spaces. However, cooling will be required in order for all habitable spaces to achieve comfortable internal temperatures in future climate weather scenarios.

More details of the used measures in table 1 below are explained further in the following sections of the report.

Assessment scenario	TM52 Criteria			Assessment
Criteria type	Criteria 1 (%Hrs Top-Tmax>=1K)	Criteria 2 (Max. Daily Deg.Hrs)	Criteria 3 (Max. DeltaT)	Results
Strategy	Adopting Natural Ventilation Only			Fail
	Adopting internal Curtain/Blind for solar gains above 250 W/m2			Partially Pass
	Adopting external louvers for solar gains above 250 W/m2			Pass
	Adopting mechanical comfort cooling using ASHP			Pass

Table 1, Overheating risk mitigation measures

2.0 LONDON LOCAL POLICIES

2.1 The London Plan: Policy 5.9 Overheating and Cooling

Strategic

The mayor seeks to reduce the impact of the urban heat island effect in London and encourages the design of places and spaces to avoid overheating and excessive heat generation, and to reduce overheating due to the impacts of climate change and the urban heat island effect on an area wide basis.

Planning Decisions

- A. Major development proposals should reduce potential overheating and reliance on air conditioning systems and demonstrate this in accordance with the following cooling hierarchy:
 - 1. minimise internal heat generation through energy efficient design
 - 2. reduce the amount of heat entering a building in summer through orientation, shading, albedo, fenestration, insulation and green roofs and walls
 - 3. manage the heat within the building through exposed internal thermal mass and high ceilings
 - 4. passive ventilation
 - 5. mechanical ventilation
 - 6. active cooling systems (ensuring they are the lowest carbon options).
- B. Major development proposals should demonstrate how the design, materials, construction, and operation of the development would minimise overheating and also meet its cooling needs. New development in London should also be designed to avoid the need for energy intensive air conditioning systems as much as possible. Further details and guidance regarding overheating and cooling are outlined in the London Climate Change Adaptation Strategy.

London local policies have a similar though more stringent policy regarding CO₂ emissions and overheating. In particular, it recommends the use of predicted weather files for the 2050 and 2080 years as detailed in the local policy below.

2.2 Local Policy

Overheating mitigation

- Requires all developments to demonstrate that it is designed to be adapted to climate change, particularly through design which minimises overheating and incorporates sustainable drainage systems (SUDS).
- Sets out a sequential cooling hierarchy requirement for internal temperature modelling

climate change through design which minimises overheating. Developments are required to demonstrate how the proposed design has maximised incorporation of passive design measures to control heat gain and to deliver passive cooling, following the sequential cooling hierarchy, below:

- 1 **Passive design** to minimise unwanted heat gain and manage heat – for example by using building orientation, reduced fenestration, external shading (including from vegetation), a well-insulated and airtight building envelope, exposed thermal mass (e.g. aim for a minimum of 1m² of room exposed thermal mass - walls and ceilings - per m² of floor area), green roof, high albedo surfaces and energy efficient lighting and equipment.
- 2 **Passive/natural cooling** – use outside air (perhaps pre-cooled by soft landscaping, a green roof, or by passing it underground to ventilate and cool a building without the use of a powered system, for example by maximising cross ventilation, passive stack and wind-driven ventilation and enabling night-time purge ventilation. Single aspect and deep plan developments are discouraged as effective passive ventilation can be difficult or impossible to achieve. Windows and/or ventilation panels should be designed to allow effective and secure ventilation.
- 3 **Mixed mode cooling** with local mechanical ventilation/cooling provided where required in order to supplement the above measures using (in order of preference): i. Low energy mechanical cooling (e.g. fan-powered ventilation with/without evaporative cooling or ground coupled cooling) ii. Air conditioning (not a preferred approach as these systems are energy intensive)
- 4 **Full building mechanical ventilation/cooling system** using (in order of preference): i. Low energy mechanical cooling. ii. Air conditioning.

Measures at the highest possible level of the above cooling hierarchy should be utilised to the fullest extent possible before the next level of the hierarchy is utilised. Use of technologies from lower levels of the hierarchy shall not be supported unless evidence is provided to demonstrate that technologies from higher levels of the hierarchy cannot deliver sufficient heat control.

Where mechanical ventilation/cooling systems are required, the location(s) for dumping heat into the outside air should be carefully considered to minimise negative impacts on pedestrians, biodiversity and external air being drawn into buildings.

All major developments shall be designed and built to comply with CIBSE overheating standards. The methodology to deliver the cooling of the development should be in line with the cooling hierarchy above.

Overheating analysis should be carried out using dynamic simulation modelling software approved by the Building Energy Calculation Software Approval Scheme for use with the revision of The Building Regulations Part L in force at the time of the application. Modelling results should be provided for a representative sample of rooms with no active cooling (in accordance with the cooling hierarchy, the aim should be to minimise and where possible avoid the need for active cooling). Overheating calculations shall be carried out using both (i) a primary Design Summer Year (DSY) against which buildings have to be modelled to demonstrate overheating has been designed out, and (ii) a secondary DSY against which designers must make specific provision for the inclusion of further design elements (which may not be present in the original design) to ensure that overheating does not become an issue.

2.3 Building Categories

Category	Explanation	Suggested Acceptable Range (K)
Category I	High level of expectation only used for spaces occupied by a sensitive and fragile person.	2
Category II	Normal expectation (for new buildings and renovations)	3
Category III	A moderate expectation (used for existing buildings)	4

Table 2, buildings categories and suggested

3.0 CIBSE TM52: 2013 – OVERVIEW

In order to assess the overheating for the proposed development the methodology outlined in the **CIBSE Technical Memorandum 52** has been followed.

“Overheating has become a key problem for building design. The need to reduce energy consumption whilst dealing with global climate change has reduced the options available for building comfortable, low-energy buildings. Research has been directed towards methods for increasing indoor winter temperatures, but this can lead to lightweight, highly insulated buildings that respond poorly in the summer”.

One problem for designers has been the absence of an adequate definition of overheating in naturally ventilated buildings. In the past overheating has been defined as a number of hours over a particular temperature, irrespective of conditions outside the building. Recent work embodied in European standards suggests that the temperature that occupants will find uncomfortable changes with the outdoor conditions in a predictable way. This research informs the CIBSE guidance presented in this Technical Memorandum (TM). The meaning of the research and the link with overheating are explained and a series of criteria by which the risk of overheating can be assessed or identified are suggested.”

Adaptive Comfort Criteria

The following three criterias, taken together, are used to assess the risk of overheating of buildings in the UK and Europe. A room or building that fails any two of the three criteria is classed as overheating.

1. **The first criterion** sets a limit for the number of hours that the operative temperature can exceed the threshold comfort temperature (upper limit of the range of comfort temperature) by 1K or more during the occupied hours of a typical non-heating season (1st May to 30th September). For new buildings, major refurbishments and adaptations strategies CIBSE recommends to conform to building Category II in BS EN 15251 (BSI, 2007). For these type category of buildings the limit for the number of hours exceeding the upper limit temperature is set to 3% of the occupied hours.
2. **The second criterion** deals with the severity of overheating within any one day, which can be as important as its frequency, the level of which is a function of both temperature rise and its duration. This criterion sets a daily limit for acceptability.
3. **The third criterion** sets an absolute maximum daily temperature for a room, beyond which the level of overheating is unacceptable. This criterion for building Category II is set to 4K. This means that if the internal operative temperature is 4K above the upper limit of comfort temperature the building fails the third criterion.

For Category II type of buildings, the maximum acceptable temperature (T_{max}) can be calculated from the running mean of the outdoor temperature (T_{rm}) using the formula:

$$T_{max} = 0.33 T_{rm} + 21.8$$

Where T_{max} is the maximum acceptable temperature ($^{\circ}C$). It should be noted that for buildings that have a higher level of expectation in respect to spaces that are occupied by very sensitive and vulnerable persons. More demanding standards suggested for Category I (more restrictive) can be agreed with the client if required. This sets the maximum acceptable temperature (T_{max}) at 1 K less than the above recommendation.

The criteria are all defined in terms of ΔT the difference between the actual operative temperature in the room at any time (T_{op}) and T_{max} the limiting maximum acceptable temperature. ΔT is calculated as:

$$\Delta T = T_{op} - T_{max}$$

ΔT is rounded to the nearest whole degree (i.e. for ΔT between 0.5 and 1.5 the value used is 1 K; for 1.5 to 2.5 the value used is 2 K, and so on).

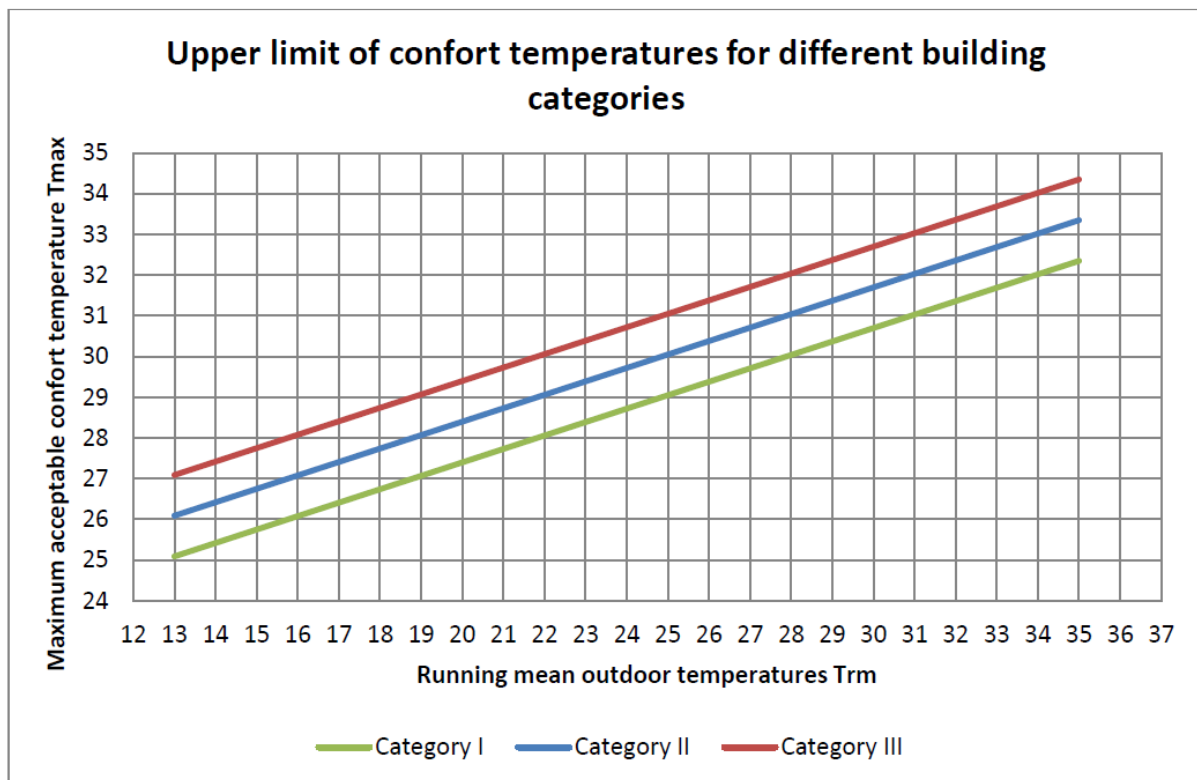


Figure 1, maximum acceptable temperature

4.0 CIBSE TM59: 2017 - OVERVIEW

In April 2017 the Chartered Institution of Building Services engineers (CIBSE) published this Technical Memorandum to provide guidance when evaluating dwellings for overheating assessment. This document provides a set of profiles that represent reasonable usage patterns for a home suitable for evaluating overheating risk. The heat gains are taken, when possible, from CIBSE guide A. This guidance is the first attempt to try to standardise overheating assessments however further work is needed and the use is intended in the interim.

This methodology is based on the use of dynamic thermal modelling for the treatment and assessment of overheating risk **in residential buildings**. This methodology is proposed for all residences and should especially be considered for:

- *large developments*
- *developments in urban areas, particularly in southern England*
- *blocks of flats*
- *dwellings with high levels of insulation and air-tightness*
- *single aspect flats.*

Individual houses and developments with a low risk of overheating may not require the use of dynamic thermal modelling. Professional judgement must be used when taking the decision to omit dynamic thermal modelling to test overheating.

The assessment should follow the following steps:

1. A suitable sample of units within a development should be selected, i.e. - These are likely to be those (a) with large glazing areas, (b) on the topmost floor, (c) having less shading, (d) having large, sun-facing windows, (e) having a single aspect, or (c) having limited opening windows.
2. Zoning: all sample units should be zoned into the separate rooms including kitchens, living rooms, bedrooms, bathrooms and halls.
3. Building constructions should be modelled as proposed, accurately reflecting thermal properties such as thermal mass, insulation and solar transmittance for glazing.
4. Standard profiles should be applied for occupancy, lighting, and equipment gains.
5. Guidance on the treatment of communal corridors should be followed.
6. Pipework and equipment, e.g. heat interface unit gains from community heating system.
7. Operable windows should be included in the model and follow the guidance given in this guide.
8. Any internal or external shading provision should be included in the model and follow the guidance included.
9. Additional mechanical ventilation including mechanical ventilation with heat recovery (MVHR) or extract systems should be included in the model.
10. Air speed assumptions should be based on this guidance.
11. The weather file used for the methodology should be the DSY1 (design summer year) file most appropriate for the site location for the 2020s, high emissions, 50% percentile scenario.
12. The assessment should be undertaken using hourly dynamic simulation modelling, which includes all the relevant features of the building.

Criteria for domestic developments predominantly naturally ventilated

Compliance is based on passing both of the following two criteria:

- a. For living rooms, kitchens and bedrooms: the number of hours during which DT is greater than or equal to one degree (K) during the period May to September inclusive **shall not be more than 3 per cent of occupied hours**. (CIBSE TM52 Criterion 1: Hours of exceedance).
- b. For bedrooms only: to guarantee comfort during the sleeping hours the operative temperature in the bedroom from 10 pm to 7 am shall not exceed 26 °C for more than 1% of annual hours. (Note: 1% of the annual hours between 22:00 and 07:00 for bedrooms is **32 hours, so 33 or more hours** above 26 °C will be recorded as a **fail**).

Criteria 2 and 3 of CIBSE TM52 may fail to be met, but both (a) and (b) above (TM59) must be passed for all relevant rooms.

Criteria for domestic developments predominantly mechanically ventilated

For homes with restricted window openings, the CIBSE fixed temperature test must be followed, i.e. all occupied rooms should not exceed an operative temperature of 26 °C for more than 3% of the annual occupied annual hours (CIBSE Guide A (2015a)).

Adjustments for homes with vulnerable occupants

Care homes and accommodation for vulnerable occupants, which are predominantly naturally ventilated (see definition above), should use criteria (a) and (b) from section above but should assume Type I occupancy (see CIBSE TM52 (2013) for description).

If they are predominantly mechanically ventilated (see definition above), the fixed temperature method should be used.

Where there is particular concern of high risk of overheating in accommodation for vulnerable occupants, a heatwave strategy should also be developed using additional weather files (see section 3.2) to explore performance and for demonstrating mitigation options under extreme events (e.g. heatwaves).

Corridors: assessment criteria

The overheating test for corridors should be based on the number of annual hours for which an operative temperature of 28 °C is exceeded. Whilst there is no mandatory target, if an operative temperature of 28°C is exceeded for more than 3% of total annual hours, this should be flagged as a significant risk within the report.

5.0 DESIGN SUMMER YEAR WEATHER FILES

The updated DSYs for London (summer 2016) were selected using the statistic Weighted Cooling Degree Hours (WCDH) metric for 3 locations within the city. These locations consist of some of the warmest in the UK with a high probability of this overheating metric being exceeded. In fact, each year contained some degree of overheating which will not necessarily be true of locations further north where the maximum temperatures are usually much cooler. To ensure the overheating metric is representative of each location, a number of metrics are considered with results compared in addition to the WCDH as described above.

In accordance with TM59 the development requires to pass the overheating criteria using the DSY1 weather file for the most appropriate location as shown in Figure 2. Now, for London there are three weather files each one representing different area within Greater London.

- Central Activity Zone: London Weather Central weather file (LWC)
- Inner London: London Heathrow weather file (LHW)
- Outer London: London Gatwick weather file (LGW)

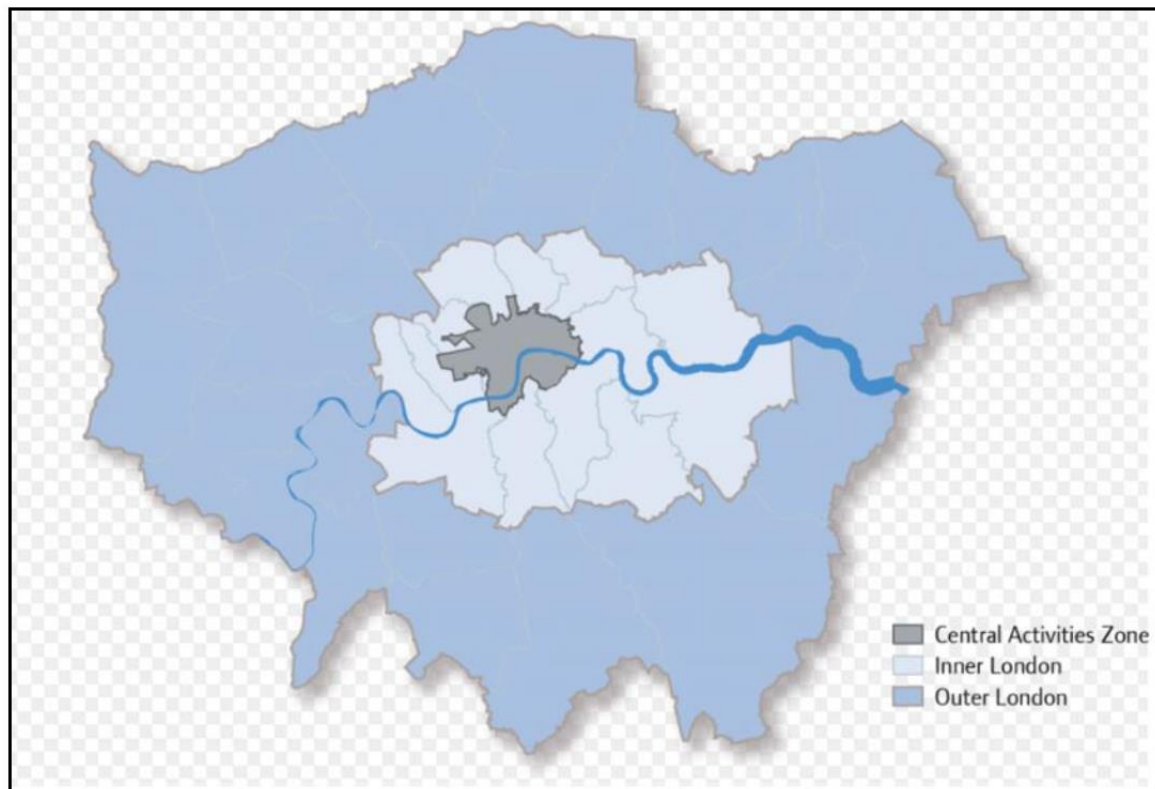


Figure 2, Different Areas of Greater London

6.0 MODEL INPUTS

The input parameters detailed in this Chapter have been extrapolated from CIBSE TM59: Design methodology for the assessment of overheating risk in homes guide. Flats considered for the simulation are Ground, First, Second, Fifth, Ninth, and the Tenth floor.

6.1 Heat Gains and Air Permeability Parameters

For the purpose of the overheating assessment the following parameters and profiles have been used for each building in accordance with TM59. Typical heat gains for people at different activities are given in CIBSE Guide A. The occupancy density in terms of area per person (m^2/person) has been calculated from the layout drawings. The parameters valid for each building are detailed in the tables below.

People Gains		
Max Sensible Gain –	single office	75 W
Max Latent Gain -		55 W
Occupants -		1 person
Max Sensible Gain –	double office	150 W
Max Latent Gain -		111 W
Occupants -		2 people

Table 3 – People Heat Gains

Lighting heat gains have been included in accordance with TM59.

Lighting Gains	
Max Sensible Gain	2 W/m ²
Radiant Fraction	0.45

Table 4 – Lighting Heat Gains

Miscellaneous Equipment Gains	
Max Sensible Gain – Single bedroom	80 W
Max Sensible Gain – Double bedroom	80 W
Max Sensible Gain – Living/kitchen	450 W

Table 5 – Lighting Heat Gains

The infiltration is based on values given in CIBSE guidelines while the ventilation values are based on Building Regulations Approved Document F. For dwellings the guide suggests 21 l/s based on two occupants in the main bedroom and a single occupant in all other bedrooms. However, if greater level of occupancy is expected add 4 l/s per person.

Infiltration and Ventilation		
Type	Infiltration	MVHR or CME depending on external conditions
Variation profile	On continuously	On continuously
Adjacent Condition	External air	External air
Max flow	0.89 l/(s*m ²) equivalent at 3.5m ³ /h m ²	0.29 l/(s*m ²) based on Approved Document F

Table 6 – Air Exchanges figures

6.2 Building Fabric Parameters

Passive Measures	U-values (W/m^2K)
External Walls	0.26
Exposed Ground	0.18
Exposed Roof	0.16
Windows	1.60
Windows G-values	0.75
Doors	1.40
Thermal bridging	Accredited Construction Details
Ventilation	Natural Vent + MVHR
Low energy lighting	LED 100%

Table 7– Prepared U-values and Other Parameters

6.3 Occupancy Profiles

The daily occupancy profiles for each space type have been extrapolated again from TM59 guidance. The occupancy profile is quite important as has a great impact on the overheating results. Figure 2 and 2.1 show the office space profile for a typical weekday.

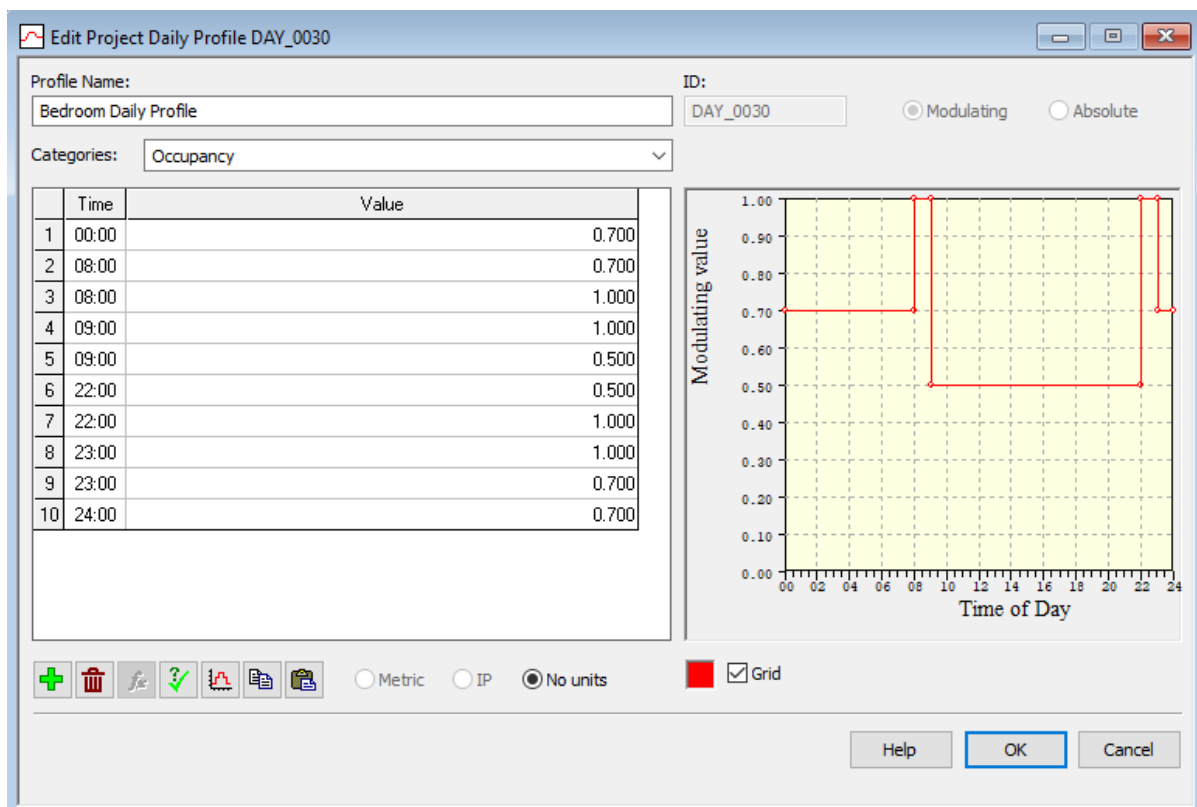


Figure 2, occupancy profile for bedroom spaces

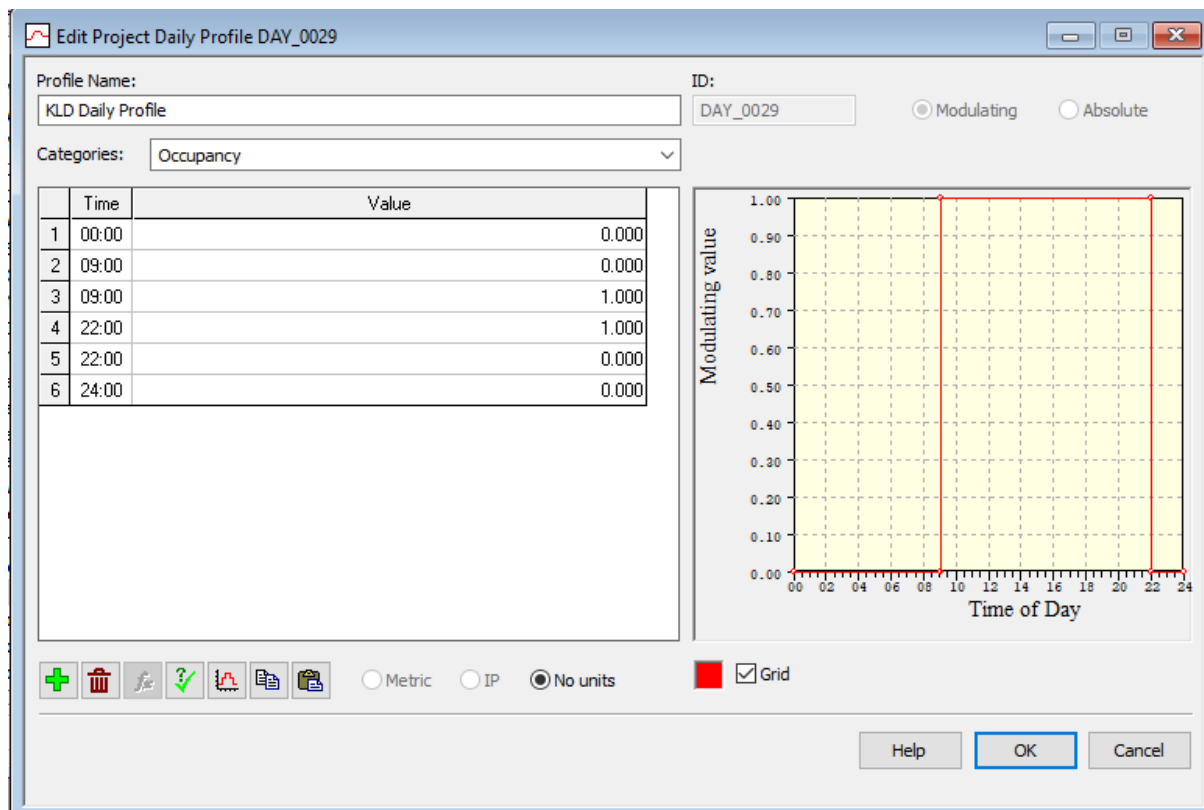


Figure 2.1, occupancy profile for living/kitchen/ dining spaces

6.4 Ventilation openings

Modeling of the natural ventilation was based on the elevations. No mechanical ventilation has been allowed as part of this modelling exercise. Therefore, the windows were assumed to open approximately 25% in accordance with the height of the glass measured on the elevations. This was applied to all openable windows.

6.5 Opening Profiles

Selected windows opening profiles are shown below.

Rooms external windows opening

- Exposure type: dependent on building height
- Opening category: dependent on windows type
- Openable area: 25% of each window type area
- Crack length: 0% of opening perimeter – the infiltration has been considered in another section
- Opening profile: Opening profile (see Figure 3)

Figure 3 shows the opening profile for windows installed in the bedrooms. From 0000hrs to 2400hrs windows are fully open if indoor temperature is higher than 19°C and indoor temperature is higher than outdoor temperature.

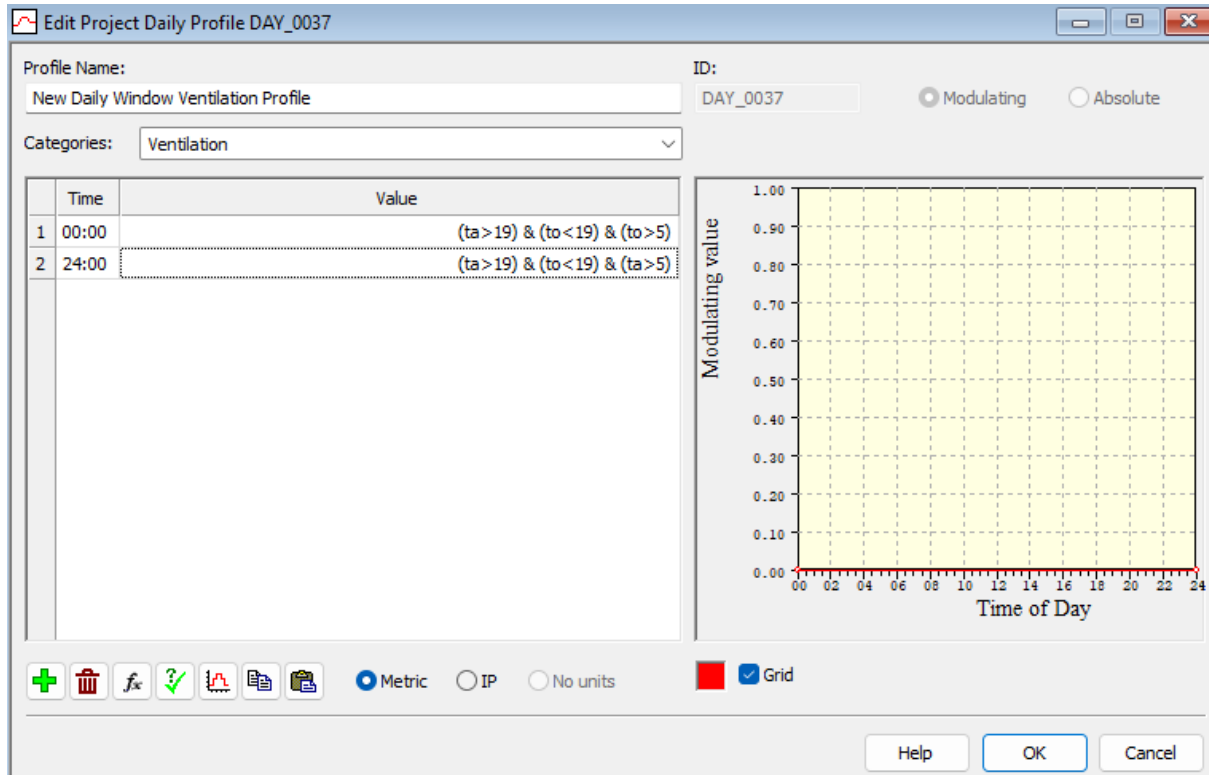


Figure 3, Opening Profile Applied to Bedrooms Windows

7.0 OVERHEATING ANALYSIS RESULTS

The analysis was executed using IES Virtual Environment 2021 which has embedded a module to estimate the adaptive comfort according to the latest CIBSE guide TM52. For new buildings and renovations, the building **category II** has been selected.

Category	Explanation	Suggested Acceptable Range(K)
Category I	High level of expectation only used for spaces occupied by very sensitive and fragile persons.	2
Category II	Normal expectation (for new buildings and renovations)	3
Category III	A moderate expectation (used for existing buildings)	4

Table 8, Building Categories

In collaboration with UK Climate Impacts Programme (UKCIP), the Chartered Institute of Building Services Engineers (CIBSE) has produced a set of weather files for different locations which incorporate weather data projections to account for climate change. Different weather files are available for different locations in the UK. In this study, the London DSY1 file has been used. The Design Summer Year or simply DSY weather file consists of an actual 1-year set of hourly data from the 18-year period mentioned above to represent a year with a hot but not extreme summer. CIBSE Guide A suggests the use of the Design Summer Year weather files when carrying out overheating studies.

It is important to point out that the temperatures embedded in the weather file adopted are already quite high (the peak temperature is achieved on the 22nd of July with a temperature of 33.6°C) greatly contributing to the increase the indoor temperatures.

7.1 Summary of Criteria Thresholds Accordingly to TM52: 2013

The following three criteria, taken together, provide a robust yet balanced assessment of the risk of overheating of buildings in the UK and Europe. Please note that accordingly to CIBSE TM52 a room or building that fails any two of the three criteria is classed as overheating.

Criteria 1

This displays the percentage hours when the difference in operative temperature minus the maximum acceptable temperature is greater than or equal to 1K. Hence, if the operative temperature is equal to or above 1K with respect to the maximum acceptable temperature for more or equal to 3% during the occupied hours the room is failing this criterion.

Criteria 2

This displays the maximum daily degree hours found for the space. This fails if it is greater than 6K.

Criteria 3

This displays the maximum ΔT for the space. If it is greater than or equal to 4K respect the maximum acceptable temperature the room fails this criterion.

For the purpose of the analysis, the overheating has been assessed using the methodology outlined in CIBSE Guide TM52.

CIBSE released updated DSY 1, 2 and 3 weather files towards the end of August 2016 which made amendments to the warmth and length of the summer months used for overheating assessments, however, it's not yet mandatory to use them. The warm year is selected from an 18-year baseline 2003 – 2020 and the 3 DSYs available per location represent summers with different types of hot events:

- **DSY1:** LGW2003_2020High50pct.epw
- **DSY2:** LGW2003_2050High50pct.epw
- **DSY3:** LGW2003_2080High50pct.epw

The CIBSE TM59; 2017 guide states the minimum requirement to pass the overheating assessment is to satisfy two of the three criteria using the single DSY1 file and that it is not mandatory to pass using the DSY2 and DSY3 weather files.

7.2 Overheating Occupied Room Results – DSY1

SCENARIO 1: Considering Nat Ventilation 25% openable windows with no passive measures

Passed:	10 rooms:				
Room Name	Occupied days (%)	Criteria 1 (%Hrs Top-Tmax>=1K)	Criteria 2 (Max. Daily Deg.Hrs)	Criteria 3 (Max. DeltaT)	Criteria failing
5thF_F9 Bed1	100	3	24	3	2
FF_F10 LKD	100	2.2	12	2	2
FF_F11 Bed 1	100	2.9	26	3	2
FF_F13 Bed 1	100	1.9	19	2	2
FF_F9 Bed 1	100	2.7	20	3	2
FF_F9 Bed 2	100	2.9	23	3	2
GF_F1 Bed	100	1.1	11	2	2
GF_F1 LKD	100	2.2	9	2	2
GF_F2 Bed	100	1.3	11	2	2
GF_F2 LKD	100	1.1	5	2	-
Failed:	116 rooms:				
Room Name	Occupied days (%)	Criteria 1 (%Hrs Top-Tmax>=1K)	Criteria 2 (Max. Daily Deg.Hrs)	Criteria 3	Criteria failing
10thF_F16 Bed 1	100	9.5	68	10	1 & 2 & 3
10thF_F16 Bed 2	100	11.4	91	13	1 & 2 & 3
10thF_F16 Bed 3	100	9.9	79	11	1 & 2 & 3
10thF_F16 LKD	100	10.2	36	6	1 & 2 & 3
10thF_F17 Bed 1	100	12.4	106	16	1 & 2 & 3
10thF_F17 LKD	100	21.2	78	11	1 & 2 & 3
10thF_F18 Bed 1	100	10.5	87	7	1 & 2 & 3
10thF_F18 LKD	100	21.6	82	10	1 & 2 & 3
10thF_F19 Bed 1	100	3.8	31	3	1 & 2
10thF_F19 Bed 2	100	3.6	29	4	1 & 2
10thF_F19 LKD	100	10.3	42	4	1 & 2
10thF_F20 Bed 1	100	14	132	17	1 & 2 & 3
10thF_F20 LKD	100	20	85	14	1 & 2 & 3
10thF_F21 Bed 1	100	8.1	70	6	1 & 2 & 3
10thF_F21 LKD	100	6.1	30	4	1 & 2
10thF_F22 Bed 1	100	14.1	130	13	1 & 2 & 3
10thF_F22 Bed 2	100	13.9	121	12	1 & 2 & 3
10thF_F22 LKD	100	22	90	10	1 & 2 & 3
2nF_F14 Bed 1	100	4.6	48	4	1 & 2
2nF_F14 Bed 2	100	6.3	54	5	1 & 2 & 3
2nF_F14 LKD	100	9.4	48	5	1 & 2 & 3
2nF_F15 Bed 2	100	10.4	78	7	1 & 2 & 3
2nF_F15 Bed 3	100	9.2	75	7	1 & 2 & 3
2nF_F15 Bed1	100	13.1	103	12	1 & 2 & 3
2nF_F15 LKD	100	10.6	46	5	1 & 2 & 3

5thF_ F10 Bed 1	100	5.4	49	4	1 & 2
5thF_ F10 LKD	100	3.4	15	3	1 & 2
5thF_ F11 Bed 1	100	3.3	33	3	1 & 2
5thF_ F11 LKD	100	5.4	28	4	1 & 2
5thF_ F12 Bed 1	100	7.5	63	6	1 & 2 & 3
5thF_ F12 Bed 2	100	5.6	51	5	1 & 2 & 3
5thF_ F12 LKD	100	6	34	4	1 & 2
5thF_ F14 Bed 1	100	3.7	45	4	1 & 2
5thF_ F14 Bed 2	100	4.9	53	4	1 & 2
5thF_ F14 LKD	100	5.6	31	4	1 & 2
5thF_ F15 Bed 2	100	10.2	80	7	1 & 2 & 3
5thF_ F15 Bed 1	100	13.4	114	12	1 & 2 & 3
5thF_ F15 Bed 3	100	11	88	8	1 & 2 & 3
5thF_ F15 LKD	100	12.4	53	6	1 & 2 & 3
5thF_ F3 Bed 1	100	9.4	65	9	1 & 2 & 3
5thF_ F3 Bed 2	100	10.9	80	12	1 & 2 & 3
5thF_ F3 Bed 3	100	6.9	51	8	1 & 2 & 3
5thF_ F3 LKD	100	9.7	32	6	1 & 2 & 3
5thF_ F4 Bed 1	100	8.5	58	9	1 & 2 & 3
5thF_ F4 Bed 2	100	8.3	59	9	1 & 2 & 3
5thF_ F4 LKD	100	9.5	34	7	1 & 2 & 3
5thF_ F5 Bed 1	100	9.5	63	10	1 & 2 & 3
5thF_ F5 LKD	100	6.9	24	6	1 & 2 & 3
5thF_ F6 Bed 1	100	7.9	58	9	1 & 2 & 3
5thF_ F6 LKD	100	8.1	30	7	1 & 2 & 3
5thF_ F7 Bed 1	100	9.5	68	10	1 & 2 & 3
5thF_ F7 Bed 2	100	9	69	10	1 & 2 & 3
5thF_ F7 LKD	100	11.3	40	8	1 & 2 & 3
5thF_ F8 Bed 1	100	14.4	141	18	1 & 2 & 3
5thF_ F8 Bed 1	100	13.9	120	13	1 & 2 & 3
5thF_ F8 LKD	100	17.3	66	11	1 & 2 & 3
5thF_ F9 Bed 2	100	3.2	26	3	1 & 2
5thF_ F9 LKD	100	5.5	22	3	1 & 2
9thF_ F10 Bed 1	100	7.3	66	5	1 & 2 & 3
9thF_ F10 LKD	100	6.4	39	4	1 & 2
9thF_ F11 Bed 1	100	7.7	70	6	1 & 2 & 3
9thF_ F11 LKD	100	12.7	59	6	1 & 2 & 3
9thF_ F12 Bed 1	100	12.2	111	12	1 & 2 & 3
9thF_ F12 Bed 2	100	10.8	94	9	1 & 2 & 3
9thF_ F12 LKD	100	13.2	61	6	1 & 2 & 3
9thF_ F14 Bed 1	100	5.7	57	5	1 & 2 & 3
9thF_ F14 Bed 2	100	5.4	53	4	1 & 2
9thF_ F14 LKD	100	10.1	49	6	1 & 2 & 3
9thF_ F15 Bed 2	100	10.2	80	7	1 & 2 & 3

9thF_ F15 Bed 1	100	13.4	119	12	1 & 2 & 3
9thF_ F15 Bed 3	100	11.4	90	8	1 & 2 & 3
9thF_ F15 LKD	100	13.5	58	7	1 & 2 & 3
9thF_ F3 Bed 1	100	9.5	67	10	1 & 2 & 3
9thF_ F3 Bed 2	100	11.2	86	12	1 & 2 & 3
9thF_ F3 Bed 3	100	7.4	60	9	1 & 2 & 3
9thF_ F3 LKD	100	10	35	6	1 & 2 & 3
9thF_ F4 Bed 1	100	9	68	10	1 & 2 & 3
9thF_ F4 Bed 2	100	8.8	65	10	1 & 2 & 3
9thF_ F4 LKD	100	10.5	40	8	1 & 2 & 3
9thF_ F5 Bed 1	100	10.9	81	11	1 & 2 & 3
9thF_ F5 LKD	100	13	43	9	1 & 2 & 3
9thF_ F6 Bed 1	100	9	66	10	1 & 2 & 3
9thF_ F6 LKD	100	12.9	43	9	1 & 2 & 3
9thF_ F7 Bed 1	100	11.2	85	12	1 & 2 & 3
9thF_ F7 Bed 2	100	11.8	98	13	1 & 2 & 3
9thF_ F7 LKD	100	16.1	61	11	1 & 2 & 3
9thF_ F8 Bed 1	100	14.1	127	13	1 & 2 & 3
9thF_ F8 Bed 1	100	14.4	144	18	1 & 2 & 3
9thF_ F8 LKD	100	17.6	72	12	1 & 2 & 3
9thF_ F9 Bed 1	100	3.2	28	3	1 & 2
9thF_ F9 Bed 2	100	3.5	29	4	1 & 2
9thF_ F9 LKD	100	6.4	24	4	1 & 2
FF_ F11 LKD	100	4	18	3	1 & 2
FF_ F10 Bed 1	100	5.1	45	5	1 & 2 & 3
FF_ F12 Bed 1	100	3.4	35	3	1 & 2
FF_ F12 Bed 2	100	3.5	37	3	1 & 2
FF_ F12 LKD	100	5.3	25	3	1 & 2
FF_ F13 LKD	100	8.8	47	5	1 & 2 & 3
FF_ F3 Bed 1	100	8.9	58	9	1 & 2 & 3
FF_ F3 Bed 2	100	10.9	75	11	1 & 2 & 3
FF_ F3 Bed 3	100	6.9	51	8	1 & 2 & 3
FF_ F3 LKD	100	9.1	31	6	1 & 2 & 3
FF_ F4 Bed 1	100	10.4	73	11	1 & 2 & 3
FF_ F4 Bed 2	100	8.6	60	9	1 & 2 & 3
FF_ F4 LKD	100	9	32	7	1 & 2 & 3
FF_ F5 Bed 1	100	9.2	60	9	1 & 2 & 3
FF_ F5 LKD	100	6	20	5	1 & 2 & 3
FF_ F6 Bed 1	100	7.3	47	8	1 & 2 & 3
FF_ F6 LKD	100	7.4	26	6	1 & 2 & 3
FF_ F7 Bed 1	100	9	60	9	1 & 2 & 3
FF_ F7 Bed 2	100	6.4	48	6	1 & 2 & 3
FF_ F7 LKD	100	10.3	38	8	1 & 2 & 3
FF_ F8 Bed 1	100	14.8	134	14	1 & 2 & 3

FF_F8 Bed 2	100	14.4	139	18	1 & 2 & 3
FF_F8 LKD	100	17	66	11	1 & 2 & 3
FF_F9 LKD	100	4.8	19	3	1 & 2

TM52 Simulation Results

	Operative	temperature (TM	52/CIBSE) (°C) -	hours in range
Location	> 26.00 (22-24)	> 26.00 (00-07)	> 26.00 (22-07)	TM59 Results
10thF_F16 Bed 1	25	9	34	Fail
10thF_F16 Bed 2	26	9	35	Fail
10thF_F16 Bed 3	30	13	43	Fail
10thF_F17 Bed 1	22	7	29	Pass
10thF_F18 Bed 1	33	24	57	Fail
10thF_F19 Bed 1	19	7	26	Pass
10thF_F19 Bed 2	19	8	27	Pass
10thF_F20 Bed 1	33	22	55	Fail
10thF_F21 Bed 1	29	18	47	Fail
10thF_F22 Bed 1	35	22	57	Fail
10thF_F22 Bed 2	58	41	99	Fail
2nF_F14 Bed 1	27	14	41	Fail
2nF_F14 Bed 2	25	11	36	Fail
2nF_F15 Bed 2	24	9	33	Fail
2nF_F15 Bed 3	29	14	43	Fail
2nF_F15 Bed1	22	7	29	Pass
5thF_F10 Bed 1	28	19	47	Fail
5thF_F11 Bed 1	25	16	41	Fail
5thF_F12 Bed 1	26	19	45	Fail
5thF_F12 Bed 2	29	22	51	Fail
5thF_F14 Bed 1	62	86	148	Fail
5thF_F14 Bed 2	49	65	114	Fail
5thF_F15 Bed 2	67	102	169	Fail
5thF_F15 Bed 1	59	67	126	Fail
5thF_F15 Bed 3	66	95	161	Fail
5thF_F3 Bed 1	26	10	36	Fail
5thF_F3 Bed 2	26	8	34	Fail
5thF_F3 Bed 3	28	11	39	Fail
5thF_F4 Bed 1	28	11	39	Fail
5thF_F4 Bed 2	21	7	28	Pass
5thF_F5 Bed 1	20	6	26	Pass
5thF_F6 Bed 1	20	7	27	Pass
5thF_F7 Bed 1	22	7	29	Pass
5thF_F7 Bed 2	25	7	32	Pass
5thF_F8 Bed 1	40	28	68	Fail
5thF_F8 Bed 1	76	114	190	Fail
5thF_F9 Bed 1	19	6	25	Pass
5thF_F9 Bed 2	19	6	25	Pass
9thF_F10 Bed 1	31	27	58	Fail
9thF_F11 Bed 1	30	23	53	Fail
9thF_F12 Bed 1	26	22	48	Fail
9thF_F12 Bed 2	31	27	58	Fail

9thF_ F14 Bed 1	35	35	70	Fail
9thF_ F14 Bed 2	29	24	53	Fail
9thF_ F15 Bed 2	43	33	76	Fail
9thF_ F15 Bed 1	55	39	94	Fail
9thF_ F15 Bed 3	55	36	91	Fail
9thF_ F3 Bed 1	26	9	35	Fail
9thF_ F3 Bed 2	27	8	35	Fail
9thF_ F3 Bed 3	28	13	41	Fail
9thF_ F4 Bed 1	29	12	41	Fail
9thF_ F4 Bed 2	21	8	29	Pass
9thF_ F5 Bed 1	20	7	27	Pass
9thF_ F6 Bed 1	20	7	27	Pass
9thF_ F7 Bed 1	20	8	28	Pass
9thF_ F7 Bed 2	27	9	36	Fail
9thF_ F8 Bed 1	71	66	137	Fail
9thF_ F8 Bed 1	35	26	61	Fail
9thF_ F9 Bed 1	19	7	26	Pass
9thF_ F9 Bed 2	19	7	26	Pass
FF_ F10 Bed 1	18	5	23	Pass
FF_ F11 Bed 1	18	6	24	Pass
FF_ F12 Bed 1	19	7	26	Pass
FF_ F12 Bed 2	19	6	25	Pass
FF_ F13 Bed 1	25	28	53	Fail
FF_ F3 Bed 1	24	8	32	Pass
FF_ F3 Bed 2	25	8	33	Fail
FF_ F3 Bed 3	26	10	36	Fail
FF_ F4 Bed 1	22	7	29	Pass
FF_ F4 Bed 2	19	6	25	Pass
FF_ F5 Bed 1	19	6	25	Pass
FF_ F6 Bed 1	19	6	25	Pass
FF_ F7 Bed 1	19	7	26	Pass
FF_ F7 Bed 2	49	40	89	Fail
FF_ F8 Bed 1	64	49	113	Fail
FF_ F8 Bed 2	36	27	63	Fail
FF_ F9 Bed 1	18	5	23	Pass
FF_ F9 Bed 2	19	6	25	Pass
GF_ F1 Bed	20	7	27	Pass
GF_ F2 Bed	18	5	23	Pass

TM59 Simulation Results

SCENARIO 3: Adopting internal curtain for solar gains above 250 W/m²

Passed:	106 rooms:				
Room Name	Occupied days (%)	Criteria 1 (%Hrs Top-Tmax>=1K)	Criteria 2 (Max. Daily Deg.Hrs)	Criteria 3 (Max. DeltaT)	Criteria failing
10thF_F16 Bed 1	100	2	16	3	2
10thF_F16 Bed 3	100	2.6	20	3	2
10thF_F16 LKD	100	1.2	5	2	-
10thF_F18 Bed 1	100	1	9	2	2
10thF_F18 LKD	100	1.9	10	2	2
10thF_F19 Bed 1	100	0	0	0	-
10thF_F19 Bed 2	100	0	0	0	-
10thF_F19 LKD	100	0.1	1	1	-
10thF_F21 Bed 1	100	0.1	2	1	-
10thF_F21 LKD	100	0	0	0	-
10thF_F22 Bed 2	100	2.4	24	3	2
10thF_F22 LKD	100	2.2	11	2	2
2nF_F14 Bed 1	100	0	0	0	-
2nF_F14 Bed 2	100	0.3	6	1	-
2nF_F14 LKD	100	0.9	5	2	-
2nF_F15 Bed 2	100	1.2	10	2	2
2nF_F15 Bed 3	100	0.4	6	1	-
2nF_F15 LKD	100	1	5	2	-
5thF_F10 Bed 1	100	0	0	0	-
5thF_F10 LKD	100	0	0	0	-
5thF_F11 Bed 1	100	0	0	0	-
5thF_F11 LKD	100	0	0	0	-
5thF_F12 Bed 1	100	0.2	4	1	-
5thF_F12 Bed 2	100	0	1	1	-
5thF_F12 LKD	100	0.1	1	1	-
5thF_F14 Bed 1	100	0.2	4	1	-
5thF_F14 Bed 2	100	0	0	0	-
5thF_F14 LKD	100	0.3	3	1	-
5thF_F15 Bed 2	100	0.7	8	1	2
5thF_F15 Bed 3	100	1.5	12	2	2
5thF_F15 LKD	100	1.6	8	2	2
5thF_F3 Bed 1	100	1.9	16	3	2
5thF_F3 Bed 3	100	1.7	14	2	2
5thF_F3 LKD	100	1.1	7	2	2
5thF_F4 Bed 1	100	2	16	3	2
5thF_F4 Bed 2	100	1.7	12	2	2
5thF_F4 LKD	100	2.1	8	2	2
5thF_F5 Bed 1	100	1.9	13	2	2
5thF_F5 LKD	100	0.5	3	1	-
5thF_F6 Bed 1	100	1.6	12	2	2
5thF_F6 LKD	100	0.9	4	1	-
5thF_F7 Bed 1	100	2.6	19	3	2

5thF_ F8 Bed 1	100	2.6	24	3	2
5thF_ F8 LKD	100	2.5	10	3	2
5thF_ F9 Bed 1	100	0.1	3	1	-
5thF_ F9 Bed 2	100	0.2	7	1	2
5thF_ F9 LKD	100	0	0	0	-
9thF_ F10 Bed 1	100	0	0	0	-
9thF_ F10 LKD	100	0	0	0	-
9thF_ F11 Bed 1	100	0.1	2	1	-
9thF_ F11 LKD	100	0.2	2	1	-
9thF_ F12 Bed 1	100	1.3	12	2	2
9thF_ F12 Bed 2	100	0.7	7	1	2
9thF_ F12 LKD	100	0.7	4	1	-
9thF_ F14 Bed 1	100	0.2	4	1	-
9thF_ F14 Bed 2	100	0	0	0	-
9thF_ F14 LKD	100	1	5	2	-
9thF_ F15 Bed 2	100	0.4	6	1	-
9thF_ F15 Bed 3	100	1.3	11	2	2
9thF_ F15 LKD	100	1.5	7	2	2
9thF_ F3 Bed 1	100	1.9	14	2	2
9thF_ F3 Bed 3	100	1.8	15	2	2
9thF_ F3 LKD	100	1.1	5	2	-
9thF_ F4 Bed 1	100	2	16	3	2
9thF_ F4 Bed 2	100	1.8	13	2	2
9thF_ F4 LKD	100	2.3	9	2	2
9thF_ F5 Bed 1	100	2.3	18	3	2
9thF_ F5 LKD	100	1.3	6	2	-
9thF_ F6 Bed 1	100	2	14	2	2
9thF_ F6 LKD	100	1.7	8	2	2
9thF_ F7 Bed 1	100	2.8	21	3	2
9thF_ F8 Bed 1	100	2.6	24	3	2
9thF_ F8 LKD	100	2.7	10	3	2
9thF_ F9 Bed 1	100	0	1	1	-
9thF_ F9 Bed 2	100	0.1	2	1	-
9thF_ F9 LKD	100	0	0	0	-
FF_ F11 LKD	100	0	0	0	-
FF_ F10 Bed 1	100	0	0	0	-
FF_ F10 LKD	100	0	0	0	-
FF_ F11 Bed 1	100	0	0	0	-
FF_ F12 Bed 1	100	0	0	0	-
FF_ F12 Bed 2	100	0	0	0	-
FF_ F12 LKD	100	0	0	0	-
FF_ F13 Bed 1	100	0	0	0	-
FF_ F13 LKD	100	0.4	3	1	-
FF_ F3 Bed 1	100	1.8	13	2	2
FF_ F3 Bed 3	100	1.7	14	2	2
FF_ F3 LKD	100	0.9	6	2	-
FF_ F4 Bed 2	100	1.8	13	2	2
FF_ F4 LKD	100	1.7	8	2	2
FF_ F5 Bed 1	100	1.6	13	2	2

FF_F5 LKD	100	0.1	1	1	-
FF_F6 Bed 1	100	1	9	2	2
FF_F6 LKD	100	0.5	3	1	-
FF_F7 Bed 1	100	1.7	13	2	2
FF_F7 Bed 2	100	2	18	3	2
FF_F7 LKD	100	2.5	11	3	2
FF_F8 Bed 1	100	3	23	3	2
FF_F8 LKD	100	2.4	9	2	2
FF_F9 Bed 1	100	0	0	0	-
FF_F9 Bed 2	100	0.1	4	1	-
FF_F9 LKD	100	0	0	0	-
GF_F1 Bed	100	0	0	0	-
GF_F1 LKD	100	0	0	0	-
GF_F2 Bed	100	0	0	0	-
GF_F2 LKD	100	0	0	0	-
Failed:					
Room Name	Occupied days (%)	Criteria 1 (%Hrs Top-Tmax>=1K)	Criteria 2 (Max. Daily Deg.Hrs)	Criteria 3 (Max.)	Criteria failing
10thF_F16 Bed 2	100	4.3	27	4	1 & 2
10thF_F17 Bed 1	100	4.7	28	4	1 & 2
10thF_F17 LKD	100	3.7	15	3	1 & 2
10thF_F20 Bed 1	100	3.9	26	4	1 & 2
10thF_F20 LKD	100	5	17	4	1 & 2
10thF_F22 Bed 1	100	3.2	25	3	1 & 2
2nF_F15 Bed1	100	3.1	24	3	1 & 2
5thF_F15 Bed 1	100	3.5	25	3	1 & 2
5thF_F3 Bed 2	100	4.2	27	4	1 & 2
5thF_F7 Bed 2	100	4	26	4	1 & 2
5thF_F7 LKD	100	3.5	13	3	1 & 2
5thF_F8 Bed 1	100	5.1	31	5	1 & 2 & 3
9thF_F15 Bed 1	100	3.5	25	3	1 & 2
9thF_F3 Bed 2	100	4.2	27	4	1 & 2
9thF_F7 Bed 2	100	4.7	32	4	1 & 2
9thF_F7 LKD	100	4.2	15	3	1 & 2
9thF_F8 Bed 1	100	5	31	5	1 & 2 & 3
FF_F3 Bed 2	100	4.1	26	4	1 & 2
FF_F4 Bed 1	100	3.7	25	4	1 & 2
FF_F8 Bed 2	100	4.7	28	4	1 & 2

TM52 Results

Location	Operative temperature (TM 52/CIBSE) (°C) - hours in range			TM59 Results
	> 26.00 (22-24)	> 26.00 (00-07 am)	> 26.00 (22-07)	
10thF_F16 Bed 1	18	5	23	Pass
10thF_F16 Bed 2	18	5	23	Pass
10thF_F16 Bed 3	19	5	24	Pass
10thF_F17 Bed 1	18	3	21	Pass
10thF_F18 Bed 1	18	5	23	Pass
10thF_F19 Bed 1	16	4	20	Pass
10thF_F19 Bed 2	17	4	21	Pass
10thF_F20 Bed 1	18	5	23	Pass
10thF_F21 Bed 1	16	5	21	Pass
10thF_F22 Bed 1	17	3	20	Pass
10thF_F22 Bed 2	18	5	23	Pass
2nF_F14 Bed 1	14	5	19	Pass
2nF_F14 Bed 2	16	3	19	Pass
2nF_F15 Bed 2	17	4	21	Pass
2nF_F15 Bed 3	18	5	23	Pass
2nF_F15 Bed1	17	3	20	Pass
5thF_F10 Bed 1	14	4	18	Pass
5thF_F11 Bed 1	14	3	17	Pass
5thF_F12 Bed 1	15	3	18	Pass
5thF_F12 Bed 2	16	4	20	Pass
5thF_F14 Bed 1	21	9	30	Pass
5thF_F14 Bed 2	15	5	20	Pass
5thF_F15 Bed 2	18	5	23	Pass
5thF_F15 Bed 1	17	3	20	Pass
5thF_F15 Bed 3	18	5	23	Pass
5thF_F3 Bed 1	18	5	23	Pass
5thF_F3 Bed 2	18	5	23	Pass
5thF_F3 Bed 3	18	5	23	Pass
5thF_F4 Bed 1	18	5	23	Pass
5thF_F4 Bed 2	17	4	21	Pass
5thF_F5 Bed 1	18	3	21	Pass
5thF_F6 Bed 1	17	3	20	Pass
5thF_F7 Bed 1	18	4	22	Pass
5thF_F7 Bed 2	18	5	23	Pass
5thF_F8 Bed 1	18	3	21	Pass
5thF_F8 Bed 1	18	6	24	Pass
5thF_F9 Bed 1	17	4	21	Pass
5thF_F9 Bed 2	18	4	22	Pass
9thF_F10 Bed 1	15	5	20	Pass
9thF_F11 Bed 1	16	5	21	Pass
9thF_F12 Bed 1	18	3	21	Pass
9thF_F12 Bed 2	18	5	23	Pass
9thF_F14 Bed 1	20	9	29	Pass
9thF_F14 Bed 2	15	5	20	Pass
9thF_F15 Bed 2	18	5	23	Pass
9thF_F15 Bed 1	17	3	20	Pass
9thF_F15 Bed 3	18	4	22	Pass

9thF_ F3 Bed 1	18	5	23	Pass
9thF_ F3 Bed 2	18	5	23	Pass
9thF_ F3 Bed 3	18	5	23	Pass
9thF_ F4 Bed 1	18	5	23	Pass
9thF_ F4 Bed 2	17	4	21	Pass
9thF_ F5 Bed 1	18	4	22	Pass
9thF_ F6 Bed 1	17	4	21	Pass
9thF_ F7 Bed 1	18	5	23	Pass
9thF_ F7 Bed 2	19	5	24	Pass
9thF_ F8 Bed 1	18	5	23	Pass
9thF_ F8 Bed 1	18	3	21	Pass
9thF_ F9 Bed 1	17	4	21	Pass
9thF_ F9 Bed 2	18	4	22	Pass
FF_ F10 Bed 1	13	2	15	Pass
FF_ F11 Bed 1	14	3	17	Pass
FF_ F12 Bed 1	14	4	18	Pass
FF_ F12 Bed 2	14	3	17	Pass
FF_ F13 Bed 1	18	12	30	Pass
FF_ F3 Bed 1	18	5	23	Pass
FF_ F3 Bed 2	18	5	23	Pass
FF_ F3 Bed 3	18	5	23	Pass
FF_ F4 Bed 1	18	4	22	Pass
FF_ F4 Bed 2	17	3	20	Pass
FF_ F5 Bed 1	18	3	21	Pass
FF_ F6 Bed 1	17	3	20	Pass
FF_ F7 Bed 1	18	4	22	Pass
FF_ F7 Bed 2	32	22	54	Fail
FF_ F8 Bed 1	18	5	23	Pass
FF_ F8 Bed 2	18	5	23	Pass
FF_ F9 Bed 1	16	3	19	Pass
FF_ F9 Bed 2	16	4	20	Pass
GF_ F1 Bed	15	4	19	Pass
GF_ F2 Bed	14	3	17	Pass

TM59 Results

SCENARIO 4: Adopting external louvers for solar gains above 250 W/m2

Passed:	126 rooms:				
Room Name	Occupied days (%)	Criteria 1 (%Hrs Top-Tmax>=1K)	Criteria 2 (Max. Daily Deg.Hrs)	Criteria 3 (Max. DeltaT)	Criteria failing
10thF_F16 Bed 1	100	0	0	0	-
10thF_F16 Bed 2	100	0.6	9	1	2
10thF_F16 Bed 3	100	0.1	2	1	-
10thF_F16 LKD	100	0	0	0	-
10thF_F17 Bed 1	100	0.1	2	1	-
10thF_F17 LKD	100	0	0	0	-
10thF_F18 Bed 1	100	0	0	0	-
10thF_F18 LKD	100	0	0	0	-
10thF_F19 Bed 1	100	0	0	0	-
10thF_F19 Bed 2	100	0	0	0	-
10thF_F19 LKD	100	0	0	0	-
10thF_F20 Bed 1	100	0	0	0	-
10thF_F20 LKD	100	0	0	0	-
10thF_F21 Bed 1	100	0	0	0	-
10thF_F21 LKD	100	0	0	0	-
10thF_F22 Bed 1	100	0	0	0	-
10thF_F22 Bed 2	100	0	0	0	-
10thF_F22 LKD	100	0	0	0	-
2nF_F14 Bed 1	100	0	0	0	-
2nF_F14 Bed 2	100	0	0	0	-
2nF_F14 LKD	100	0	0	0	-
2nF_F15 Bed 2	100	0	0	0	-
2nF_F15 Bed 3	100	0	0	0	-
2nF_F15 Bed1	100	0.1	3	1	-
2nF_F15 LKD	100	0	0	0	-
5thF_F10 Bed 1	100	0	0	0	-
5thF_F10 LKD	100	0	0	0	-
5thF_F11 Bed 1	100	0	0	0	-
5thF_F11 LKD	100	0	0	0	-
5thF_F12 Bed 1	100	0	0	0	-
5thF_F12 Bed 2	100	0	0	0	-
5thF_F12 LKD	100	0	0	0	-
5thF_F14 Bed 1	100	0	0	0	-
5thF_F14 Bed 2	100	0	0	0	-
5thF_F14 LKD	100	0	0	0	-
5thF_F15 Bed 2	100	0	0	0	-
5thF_F15 Bed 1	100	0.1	3	1	-
5thF_F15 Bed 3	100	0	0	0	-
5thF_F15 LKD	100	0	0	0	-

5thF_ F3 Bed 1	100	0	1	1	-
5thF_ F3 Bed 2	100	0.9	9	1	2
5thF_ F3 Bed 3	100	0.1	2	1	-
5thF_ F3 LKD	100	0.1	1	1	-
5thF_ F4 Bed 1	100	0	1	1	-
5thF_ F4 Bed 2	100	0	0	0	-
5thF_ F4 LKD	100	0.1	1	1	-
5thF_ F5 Bed 1	100	0	0	0	-
5thF_ F5 LKD	100	0	0	0	-
5thF_ F6 Bed 1	100	0	0	0	-
5thF_ F6 LKD	100	0	0	0	-
5thF_ F7 Bed 1	100	0	1	1	-
5thF_ F7 Bed 2	100	1.9	12	2	2
5thF_ F7 LKD	100	0.8	4	1	-
5thF_ F8 Bed 1	100	0	0	0	-
5thF_ F8 Bed 1	100	0	0	0	-
5thF_ F8 LKD	100	0	0	0	-
5thF_ F9 Bed 1	100	0	0	0	-
5thF_ F9 Bed 2	100	0	0	0	-
5thF_ F9 LKD	100	0	0	0	-
9thF_ F10 Bed 1	100	0	0	0	-
9thF_ F10 LKD	100	0	0	0	-
9thF_ F11 Bed 1	100	0	0	0	-
9thF_ F11 LKD	100	0	0	0	-
9thF_ F12 Bed 1	100	0	0	0	-
9thF_ F12 Bed 2	100	0	0	0	-
9thF_ F12 LKD	100	0	0	0	-
9thF_ F14 Bed 1	100	0	0	0	-
9thF_ F14 Bed 2	100	0	0	0	-
9thF_ F14 LKD	100	0	0	0	-
9thF_ F15 Bed 2	100	0	0	0	-
9thF_ F15 Bed 1	100	0.1	2	1	-
9thF_ F15 Bed 3	100	0	0	0	-
9thF_ F15 LKD	100	0	0	0	-
9thF_ F3 Bed 1	100	0	0	0	-
9thF_ F3 Bed 2	100	0.6	9	1	2
9thF_ F3 Bed 3	100	0	0	0	-
9thF_ F3 LKD	100	0	0	0	-
9thF_ F4 Bed 1	100	0	0	0	-
9thF_ F4 Bed 2	100	0	0	0	-
9thF_ F4 LKD	100	0.1	1	1	-
9thF_ F5 Bed 1	100	0	0	0	-
9thF_ F5 LKD	100	0	0	0	-
9thF_ F6 Bed 1	100	0	0	0	-

9thF_ F6 LKD	100	0	0	0	-
9thF_ F7 Bed 1	100	0	0	0	-
9thF_ F7 Bed 2	100	1.1	9	1	2
9thF_ F7 LKD	100	0.4	3	1	-
9thF_ F8 Bed 1	100	0	0	0	-
9thF_ F8 Bed 1	100	0	0	0	-
9thF_ F8 LKD	100	0	0	0	-
9thF_ F9 Bed 1	100	0	0	0	-
9thF_ F9 Bed 2	100	0	0	0	-
9thF_ F9 LKD	100	0	0	0	-
FF_ F11 LKD	100	0	0	0	-
FF_ F10 Bed 1	100	0	0	0	-
FF_ F10 LKD	100	0	0	0	-
FF_ F11 Bed 1	100	0	0	0	-
FF_ F12 Bed 1	100	0	0	0	-
FF_ F12 Bed 2	100	0	0	0	-
FF_ F12 LKD	100	0	0	0	-
FF_ F13 Bed 1	100	0	0	0	-
FF_ F13 LKD	100	0	0	0	-
FF_ F3 Bed 1	100	0	0	0	-
FF_ F3 Bed 2	100	0.8	9	1	2
FF_ F3 Bed 3	100	0	1	1	-
FF_ F3 LKD	100	0	0	0	-
FF_ F4 Bed 1	100	0.9	9	1	2
FF_ F4 Bed 2	100	0	0	0	-
FF_ F4 LKD	100	0	0	0	-
FF_ F5 Bed 1	100	0	0	0	-
FF_ F5 LKD	100	0	0	0	-
FF_ F6 Bed 1	100	0	0	0	-
FF_ F6 LKD	100	0	0	0	-
FF_ F7 Bed 1	100	0	0	0	-
FF_ F7 Bed 2	100	1	8	1	2
FF_ F7 LKD	100	0.6	4	1	-
FF_ F8 Bed 1	100	0	0	0	-
FF_ F8 Bed 2	100	0	0	0	-
FF_ F8 LKD	100	0	0	0	-
FF_ F9 Bed 1	100	0	0	0	-
FF_ F9 Bed 2	100	0	0	0	-
FF_ F9 LKD	100	0	0	0	-
GF_ F1 Bed	100	0	0	0	-
GF_ F1 LKD	100	0	0	0	-
GF_ F2 Bed	100	0	0	0	-
GF_ F2 LKD	100	0	0	0	-

TM52 Results

Location	Operative temperature (TM 52/CIBSE) (°C) - hours in range			TM59 Results
	> 26.00 (22-24)	> 26.00 (00-07)	> 26.00 (22-07)	
10thF_F16 Bed 1	18	4	22	Pass
10thF_F16 Bed 2	18	3	21	Pass
10thF_F16 Bed 3	18	5	23	Pass
10thF_F17 Bed 1	17	3	20	Pass
10thF_F18 Bed 1	14	3	17	Pass
10thF_F19 Bed 1	14	3	17	Pass
10thF_F19 Bed 2	14	3	17	Pass
10thF_F20 Bed 1	15	3	18	Pass
10thF_F21 Bed 1	14	2	16	Pass
10thF_F22 Bed 1	12	3	15	Pass
10thF_F22 Bed 2	16	4	20	Pass
2nF_F14 Bed 1	13	2	15	Pass
2nF_F14 Bed 2	14	2	16	Pass
2nF_F15 Bed 2	14	3	17	Pass
2nF_F15 Bed 3	14	3	17	Pass
2nF_F15 Bed1	13	3	16	Pass
5thF_F10 Bed 1	12	2	14	Pass
5thF_F11 Bed 1	13	2	15	Pass
5thF_F12 Bed 1	11	2	13	Pass
5thF_F12 Bed 2	14	3	17	Pass
5thF_F14 Bed 1	15	6	21	Pass
5thF_F14 Bed 2	13	4	17	Pass
5thF_F15 Bed 2	14	3	17	Pass
5thF_F15 Bed 1	14	3	17	Pass
5thF_F15 Bed 3	15	3	18	Pass
5thF_F3 Bed 1	18	4	22	Pass
5thF_F3 Bed 2	18	3	21	Pass
5thF_F3 Bed 3	18	5	23	Pass
5thF_F4 Bed 1	18	4	22	Pass
5thF_F4 Bed 2	13	3	16	Pass
5thF_F5 Bed 1	15	3	18	Pass
5thF_F6 Bed 1	13	3	16	Pass
5thF_F7 Bed 1	17	3	20	Pass
5thF_F7 Bed 2	18	3	21	Pass
5thF_F8 Bed 1	14	3	17	Pass
5thF_F8 Bed 1	16	4	20	Pass
5thF_F9 Bed 1	14	3	17	Pass
5thF_F9 Bed 2	15	3	18	Pass
9thF_F10 Bed 1	13	2	15	Pass
9thF_F11 Bed 1	14	2	16	Pass
9thF_F12 Bed 1	11	2	13	Pass
9thF_F12 Bed 2	14	3	17	Pass
9thF_F14 Bed 1	15	6	21	Pass
9thF_F14 Bed 2	13	2	15	Pass
9thF_F15 Bed 2	14	3	17	Pass
9thF_F15 Bed 1	14	3	17	Pass
9thF_F15 Bed 3	15	3	18	Pass

9thF_ F3 Bed 1	18	4	22	Pass
9thF_ F3 Bed 2	18	3	21	Pass
9thF_ F3 Bed 3	18	5	23	Pass
9thF_ F4 Bed 1	16	4	20	Pass
9thF_ F4 Bed 2	13	3	16	Pass
9thF_ F5 Bed 1	15	3	18	Pass
9thF_ F6 Bed 1	13	3	16	Pass
9thF_ F7 Bed 1	16	3	19	Pass
9thF_ F7 Bed 2	18	3	21	Pass
9thF_ F8 Bed 1	16	4	20	Pass
9thF_ F8 Bed 1	14	3	17	Pass
9thF_ F9 Bed 1	14	3	17	Pass
9thF_ F9 Bed 2	15	3	18	Pass
FF_ F10 Bed 1	9	1	10	Pass
FF_ F11 Bed 1	9	1	10	Pass
FF_ F12 Bed 1	14	2	16	Pass
FF_ F12 Bed 2	14	2	16	Pass
FF_ F13 Bed 1	17	9	26	Pass
FF_ F3 Bed 1	17	3	20	Pass
FF_ F3 Bed 2	18	3	21	Pass
FF_ F3 Bed 3	18	5	23	Pass
FF_ F4 Bed 1	18	3	21	Pass
FF_ F4 Bed 2	13	3	16	Pass
FF_ F5 Bed 1	14	3	17	Pass
FF_ F6 Bed 1	12	2	14	Pass
FF_ F7 Bed 1	15	3	18	Pass
FF_ F7 Bed 2	26	16	42	Fail
FF_ F8 Bed 1	16	3	19	Pass
FF_ F8 Bed 2	14	3	17	Pass
FF_ F9 Bed 1	14	3	17	Pass
FF_ F9 Bed 2	14	3	17	Pass
GF_ F1 Bed	14	3	17	Pass
GF_ F2 Bed	14	2	16	Pass

TM59 Results

SCENARIO 5: according to the above results adopting mechanical comfort cooling isn't a must

7.3 Overheating Occupied Room Results – DSY2 2050

SCENARIO 1: Adopting external louvres for solar gains above 250 W/m2

Passed:	124 rooms:			
Room Name	Criteria 1 (%Hrs Top-Tmax>=1K)	Criteria 2 (Max. Daily Deg.Hrs)	Criteria 3 (Max. DeltaT)	Criteria failing
10thF_F16 Bed 1	1.2	15	2	2
10thF_F16 Bed 2	2.7	28	3	2
10thF_F16 Bed 3	1.9	22	2	2
10thF_F16 LKD	0.8	5	2	-
10thF_F17 Bed 1	2.2	22	2	2
10thF_F17 LKD	0.9	6	2	-
10thF_F18 Bed 1	0.3	6	1	-
10thF_F18 LKD	0.3	3	1	-
10thF_F19 Bed 1	0.1	4	1	-
10thF_F19 Bed 2	0.2	4	1	-
10thF_F19 LKD	0.1	1	1	-
10thF_F20 Bed 1	0.5	9	2	2
10thF_F20 LKD	0.9	6	2	-
10thF_F21 Bed 1	0	1	1	-
10thF_F21 LKD	0	0	0	-
10thF_F22 Bed 1	0.7	10	2	2
10thF_F22 Bed 2	0.5	10	2	2
10thF_F22 LKD	0.3	4	1	-
2nF_F14 Bed 1	0	0	0	-
2nF_F14 Bed 2	0.3	6	1	-
2nF_F14 LKD	0.7	5	2	-
2nF_F15 Bed 2	0.7	9	2	2
2nF_F15 Bed 3	0.3	5	1	-
2nF_F15 Bed1	1.6	15	2	2
2nF_F15 LKD	1	5	2	-
5thF_F10 Bed 1	0	0	0	-
5thF_F10 LKD	0	0	0	-
5thF_F11 Bed 1	0	0	0	-
5thF_F11 LKD	0	0	0	-
5thF_F12 Bed 1	0.2	5	1	-
5thF_F12 Bed 2	0.1	3	1	-
5thF_F12 LKD	0.2	2	1	-
5thF_F14 Bed 1	0.4	6	1	-
5thF_F14 Bed 2	0	0	0	-
5thF_F14 LKD	0.6	5	2	-
5thF_F15 Bed 2	0.3	6	1	-
5thF_F15 Bed 1	1.7	15	2	2
5thF_F15 Bed 3	1	12	2	2
5thF_F15 LKD	1.3	8	2	2
5thF_F3 Bed 1	1.3	16	2	2
5thF_F3 Bed 2	2.7	32	3	2

5thF_ F3 Bed 3	1.9	21	2	2
5thF_ F3 LKD	0.8	6	2	-
5thF_ F4 Bed 1	1.9	21	2	2
5thF_ F4 Bed 2	1	16	2	2
5thF_ F4 LKD	2	12	2	2
5thF_ F5 Bed 1	0.8	11	1	2
5thF_ F5 LKD	0.3	4	1	-
5thF_ F6 Bed 1	0.7	11	1	2
5thF_ F6 LKD	0.5	5	1	-
5thF_ F7 Bed 1	1.7	20	2	2
5thF_ F8 Bed 1	0.8	11	2	2
5thF_ F8 Bed 1	0.8	12	2	2
5thF_ F8 LKD	0.4	4	1	-
5thF_ F9 Bed 1	0.4	9	1	2
5thF_ F9 Bed 2	0.3	6	1	-
5thF_ F9 LKD	0.2	2	1	-
9thF_ F10 Bed 1	0	0	0	-
9thF_ F10 LKD	0	0	0	-
9thF_ F11 Bed 1	0	0	0	-
9thF_ F11 LKD	0.1	1	1	-
9thF_ F12 Bed 1	0.3	5	1	-
9thF_ F12 Bed 2	0.2	5	1	-
9thF_ F12 LKD	0.3	3	1	-
9thF_ F14 Bed 1	0.4	6	1	-
9thF_ F14 Bed 2	0	0	0	-
9thF_ F14 LKD	0.8	6	2	-
9thF_ F15 Bed 2	0.3	6	1	-
9thF_ F15 Bed 1	1.6	15	2	2
9thF_ F15 Bed 3	0.6	8	2	2
9thF_ F15 LKD	1	6	2	-
9thF_ F3 Bed 1	1.1	15	2	2
9thF_ F3 Bed 2	2.5	26	3	2
9thF_ F3 Bed 3	1.8	21	2	2
9thF_ F3 LKD	0.6	5	2	-
9thF_ F4 Bed 1	1.3	16	2	2
9thF_ F4 Bed 2	0.8	13	2	2
9thF_ F4 LKD	1.8	12	2	2
9thF_ F5 Bed 1	0.7	12	2	2
9thF_ F5 LKD	0.4	4	1	-
9thF_ F6 Bed 1	0.9	14	2	2
9thF_ F6 LKD	0.5	4	1	-
9thF_ F7 Bed 1	1.5	17	2	2
9thF_ F7 Bed 2	2.9	30	3	2
9thF_ F7 LKD	2.2	15	3	2
9thF_ F8 Bed 1	0.7	12	2	2
9thF_ F8 Bed 1	0.7	11	2	2
9thF_ F8 LKD	0.4	4	1	-
9thF_ F9 Bed 1	0.3	7	1	2
9thF_ F9 Bed 2	0.3	6	1	-

9thF_F9 LKD	0.2	2	1	-
FF_F11 LKD	0	0	0	-
FF_F10 Bed 1	0	0	0	-
FF_F10 LKD	0	0	0	-
FF_F11 Bed 1	0	0	0	-
FF_F12 Bed 1	0	0	0	-
FF_F12 Bed 2	0	0	0	-
FF_F12 LKD	0	0	0	-
FF_F13 Bed 1	0.4	8	1	2
FF_F13 LKD	0.4	3	1	-
FF_F3 Bed 1	0.9	14	2	2
FF_F3 Bed 2	2.6	28	3	2
FF_F3 Bed 3	1.8	21	2	2
FF_F3 LKD	0.6	6	2	-
FF_F4 Bed 1	2.5	26	3	2
FF_F4 Bed 2	1.1	14	2	2
FF_F4 LKD	1.6	12	2	2
FF_F5 Bed 1	0.6	10	1	2
FF_F5 LKD	0.1	2	1	-
FF_F6 Bed 1	0.5	9	1	2
FF_F6 LKD	0.3	3	1	-
FF_F7 Bed 1	1.1	14	2	2
FF_F7 Bed 2	2.5	28	3	2
FF_F7 LKD	2.7	18	3	2
FF_F8 Bed 1	0.5	8	1	2
FF_F8 Bed 2	0.7	9	2	2
FF_F8 LKD	0.3	4	1	-
FF_F9 Bed 1	0.3	7	1	2
FF_F9 Bed 2	0.3	5	1	-
FF_F9 LKD	0.2	2	1	-
GF_F1 Bed	0	1	1	-
GF_F1 LKD	0.1	1	1	-
GF_F2 Bed	0	0	0	-
GF_F2 LKD	0	0	0	-
Failed:				
Room Name	Criteria 1 (%Hrs Top-Tmax>=1K)	Criteria 2 (Max. Daily Deg.Hrs)	Criteria 3 (Max. DeltaT)	Criteria failing
5thF_F7 Bed 2	3.3	34	4	1 & 2
5thF_F7 LKD	3.3	19	3	1 & 2

7.4 Overheating Occupied Room Results – DSY3 2080

SCENARIO 4: Adopting external louvers for solar gains above 250 W/m²

Passed:	44 rooms:			
Room Name	Criteria 1 (%Hrs Top-Tmax>=1K)	Criteria 2 (Max. Daily Deg.Hrs)	Criteria 3 (Max. DeltaT)	Criteria failing
10thF_F18 Bed 1	2.9	49	4	2
10thF_F18 LKD	2.5	22	4	2
10thF_F19 Bed 1	2.5	40	4	2
10thF_F19 Bed 2	2.8	45	4	2
10thF_F19 LKD	2.3	19	3	2
10thF_F21 Bed 1	2.2	35	3	2
10thF_F21 LKD	1.7	14	3	2
2nF_F14 Bed 1	2	32	3	2
2nF_F14 Bed 2	2.9	43	4	2
2nF_F15 Bed 3	2.9	45	4	2
5thF_F10 Bed 1	1.8	28	3	2
5thF_F10 LKD	0.8	9	2	2
5thF_F11 Bed 1	1.7	25	3	2
5thF_F11 LKD	1.8	13	3	2
5thF_F12 Bed 1	2.8	41	4	2
5thF_F12 Bed 2	2.4	38	4	2
5thF_F12 LKD	2.5	23	4	2
5thF_F14 Bed 2	2.3	38	3	2
5thF_F9 LKD	2.8	24	4	2
9thF_F10 Bed 1	2	33	3	2
9thF_F10 LKD	1.3	12	3	2
9thF_F11 Bed 1	2.1	33	3	2
9thF_F11 LKD	2.2	18	3	2
9thF_F12 Bed 1	3	45	4	2
9thF_F12 Bed 2	2.8	44	4	2
9thF_F12 LKD	2.8	25	4	2
9thF_F14 Bed 1	3	48	4	2
9thF_F14 Bed 2	2	35	3	2
9thF_F15 Bed 2	2.9	49	4	2
9thF_F9 LKD	2.6	22	4	2
FF_F11 LKD	1	9	2	2
FF_F10 Bed 1	1.3	22	3	2
FF_F10 LKD	0.7	6	2	-
FF_F11 Bed 1	1.1	17	2	2
FF_F12 Bed 1	2	29	3	2
FF_F12 Bed 2	2.1	29	3	2
FF_F12 LKD	2	14	3	2

FF_F13 LKD	2.8	20	4	2
FF_F9 Bed 1	2.6	51	4	2
FF_F9 LKD	2.4	21	4	2
GF_F1 Bed	2.1	38	4	2
GF_F1 LKD	2.5	21	4	2
GF_F2 Bed	1.7	32	3	2
GF_F2 LKD	1.4	14	3	2
Failed:				
Room Name	Criteria 1 (%Hrs Top-Tmax>=1K)	Criteria 2 (Max. Daily Deg.Hrs)	Criteria 3 (Max. DeltaT)	Criteria failing
10thF_F16 Bed 1	4.5	72	5	1 & 2 & 3
10thF_F16 Bed 2	6.8	92	6	1 & 2 & 3
10thF_F16 Bed 3	5.3	83	5	1 & 2 & 3
10thF_F16 LKD	4.1	34	5	1 & 2 & 3
10thF_F17 Bed 1	5.4	81	6	1 & 2 & 3
10thF_F17 LKD	4.3	36	5	1 & 2 & 3
10thF_F20 Bed 1	3.8	63	5	1 & 2 & 3
10thF_F20 LKD	4.9	39	5	1 & 2 & 3
10thF_F22 Bed 1	3.5	55	5	1 & 2 & 3
10thF_F22 Bed 2	3.6	64	5	1 & 2 & 3
10thF_F22 LKD	3	25	4	1 & 2
2nF_F14 LKD	3.4	27	4	1 & 2
2nF_F15 Bed 2	3.3	48	4	1 & 2
2nF_F15 Bed1	4.6	61	5	1 & 2 & 3
2nF_F15 LKD	4.6	35	5	1 & 2 & 3
5thF_F14 Bed 1	3.2	51	4	1 & 2
5thF_F14 LKD	3.6	29	4	1 & 2
5thF_F15 Bed 2	3.3	57	4	1 & 2
5thF_F15 Bed 1	4.9	72	6	1 & 2 & 3
5thF_F15 Bed 3	3.6	62	5	1 & 2 & 3
5thF_F15 LKD	4.8	45	5	1 & 2 & 3
5thF_F3 Bed 1	4.7	79	5	1 & 2 & 3
5thF_F3 Bed 2	7.3	95	6	1 & 2 & 3
5thF_F3 Bed 3	5.2	89	6	1 & 2 & 3
5thF_F3 LKD	4.9	43	5	1 & 2 & 3
5thF_F4 Bed 1	5.1	86	6	1 & 2 & 3
5thF_F4 Bed 2	4.2	78	5	1 & 2 & 3
5thF_F4 LKD	6.1	51	6	1 & 2 & 3
5thF_F5 Bed 1	4.1	75	5	1 & 2 & 3
5thF_F5 LKD	4	35	4	1 & 2
5thF_F6 Bed 1	4.1	75	5	1 & 2 & 3
5thF_F6 LKD	4.4	38	5	1 & 2 & 3
5thF_F7 Bed 1	4.8	81	6	1 & 2 & 3

5thF_ F7 Bed 2	9.2	101	7	1 & 2 & 3
5thF_ F7 LKD	8.6	57	6	1 & 2 & 3
5thF_ F8 Bed 1	4	67	5	1 & 2 & 3
5thF_ F8 Bed 1	3.8	69	5	1 & 2 & 3
5thF_ F8 LKD	4.2	36	4	1 & 2
5thF_ F9 Bed 1	3.4	58	5	1 & 2 & 3
5thF_ F9 Bed 2	3.7	60	5	1 & 2 & 3
9thF_ F14 LKD	3.9	31	5	1 & 2 & 3
9thF_ F15 Bed 1	4.5	68	5	1 & 2 & 3
9thF_ F15 Bed 3	3.3	53	5	1 & 2 & 3
9thF_ F15 LKD	4.6	37	5	1 & 2 & 3
9thF_ F3 Bed 1	4.5	72	5	1 & 2 & 3
9thF_ F3 Bed 2	6.9	92	6	1 & 2 & 3
9thF_ F3 Bed 3	5.3	82	6	1 & 2 & 3
9thF_ F3 LKD	4.4	35	5	1 & 2 & 3
9thF_ F4 Bed 1	4.6	79	5	1 & 2 & 3
9thF_ F4 Bed 2	4.2	76	5	1 & 2 & 3
9thF_ F4 LKD	5.9	50	6	1 & 2 & 3
9thF_ F5 Bed 1	4.1	71	5	1 & 2 & 3
9thF_ F5 LKD	4.3	36	4	1 & 2
9thF_ F6 Bed 1	4.3	76	5	1 & 2 & 3
9thF_ F6 LKD	4.5	37	4	1 & 2
9thF_ F7 Bed 1	4.9	80	5	1 & 2 & 3
9thF_ F7 Bed 2	7.5	94	6	1 & 2 & 3
9thF_ F7 LKD	7.2	53	6	1 & 2 & 3
9thF_ F8 Bed 1	3.8	69	5	1 & 2 & 3
9thF_ F8 Bed 1	4	67	5	1 & 2 & 3
9thF_ F8 LKD	4.3	36	4	1 & 2
9thF_ F9 Bed 1	3	54	4	1 & 2
9thF_ F9 Bed 2	3.1	50	4	1 & 2
FF_ F13 Bed 1	3.5	59	4	1 & 2
FF_ F3 Bed 1	4.2	70	5	1 & 2 & 3
FF_ F3 Bed 2	7	92	6	1 & 2 & 3
FF_ F3 Bed 3	5	80	5	1 & 2 & 3
FF_ F3 LKD	4.6	39	5	1 & 2 & 3
FF_ F4 Bed 1	6.6	83	6	1 & 2 & 3
FF_ F4 Bed 2	4.2	69	5	1 & 2 & 3
FF_ F4 LKD	5.3	45	5	1 & 2 & 3
FF_ F5 Bed 1	3.8	57	4	1 & 2
FF_ F5 LKD	3.4	26	3	1 & 2
FF_ F6 Bed 1	3.5	57	4	1 & 2
FF_ F6 LKD	3.8	31	4	1 & 2
FF_ F7 Bed 1	4.3	70	5	1 & 2 & 3
FF_ F7 Bed 2	8	92	6	1 & 2 & 3

FF_F7 LKD	8.2	56	6	1 & 2 & 3
FF_F8 Bed 1	3.6	61	5	1 & 2 & 3
FF_F8 Bed 2	3.9	64	5	1 & 2 & 3
FF_F8 LKD	4	36	4	1 & 2
FF_F9 Bed 2	3.3	50	4	1 & 2

8.0 CONCLUSIONS

The overheating analysis has been carried out according to CIBSE TM52: 2013 and TM59:2017 for the proposed development to assess the risk of overheating during the summer season.

The CIBSE TM59; 2017 guide states the minimum requirement to pass the overheating assessment is to satisfy two of the three criteria using the single DSY1 file and that it is not mandatory to pass using the DSY2 and DSY3 weather files.

- **CIBSE TM52 Compliance**

To meet the compliance requirements and minimise the risk of overheating in extreme weather conditions, the feasibility of natural ventilation, passive cooling measures, and mechanical comfort cooling have been tested. According to the cooling hierarchy, passive cooling measures have been prioritised first, then active measures have been investigated further.

Concluding this TM52 TM59 Overheating analysis along with the cooling hierarchy exercise indicates that active cooling loads could be avoided if external louvres are adopted in all the occupied spaces. However, cooling will be required in order for all habitable office spaces to achieve comfortable internal temperatures in future climate weather scenarios.