


PLEASE ALSO REFER TO TREE SURVEY AND ARBORICULTURAL IMPACT ASSESSMENT

#### TREE PROTECTION

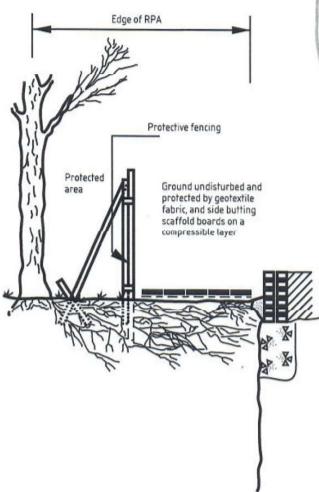


New walls  
 Walls to be demolished  
 Proposed new work

#### TREE PROTECTION

- The slope of ground should be taken into account so no material runs towards tree
- Notice boards, cables or other services should not be attached to tree
- Care should be taken when planning site to ensure wide or tall loads do not come into contact with retained tree

#### TREE PROTECTION

- 2m high Heras fencing to be provided around tree and must be in place until all construction and hard surfacing is complete
- No work to take place within fenced off area
- Materials must be stored on existing hard surface and provision for spillage must be made
- Cement/concrete mixing must take place over a suitable hard surface away from treezone

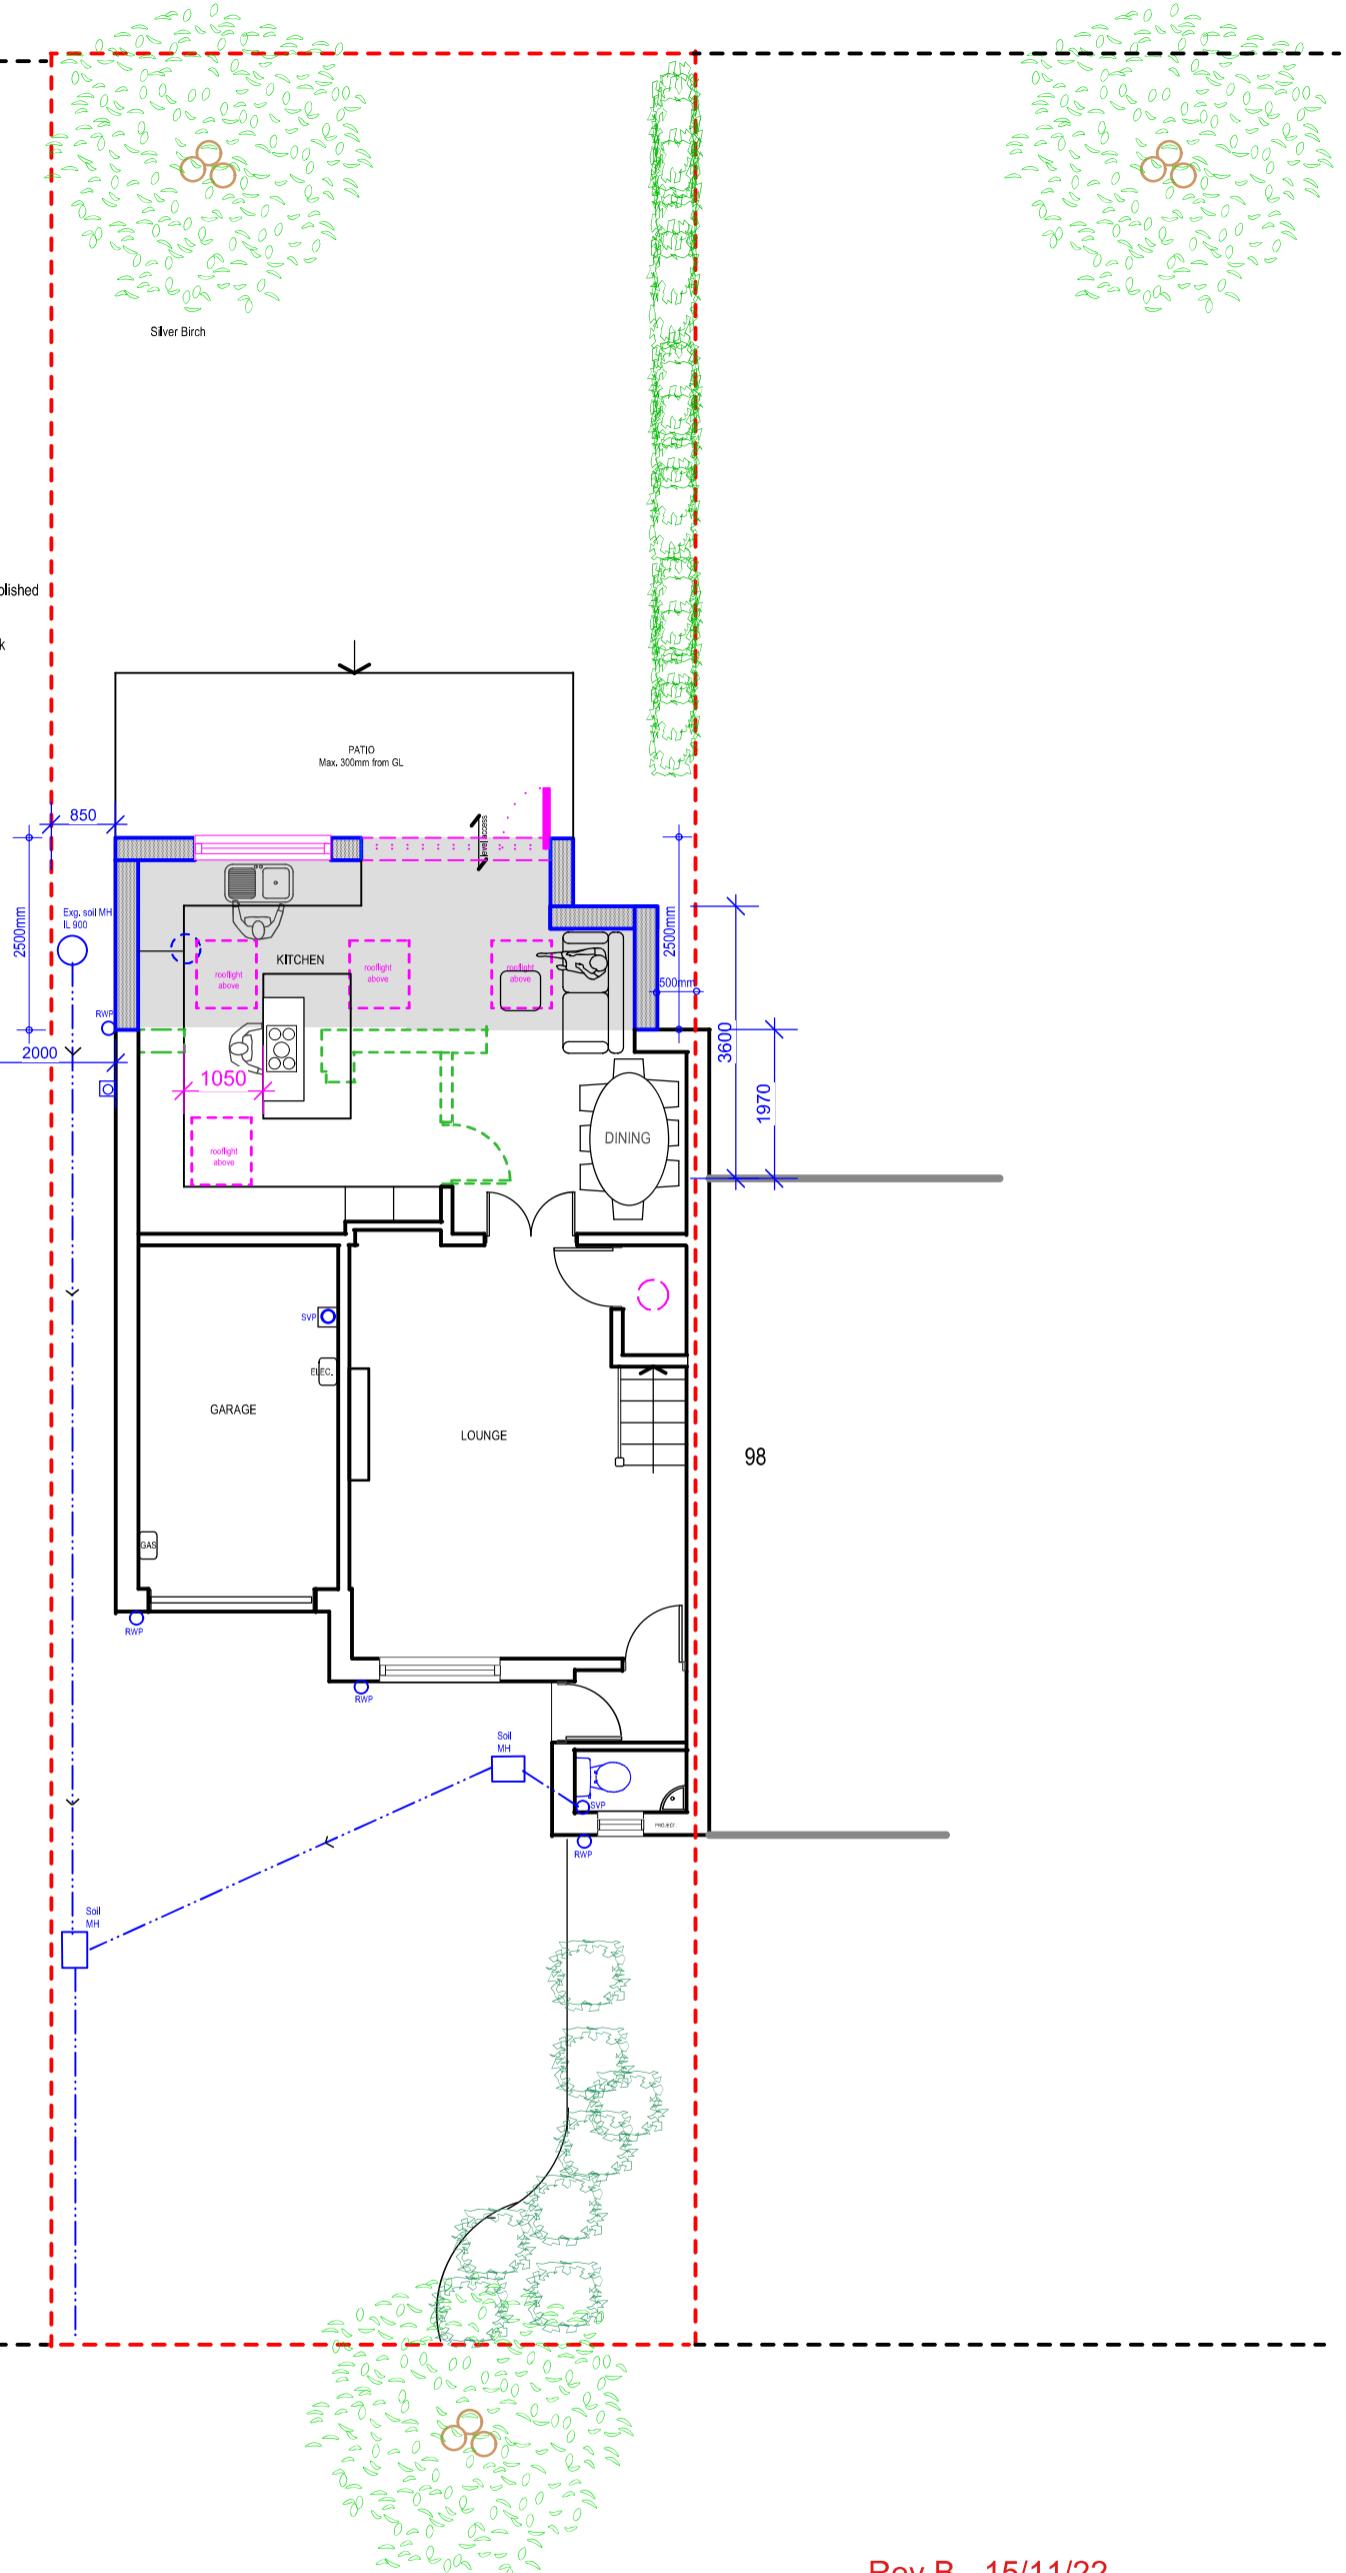

Rev B - 15/11/22  
Rear extension revised

Rev A - 18/08/22  
Tree protection added

Purpose - Householder planning application only



tel : 0796 222 3141  
email : sandeep@sskarchitects.co.uk

scale - 1 : 100 @ A3

0 1m 2m 3m 4m 5m 6m

All dimensions to be checked on site.  
All omissions & discrepancies to be reported to the designer.

© SSK architects owns the copyright of this drawing which must not be reproduced in whole or part without the written permission.

PROJECT: 100 Chamberlain Way, Pinner, HA5 2AT DATE: 16/06/2022

DWG. TITLE: GROUND FLOOR

08 REVISION: B

PROPOSED